

XC9281B18E0R-G Evaluation Board User Manual

5.5V/0.6A Step-down DC/DC Converter with HiSAT-COT Control

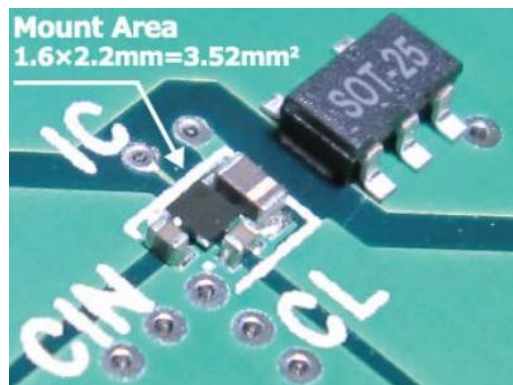
CAUTION

ENGINEERING EVALUATION PURPOSES ONLY

This evaluation board is made for the purpose of the product evaluation.
It is strictly prohibited to use this evaluation board for any other purpose.

Torex Semiconductor does not guarantee that all samples will perform in exactly the same way and we recommend that you always consult our product data sheets for the minimum and maximum specifications.

It is also important that you evaluate all our products carefully before mass

XC9281B18E0R-G Evaluation Board*HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters***Evaluation Board Picture****Evaluation Board SPEC**

						Ta=25°C
		CONDITON.	MIN.	TYP.	MAX.	UNIT
Vin	Input Voltage Range	-	2.5	-	5.5	V
Vout	Setting Output Voltage	-	-	1.8	-	V
Iout	Output Current	-	0	-	600	mA
fosc	Switching frequency	-	-	6.0	-	MHz

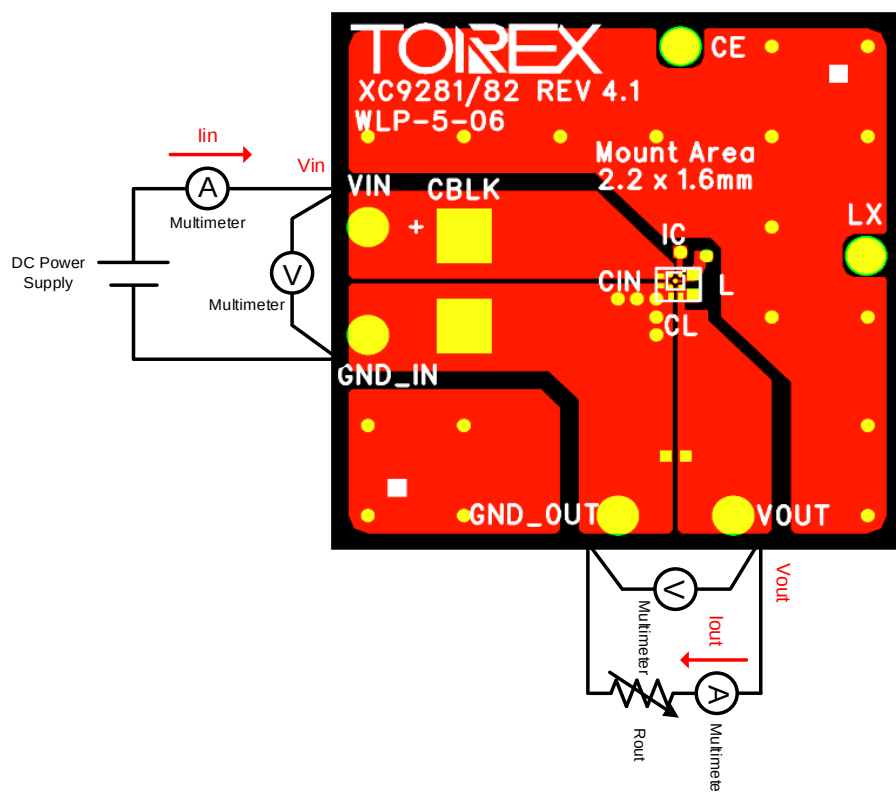
XC9281/XC9282 Series Features

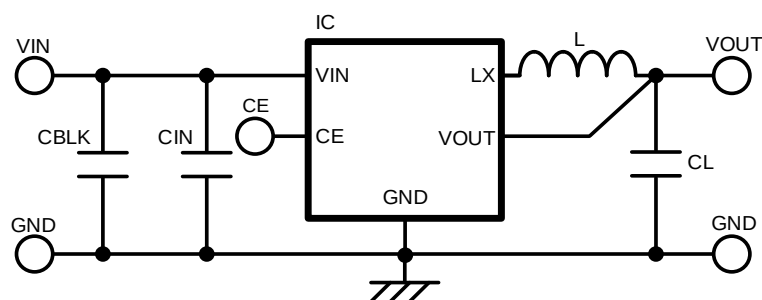
- Input Voltage Range 2.5V ~ 5.5V
- Output Voltage Range 0.7V ~ 3.6V (step 0.05V)
- Max Output Current 600mA max.
- Switching frequency 4MHz or 6MHz
- Max Duty Cycle 100%
- Small Solution Size 3.52 mm²
- Fast Load Transient Response
- 0.6 x 0.3mm Ceramic Cap. Available
- Low EMI Noise

XC9281B18E0R-G Evaluation Board

HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

Quick Start Procedure



XC9281B18E0R-G Evaluation Board*HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters***Schematic****BOM****Required Circuit Component**

Item	Value	Description	Size [mm]	Part Number	Manufacture
IC	-	5.5V/0.6A Step-down DC/DC	WLP-5-06	XC9282B33E0R-G	TOREX
L	0.47uH	Inductor, 0.47uH	1005	MCEE1005TR47MHN	Taiyo Yuden
CIN	4.7uF	Ceramic cap., 6.3V/4.7uF	0603	GRM035R60J475ME15D	Murata
CL	4.7uF	Ceramic cap., 6.3V/4.7uF	0603	GRM035R60J475ME15D	Murata

Additional Demo Board Circuit Components

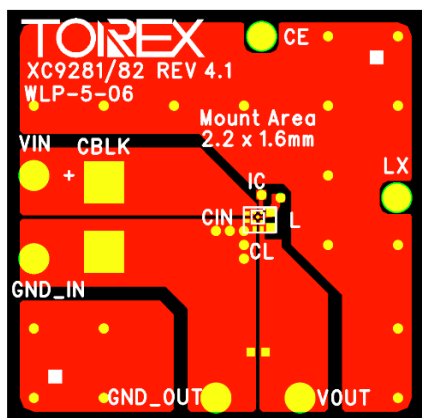
Item	Value	Description	Size [mm]	Part Number	Manufacture
CBLK	10uF	Ceramic cap., 50V/10uF	3225	CGA6P3X7S1H106K	TDK

XC9281B18E0R-G Evaluation Board

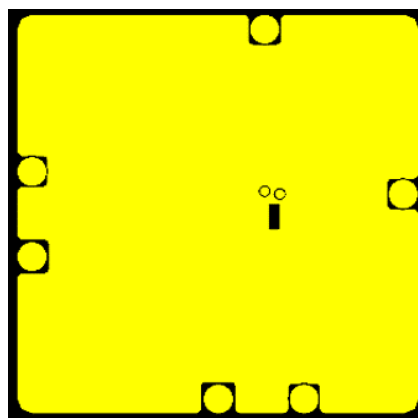
HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

PCB Layout

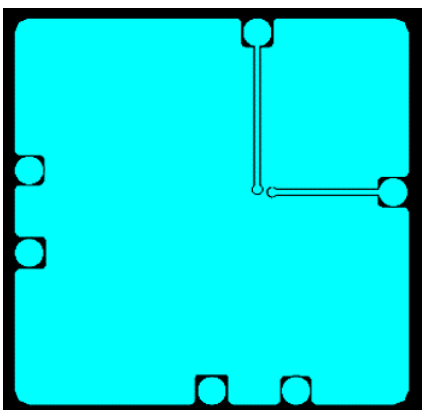
Layer 1



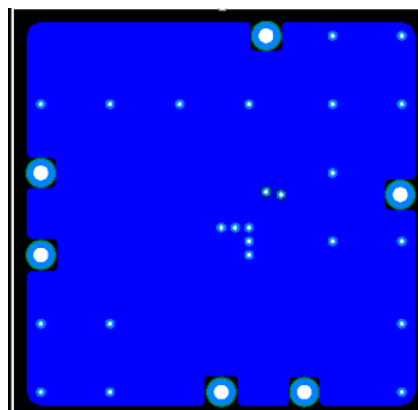
Layer 2

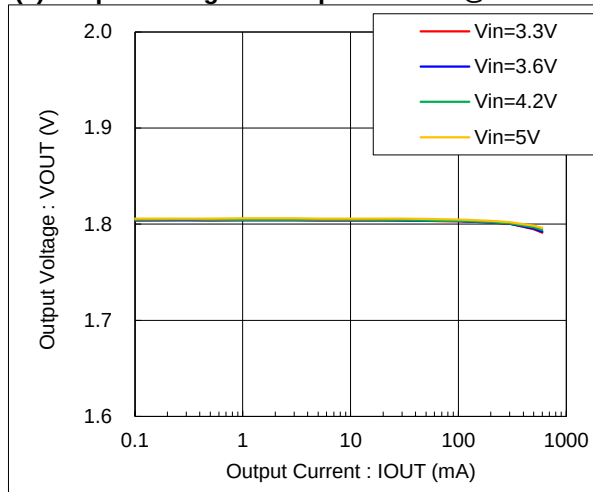
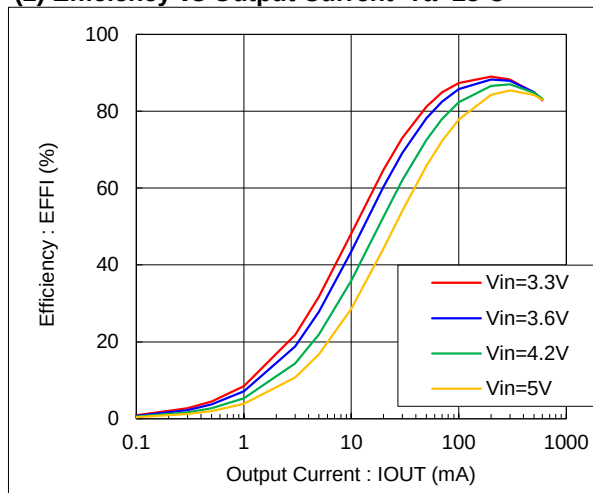
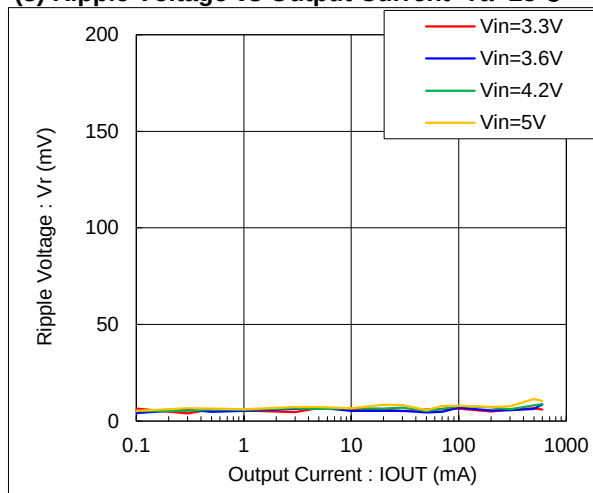


Layer 3



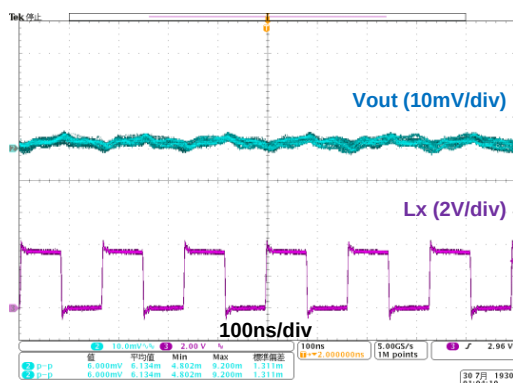
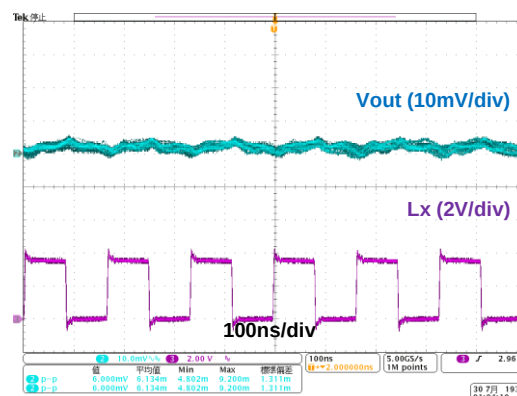
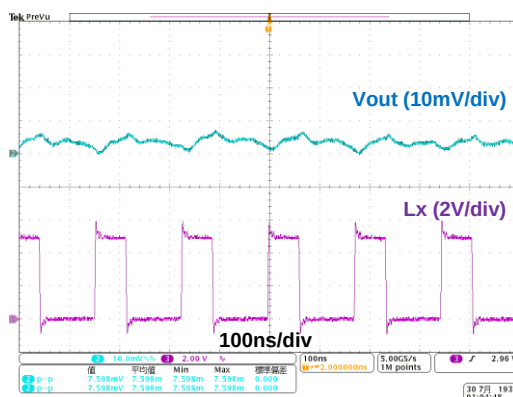
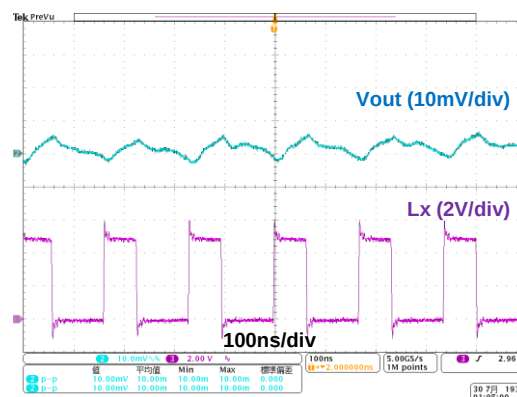
Layer 4



XC9281B18E0R-G Evaluation Board*HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters***Test Result****(1) Output Voltage vs Output Current @Ta=25°C****(2) Efficiency vs Output Current Ta=25°C****(3) Ripple Voltage vs Output Current Ta=25°C**

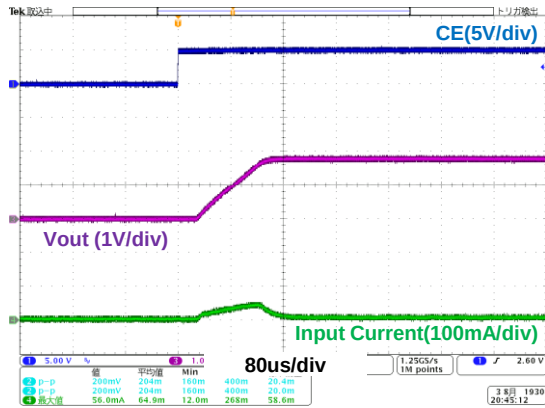
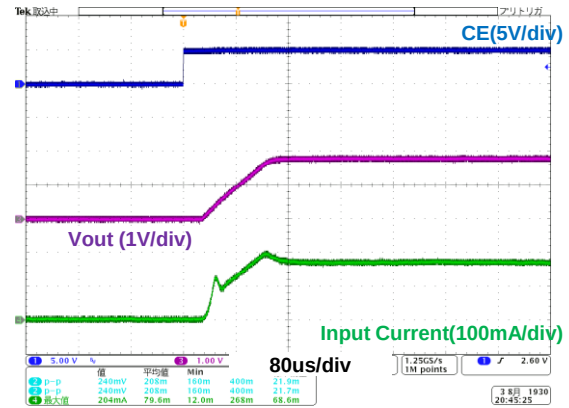
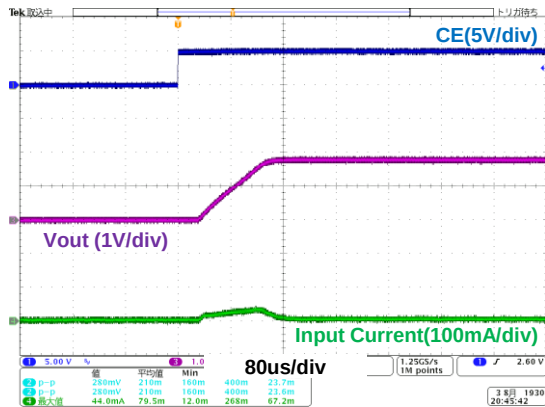
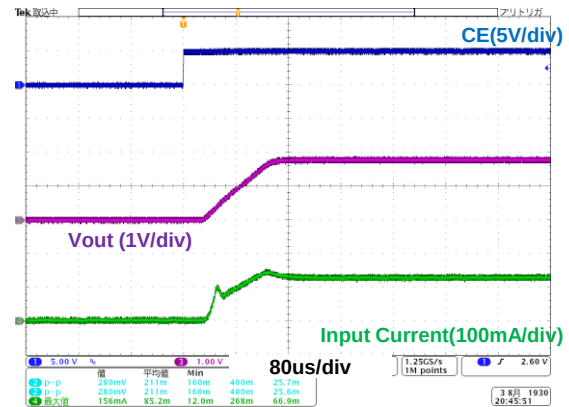
XC9281B18E0R-G Evaluation Board

HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

Test Result**(4) Output Voltage Waveform @ Ta=25°C****(4-1) Vin = 3.6V, Iout = 1mA****(4-2) Vin = 3.6V, Iout = 300mA****(4-3) Vin = 5V, Iout = 1mA****(4-4) Vin = 5V, Iout = 300mA**

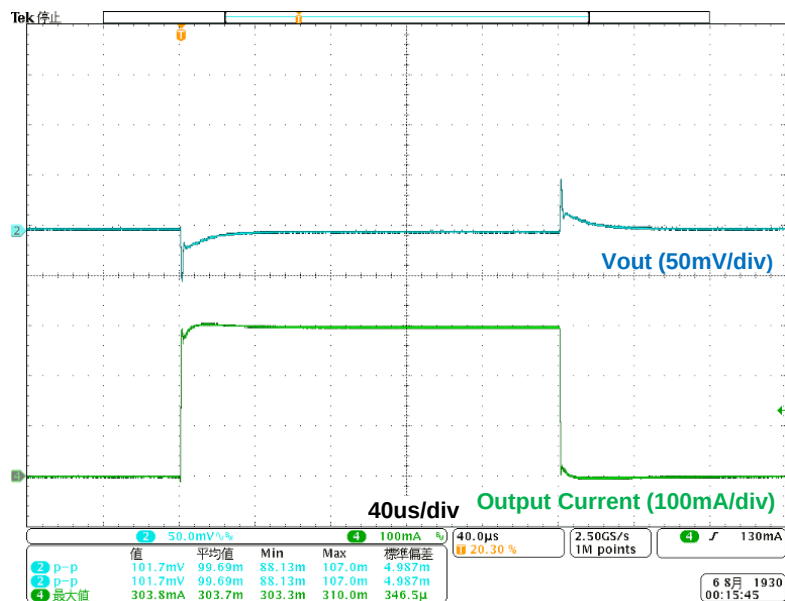
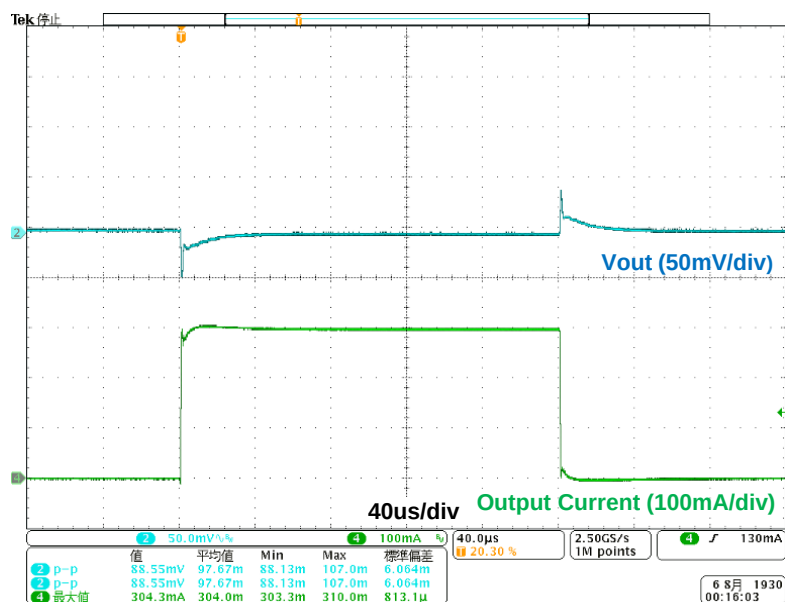
XC9281B18E0R-G Evaluation Board

HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

Test Result**(5) Start-up Waveform @ Ta=25°C****(5-1) Vin = 3.6V, Iout = 10mA****(5-2) Vin = 3.6V, Iout = 300mA****(5-3) Vin = 5V, Iout = 10mA****(5-4) Vin = 5V, Iout = 300mA**

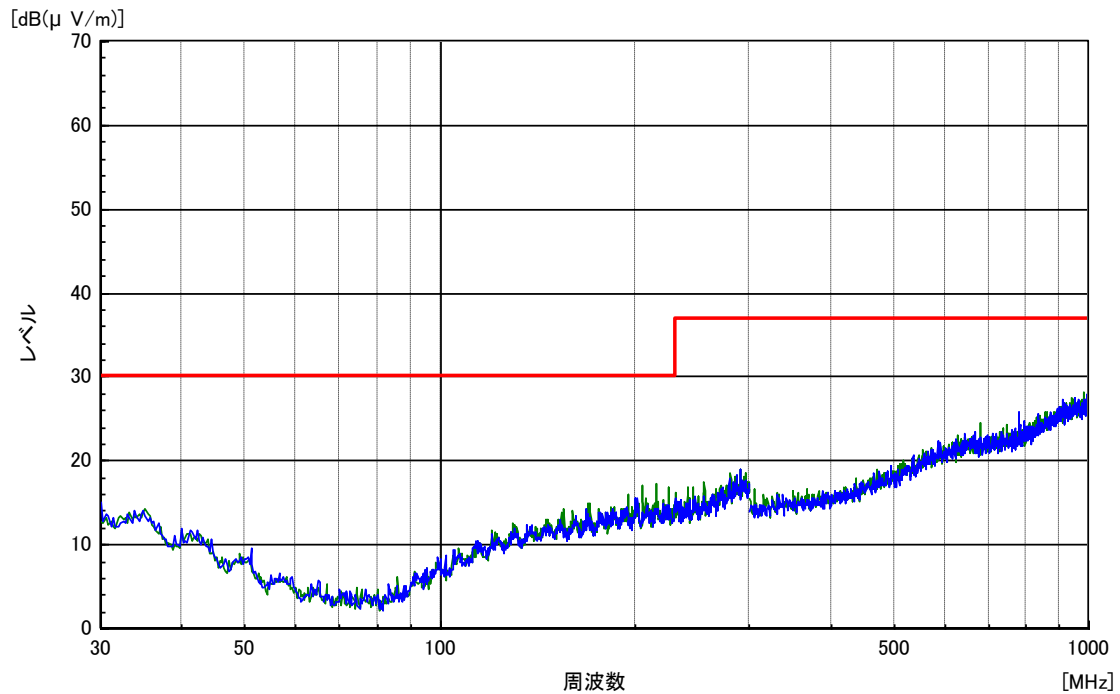
XC9281B18E0R-G Evaluation Board

HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

Test Result**(6) Load Transient Waveform @ Ta=25°C****(6-1) Vin = 3.6V, Iout = 1mA ⇔ 300mA****(6-2) Vin = 5V, Iout = 1mA ⇔ 300mA**

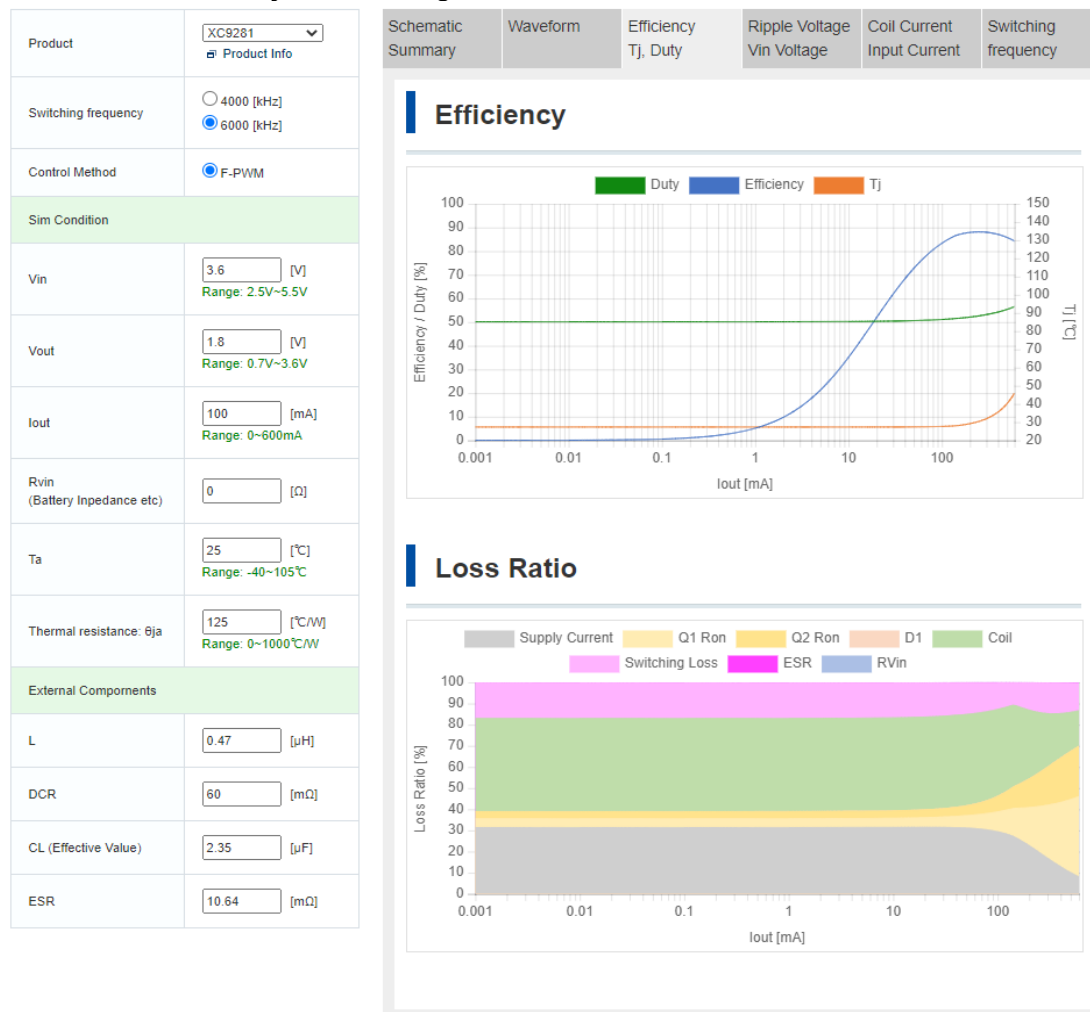
XC9281B18E0R-G Evaluation Board*HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters***Test Result****(7) Radiation EMI : VCCI 10m****Condition**

IC : XC9282B18ER-G
Vin : 3.7V
Vout : 1.8V
Iout : 100mA



XC9281B18E0R-G Evaluation Board*HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters***【Appendix】 How to calculate DC/DC Converter or DC/DC Controller.**

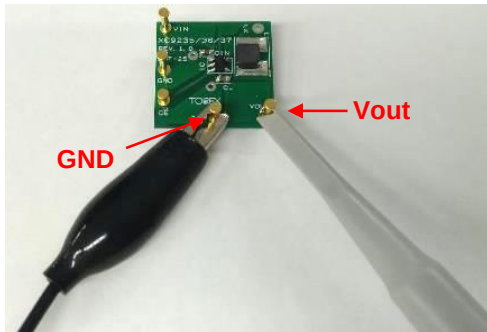
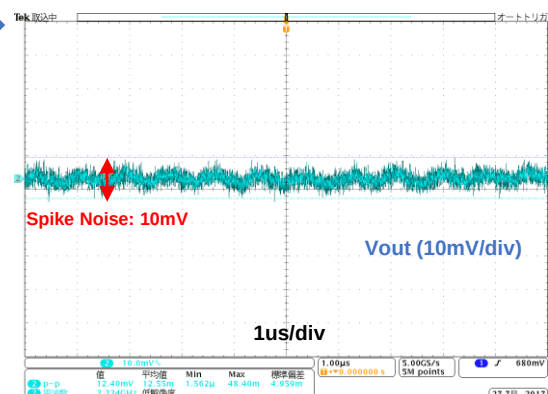
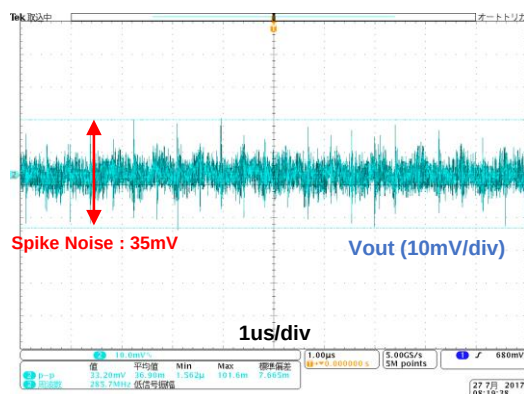
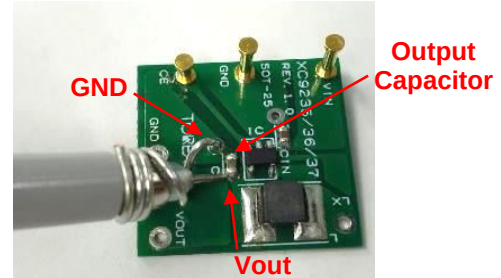
It can be calculated by the following "WEB DC/DC Simulation".



日本語 : <https://www.torex.co.jp/technical-support/dcdc-simulation/>
 English : <https://www.torexsemi.com/technical-support/dcdc-simulation/>
 简体中文 : <https://www.torex.com.cn/technical-support/dcdc-simulation/>

XC9281B18E0R-G Evaluation Board

HiSAT-COT Control, 0.6A Synchronous Step-Down DC/DC Converters

【Appendix】 How to reduce the spike noise caused by measurement (Probing method with oscilloscope)**Probing method : Before improvement****Probing method : After**

* Condition : XC9236, Vin=3.6V/Vout=1.8V/100mA

English : <https://www.torexsemi.com/technical-support/tips/reduction-spike-noise/>日本語 : <https://www.torex.co.jp/technical-support/tips/reduction-spike-noise/>