

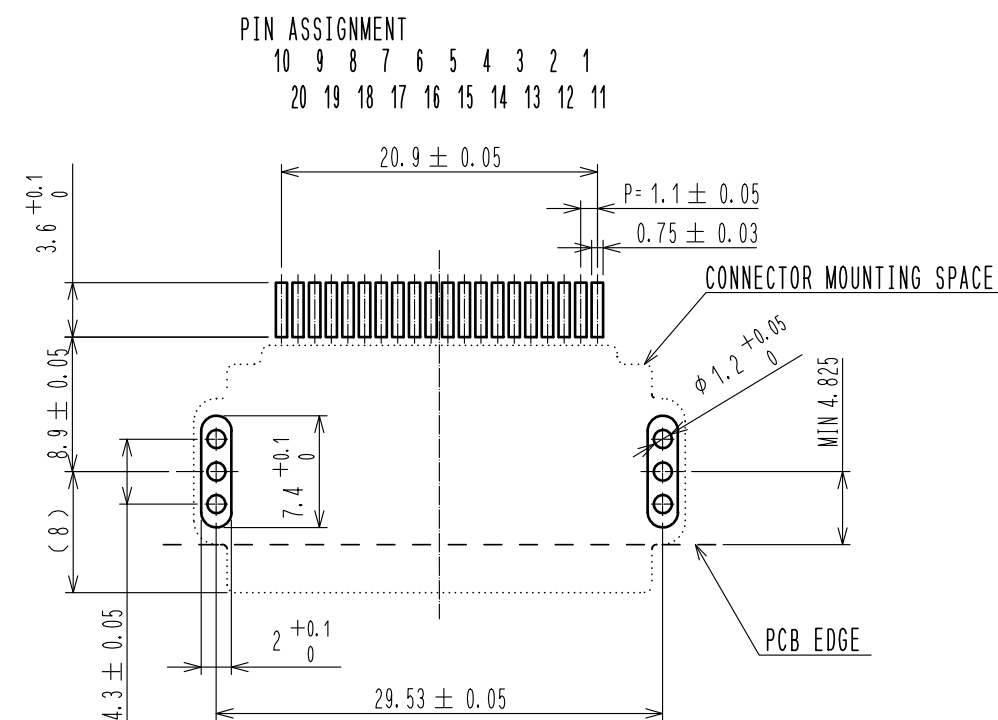
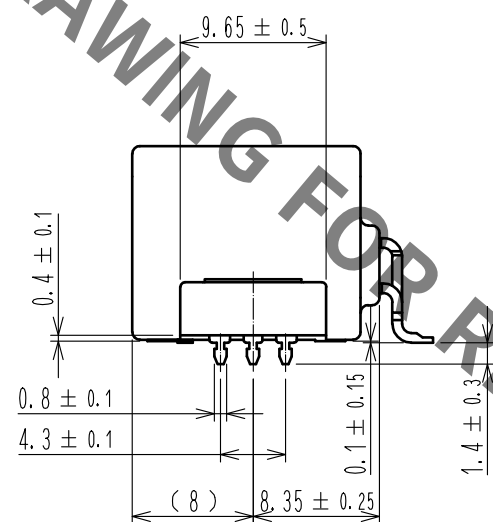
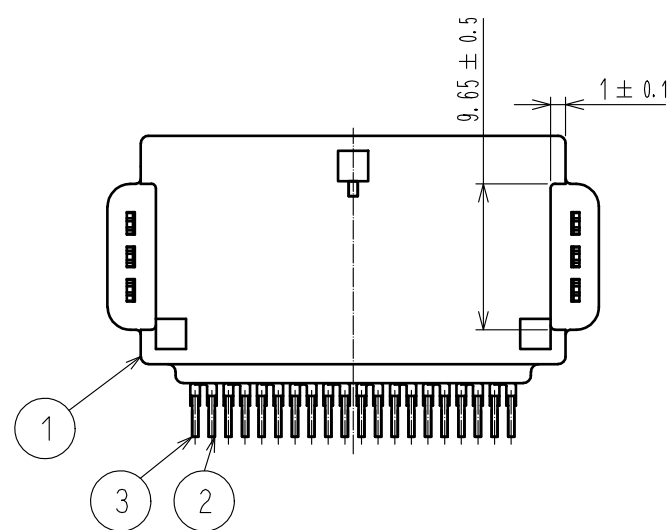


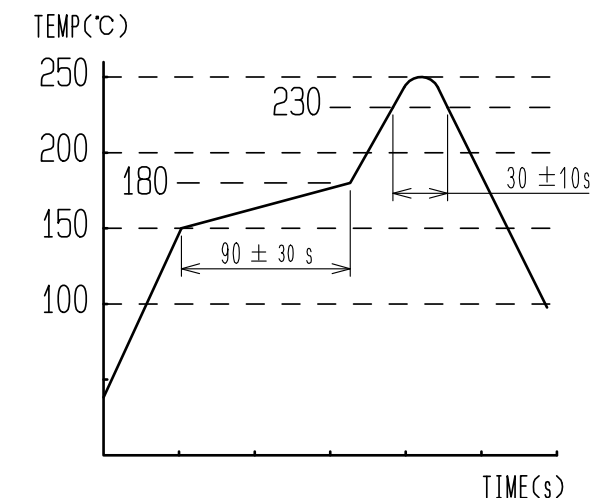


RECOMMENDED PCB PATTERN

5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.




3	BRASS	TIN PLATED T=0.64	6	PET					
2	BRASS	TIN PLATED T=0.64	5	PS					
1	PPS	BLACK	4	BRASS	TIN PLATED T=0.4				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED		AR. SHIRAI		16.09.09		DRAWING NO.	EDC-358751-99-00	
	CHECKED		HS. OZAWA		16.09.09			PART NO.	GT25H2-20DP-2. 2H<99>
	DESIGNED		TK. SHISHIKURA		16.09.09		CODE NO.		CL775-0080-0-99
	DRAWN		TK. SHISHIKURA		16.09.09				


PACKAGING SPECIFICATION

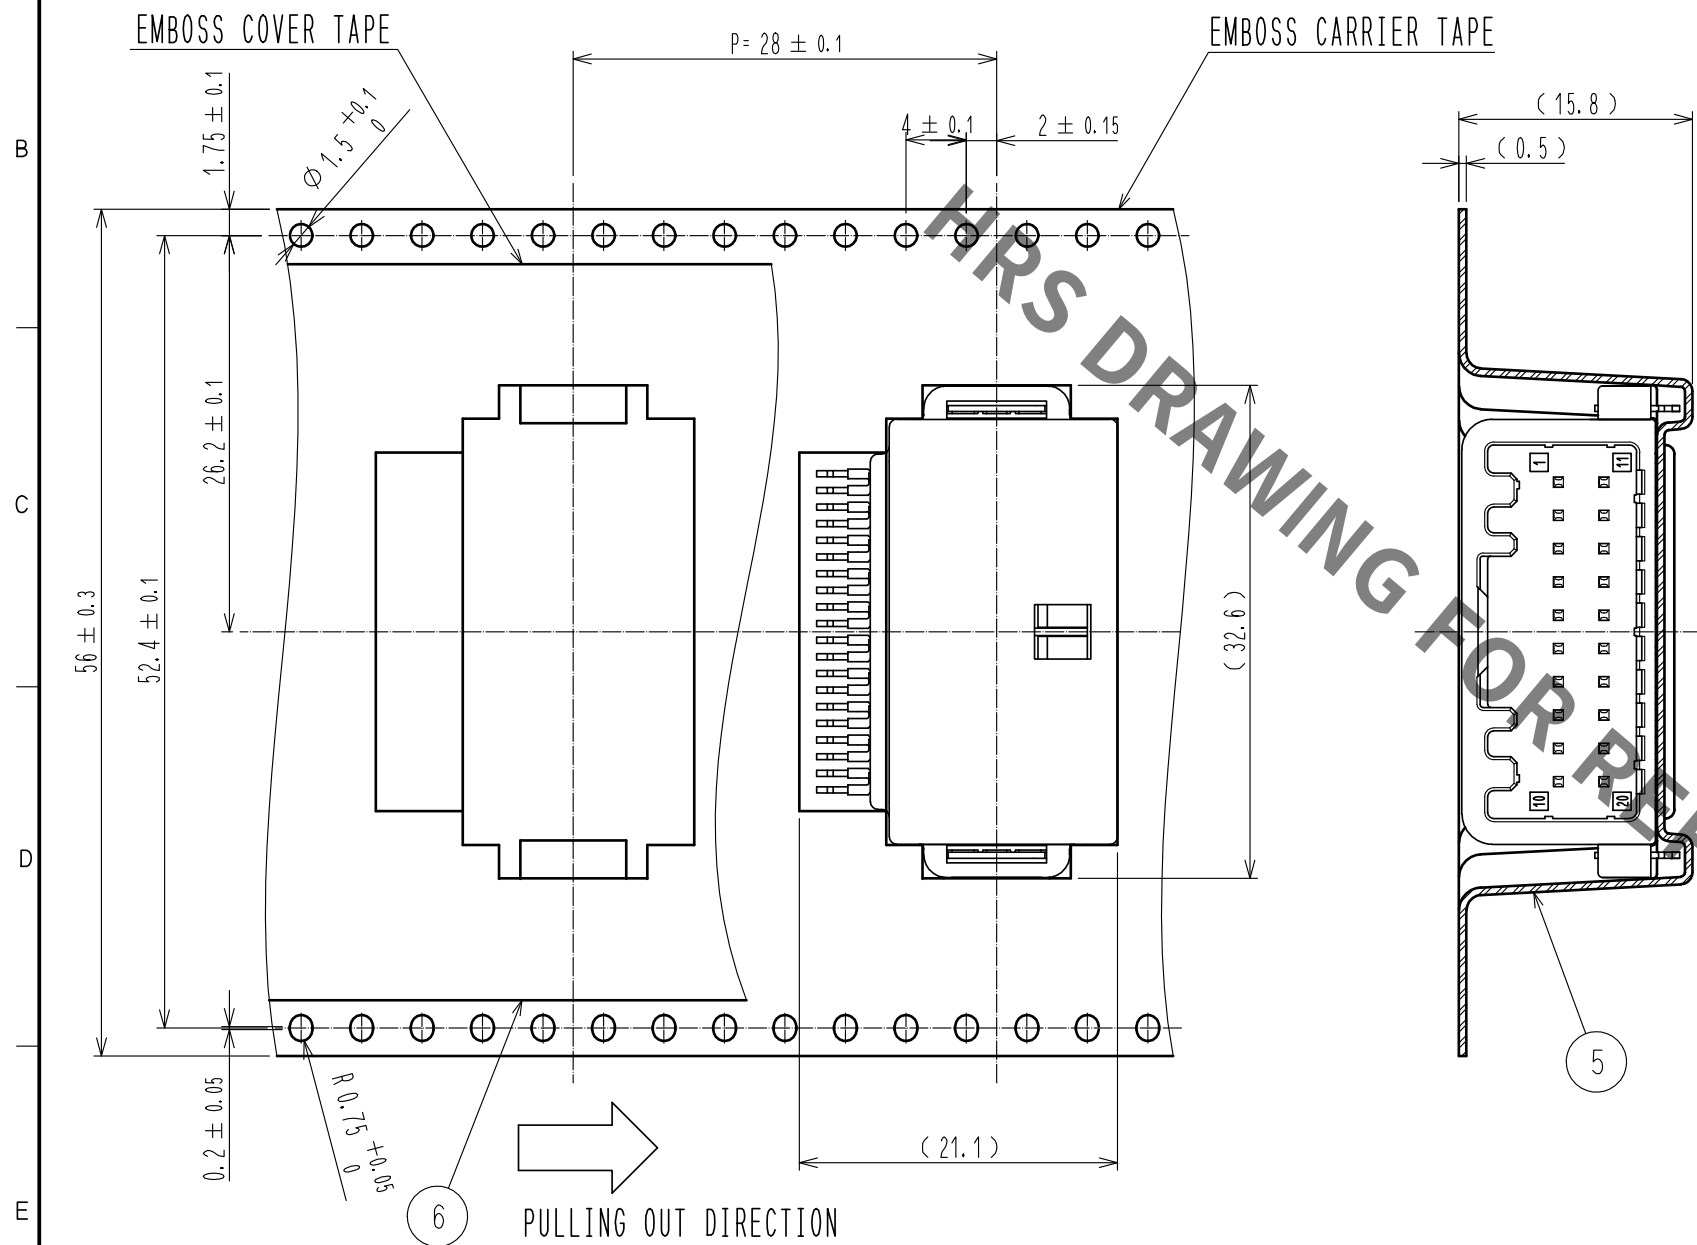

REEL DIMENSION(FREE)

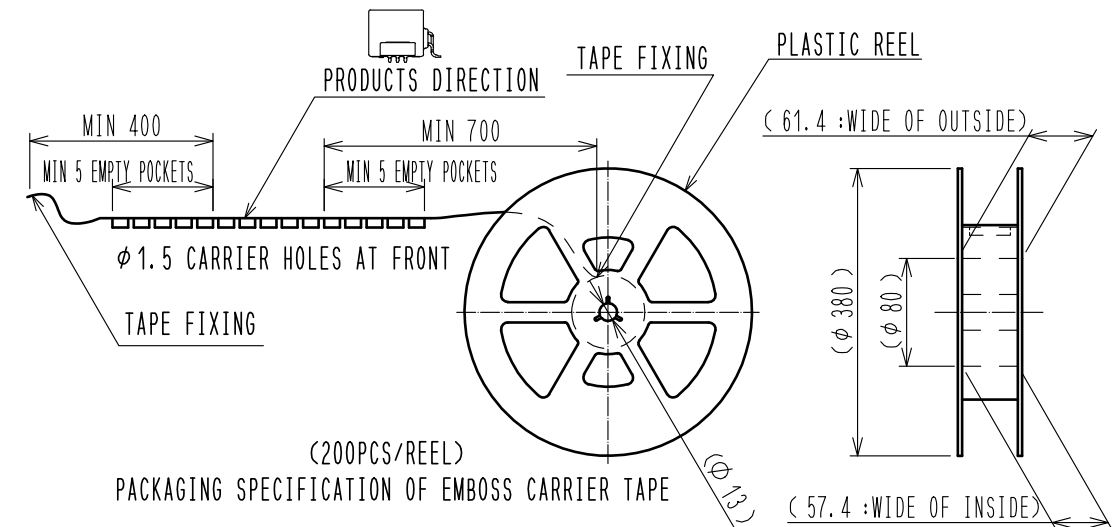

CARDBOARD DIMENSION(FREE)

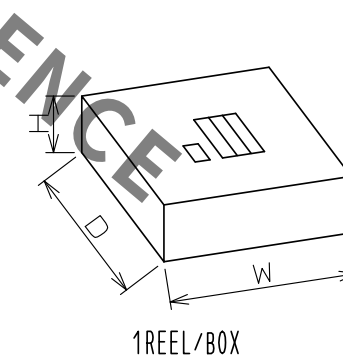

BOX SIZE

W = (405) (mm)

D = (405) (mm)

H = (63) (mm)

HRS

DRAWING NO.	EDC-358751-99-00
PART NO.	GT25H2-20DP-2.2H(99)
CODE NO.	CL775-0080-0-99