



EVBL2171-J-00A

5.5V, 1A, 2.6MHz, Synchronous, Step-Down Switch-Mode Converter Evaluation Board

DESCRIPTION

The EVBL2171-J-00A is an evaluation board designed to demonstrate the MP2171 and the MPQ2171. The evaluation board features an integrated MPS power inductor.

The MP2171 is a low-voltage, high-frequency, step-down switch-mode converter with integrated, internal power MOSFETs. It can achieve up to 1A of highly efficient output current (I_{OUT}) across a wide 2.5V to 5.5V input voltage (V_{IN}) range, with constant-on-time (COT) control for fast loop response.

The device is ideal for powering portable equipment that runs on a single-cell Lithium-ion (Li-ion) battery. Its output voltage (V_{OUT}) can be regulated to as low as 0.6V.

High power efficiency across the entire load range is achieved by scaling down the switching frequency (f_{SW}) at light loads. This reduces the switching loss during COT control.

Full protection features include cycle-by-cycle over-current protection (OCP), short-circuit protection (SCP) with hiccup mode, and thermal shutdown for reliable, fault-tolerant operation.

The MP2171 is available in a TSOT23-8 package.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	2.5 to 5.5	V
Output voltage	V_{OUT}	1.2	V
Output current	I_{OUT}	1	A

FEATURES

- Wide 2.5V to 5.5V Operating Input Voltage (V_{IN}) Range
- Up to 1A Output Current (I_{OUT})
- 40 μ A Quiescent Current (I_Q)
- 90m Ω and 50m Ω Internal Power MOSFETs
- 2.6MHz Default Switching Frequency (f_{SW}) with 3.3V Input and 1.8V Output
- Enable (EN) and Power Good (PG) for Power Sequencing
- Stable with Low ESR Ceramic Output Capacitors
- Internal Soft Start (SS)
- Cycle by Cycle Over-Current Protection (OCP)
- Shutdown Auto-Discharge
- Short-Circuit Protection (SCP) with Hiccup Mode
- Thermal Shutdown
- Available in a TSOT23-8 Package

 **Optimized Performance with MPS Inductor MPL-AL5030 Series**

APPLICATIONS

- Automotive Infotainment Systems
- Automotive Clusters
- Automotive Telematics
- Low-Voltage I/O Power Systems
- Handheld and Battery-Powered Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

EVBL2171-J-00A EVALUATION BOARD




LxWxH (6.35cmx6.35cmx1.2cm)

Board Number	MPS IC Number	MPS Inductor
EVBL2171-J-00A	MP2171GJ, MPQ2171GJ	MPL-AL5030-1R0

Efficiency vs. Load Current vs. Power Loss

$V_{IN} = 3.3V$

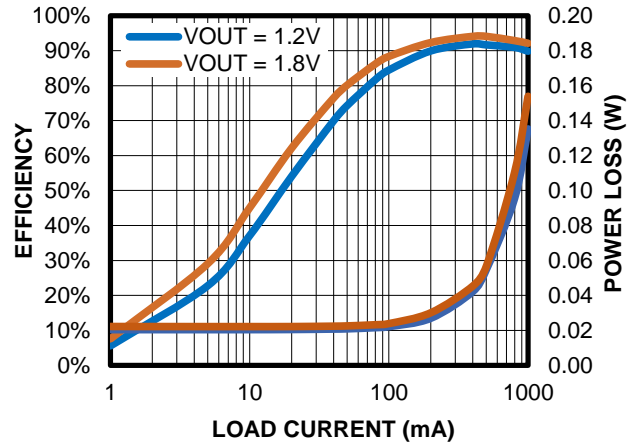

QUICK START GUIDE

1. Connect load terminals to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
2. Preset the power supply between 2.5V and 5.5V, then turn off the power supply. If longer cables (>0.5m total) are being used between the source and the evaluation board, install a damping capacitor at the input terminals.
3. Connect power supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
4. Turn on the power supply. The evaluation board should start up automatically.
5. To use the enable (EN) function, apply a digital input to the EN pin. Drive EN above 1.2V to turn the converter on; drive EN below 0.4V to turn it off.
6. The output voltage (V_{OUT}) is set via an external resistor divider (R1 + R2). Choose R1 to be about 41.2kΩ. Then R2 can be calculated with below Equation (1):

$$R2 = \frac{R1}{\frac{V_{OUT}}{0.6} - 1} \quad (1)$$

Figure 1 shows the feedback circuit.

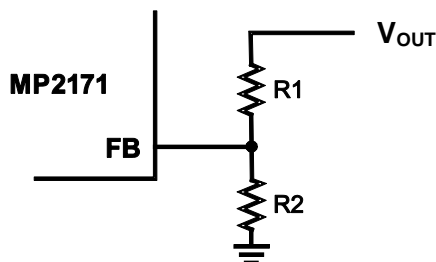


Figure 1: Feedback Circuit

Table 1 lists the recommended feedback resistor values for common output voltages.

Table 1: Recommended Resistor Values for Common Output Voltages

V _{OUT} (V)	R1 (kΩ)	R2 (kΩ)
1	41.2 (1%)	60.4 (1%)
1.2	41.2 (1%)	41.2 (1%)
1.8	41.2 (1%)	20.5 (1%)
3.3	41.2 (1%)	9.09 (1%)

EVALUATION BOARD SCHEMATIC


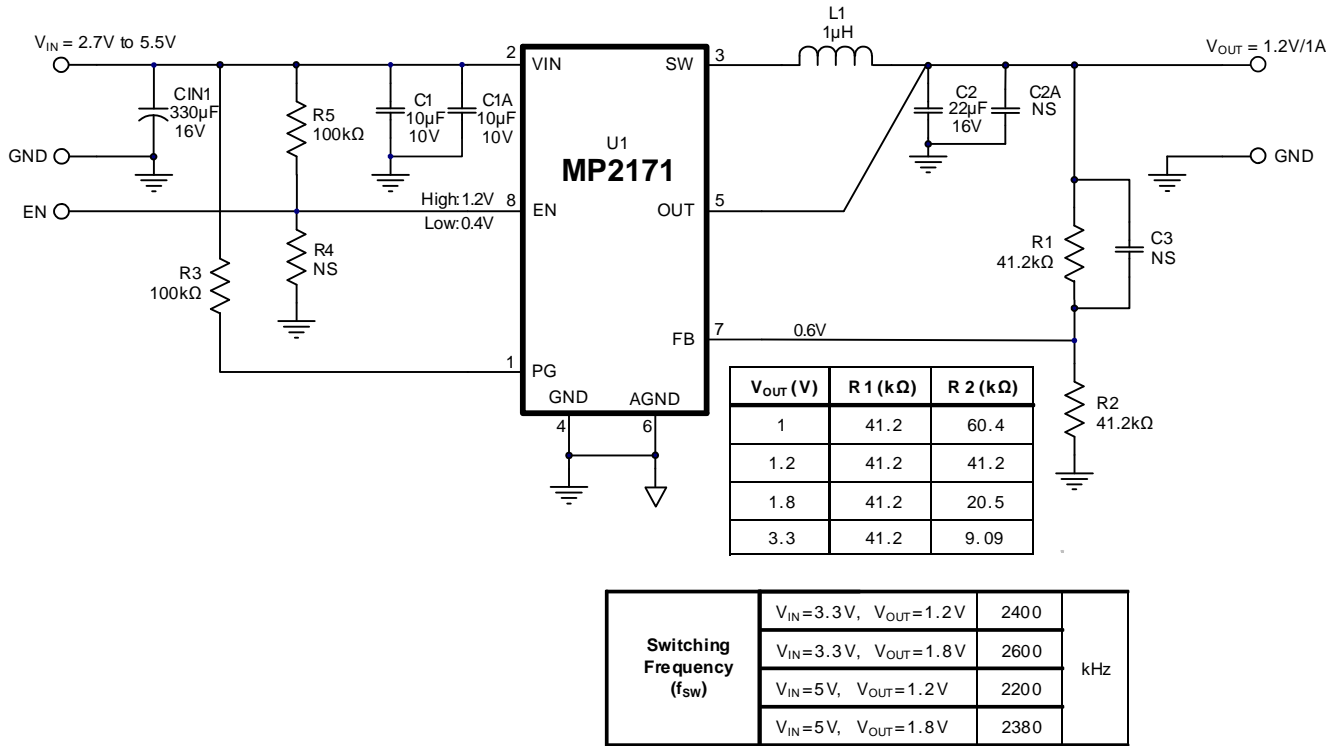


Figure 2: Evaluation Board Schematic

PACKAGE REFERENCE

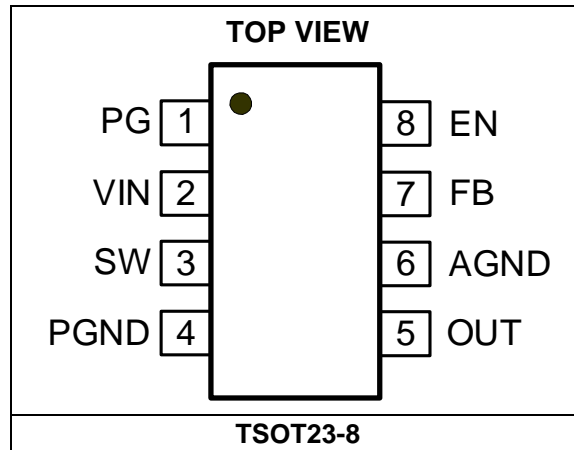

EVBL2171-J-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	L1	MPL-AL5030-1R0	Inductor, 1 μ H, 12A, 7m Ω	SMD	MPS	MPL-AL5030-1R0
1	CIN1	330 μ F	Conductive aluminum-polymer solid capacitor, 10V, 330 μ F, 17m Ω	SMD	Panasonic	10SVP330M
2	C2A, C3	NS				
2	C1, C1A	10 μ F	Ceramic capacitor, 10V, 20%, X5R	1206	Taiyo Yuden	LMK212BJ106MG-T
1	C2	22 μ F	Ceramic capacitor, 6.3V, 10%, X5R	1206	Murata	GRM218R70J226KE76L
2	R1, R2	41.2k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0741K2L
2	R3, R5	100k Ω	Film resistor, 1%	0603	Yageo	RC0603FR-074100KL
1	R4	NS				
1	U1	MP2171	Synchronous, step-down converter, 5.5V, 1A	TSOT23-8	MPS	MP2171GJ
4	VIN, GND, VOUT, GND	2mm	2mm golden pin, test point	DIP	Custom ⁽¹⁾	
9	EN, GND, PG, VINSENSE, GND, VOUTSENSE, GND, SW, GND	1mm	1mm golden pin, test point	DIP	Custom ⁽¹⁾	

Note:


1) These pins are custom-made by MPS. For more information, contact an MPS FAE.

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 1.2V$, $L = 1\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Load Current vs. Power Loss

$V_{IN} = 3.3V$

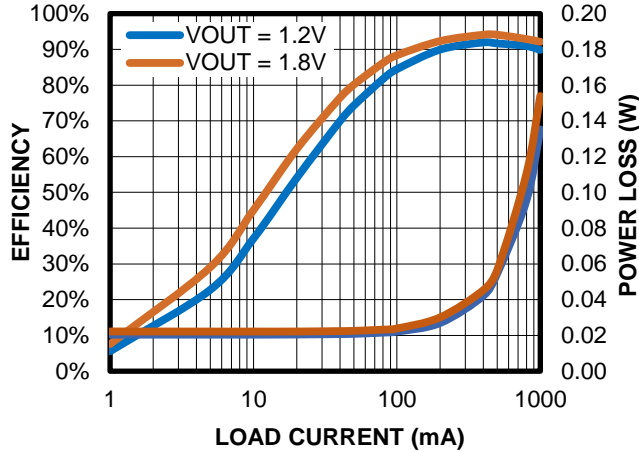


Efficiency vs. Load Current vs. Power Loss


$V_{IN} = 5V$

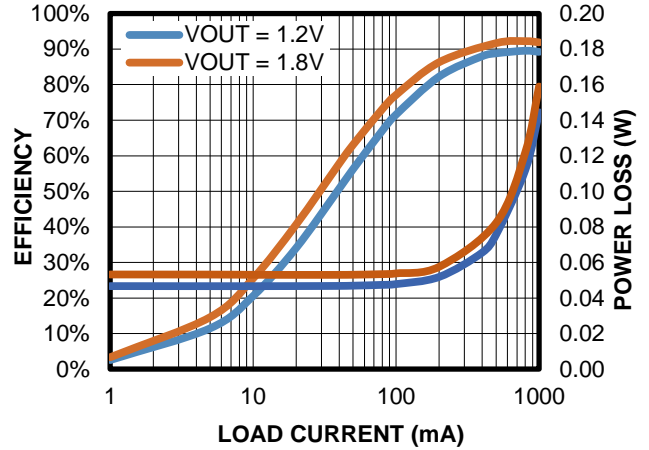

Load Regulation

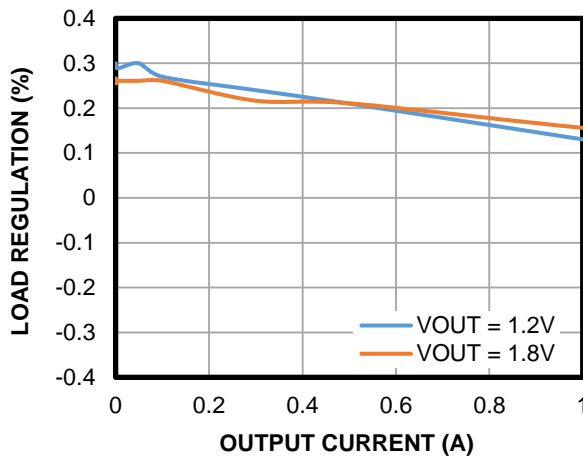


Line Regulation

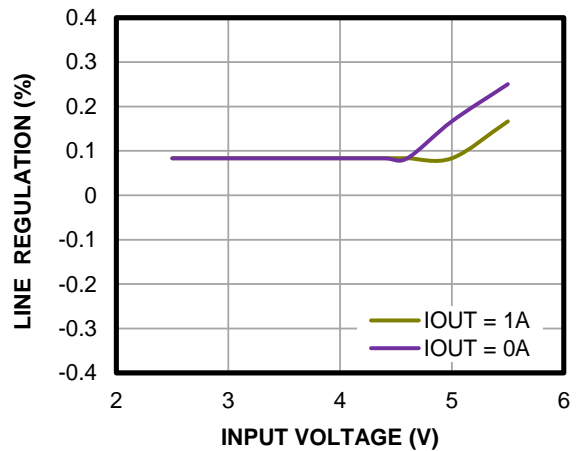

Case Temperature Rise

$V_{IN} = 3.3V$

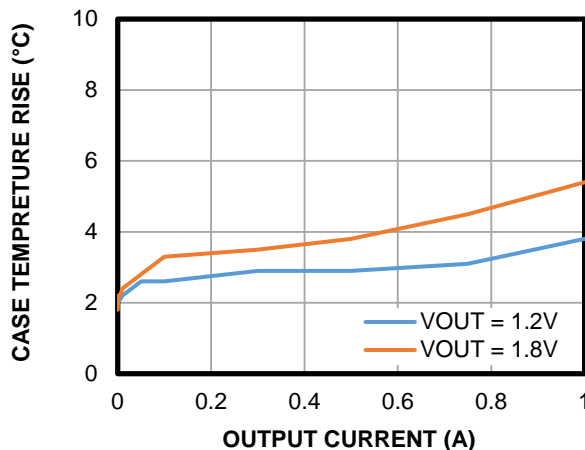


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 1.2V$, $L = 1\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise noted.


Output Ripple

$I_{OUT} = 0A$

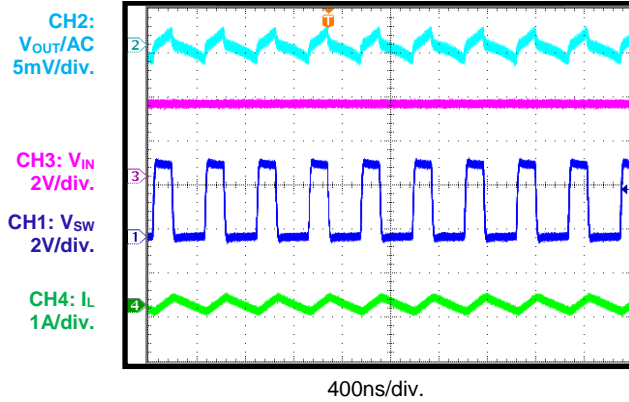


Output Ripple

$I_{OUT} = 1A$

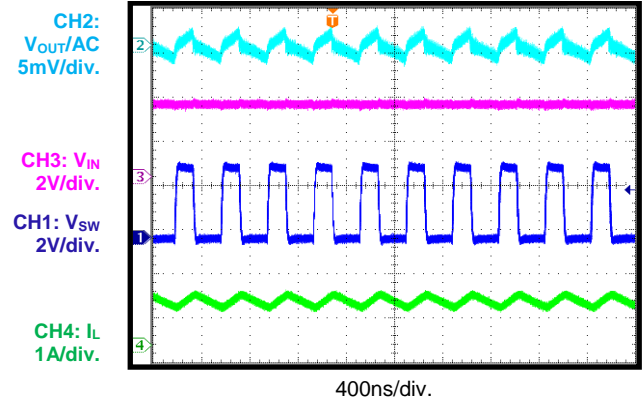


Start-Up through VIN

$I_{OUT} = 0A$

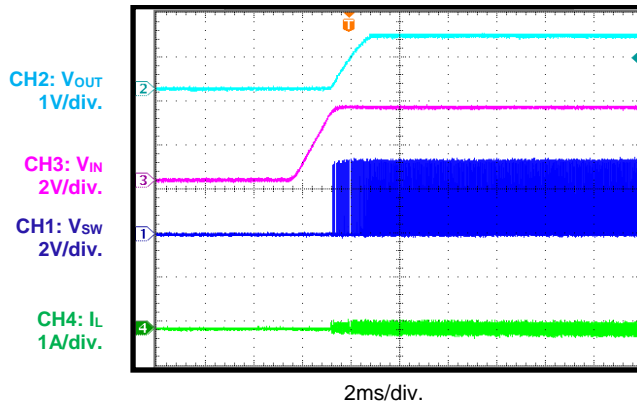


Start-Up through VIN

$I_{OUT} = 1A$

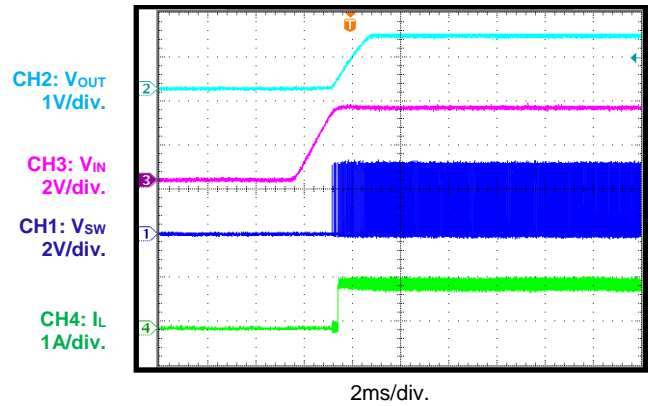


Shutdown through VIN

$I_{OUT} = 0A$

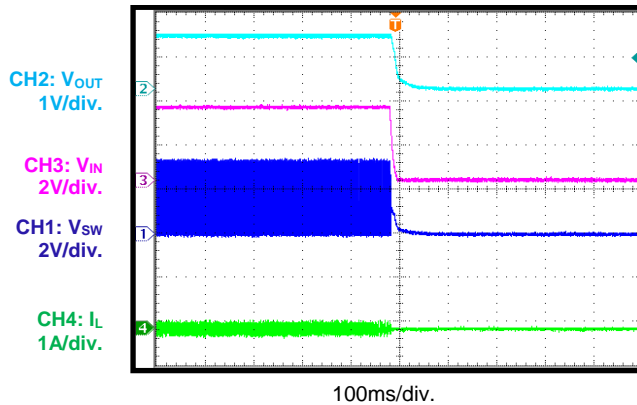

Shutdown through VIN

$I_{OUT} = 1A$

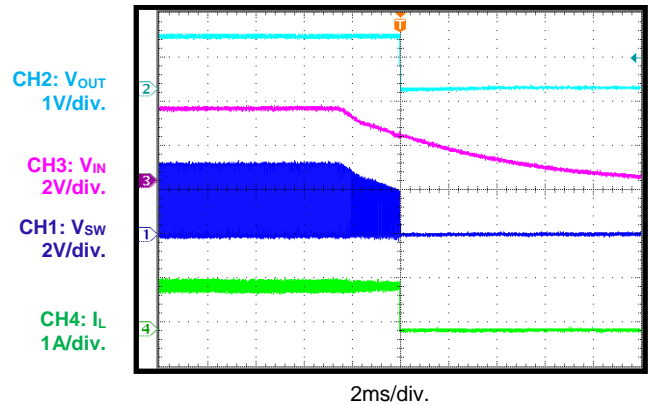


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 1.2V$, $L = 1\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise noted.


Start-Up through EN

$I_{OUT} = 0A$

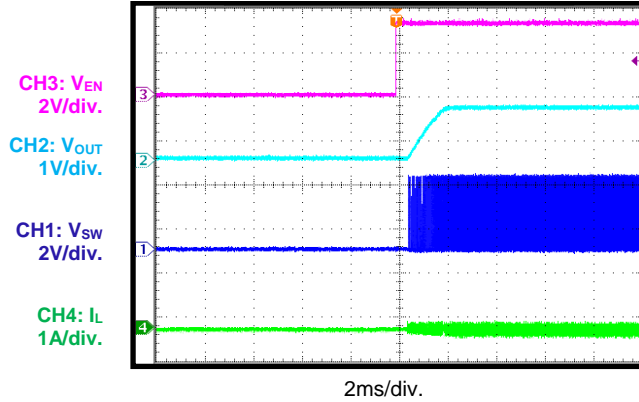


Start-Up through EN

$I_{OUT} = 1A$

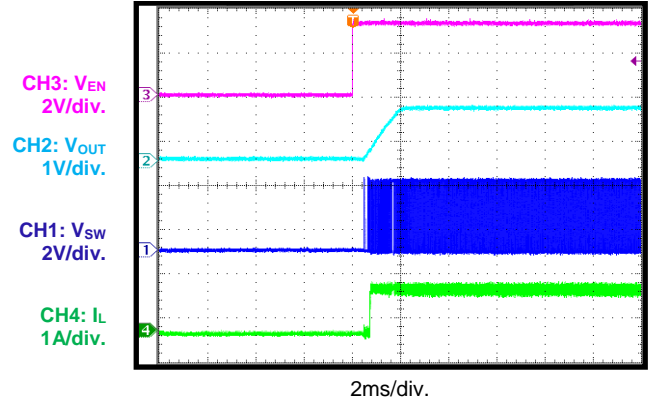


Shutdown through EN

$I_{OUT} = 0A$

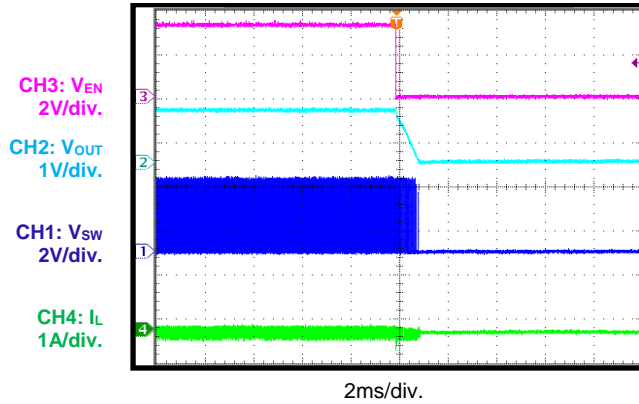


Shutdown through EN

$I_{OUT} = 1A$

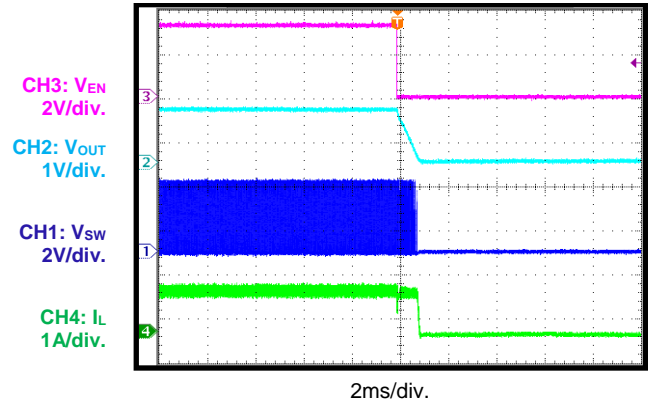


PG Start-Up through VIN

$I_{OUT} = 1A$

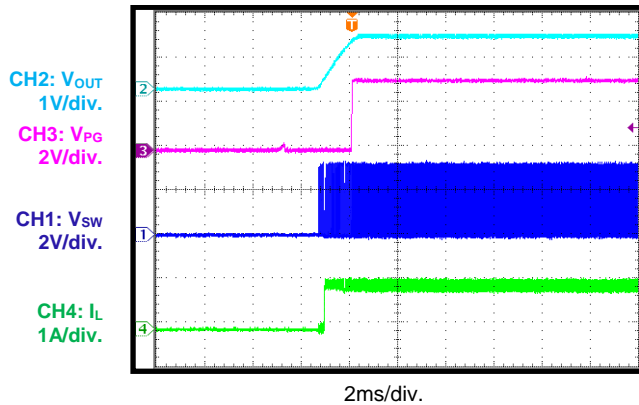

PG Shutdown through VIN

$I_{OUT} = 1A$

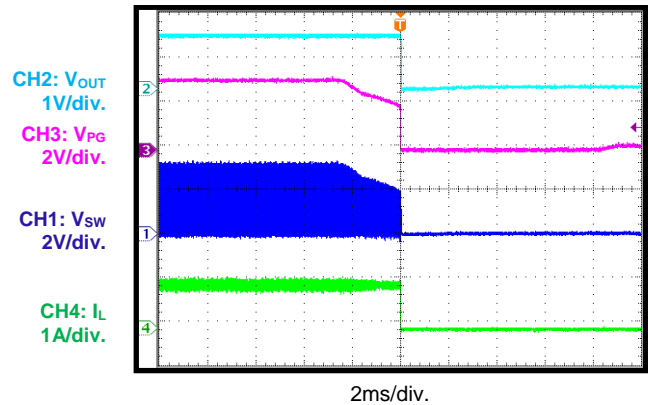


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 1.2V$, $L = 1\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise noted.


PG Start-Up through EN

$I_{OUT} = 1A$

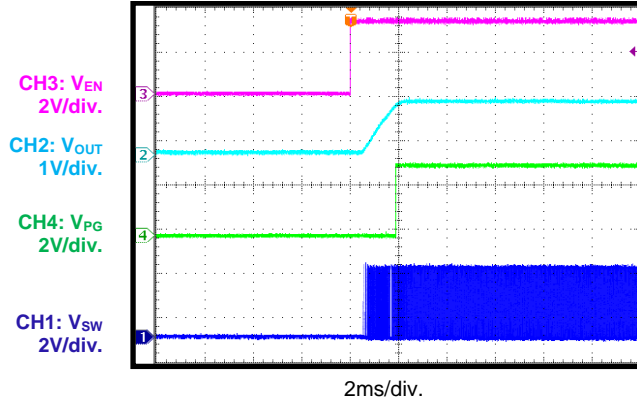


PG Shutdown through EN

$I_{OUT} = 1A$

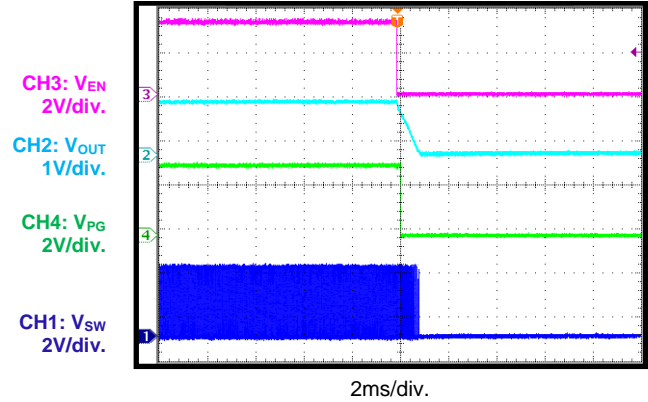


SCP Entry

$I_{OUT} = 0A$

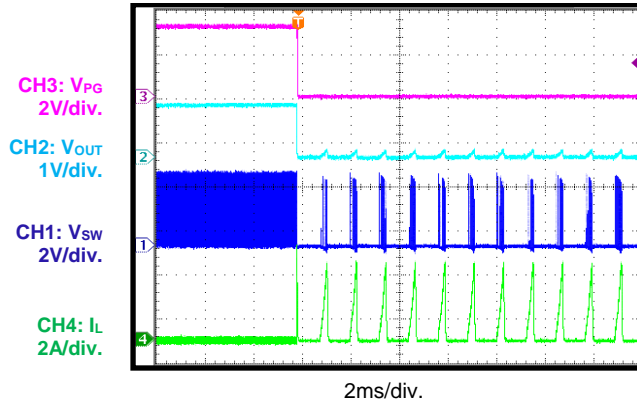


SCP Entry

$I_{OUT} = 1A$

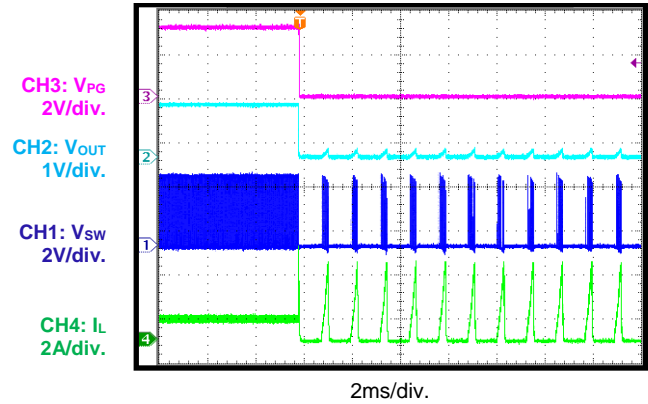


SCP Recovery

$I_{OUT} = 0A$

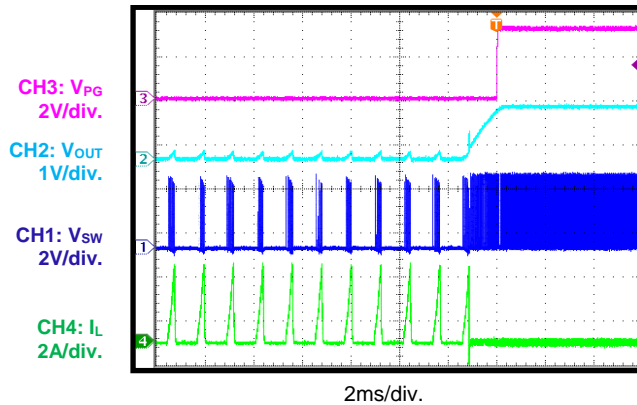

SCP Recovery


$I_{OUT} = 1A$

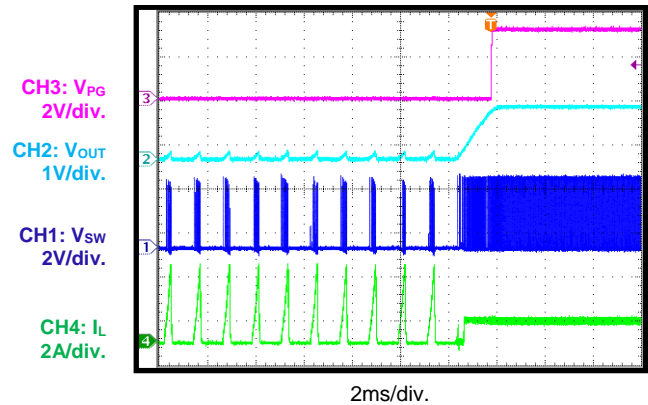

EVB TEST RESULTS (continued)


Performance waveforms are tested on the evaluation board. $V_{IN} = 3.3V$, $V_{OUT} = 1.2V$, $L = 1\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise noted.

SCP Steady State

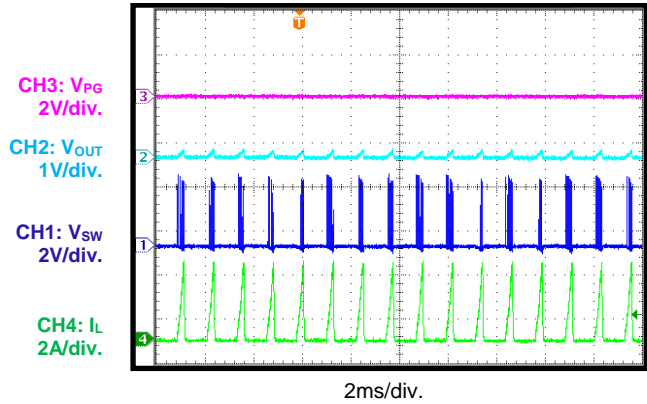

Load Transient

$I_{OUT} = 0A$ to $1A$

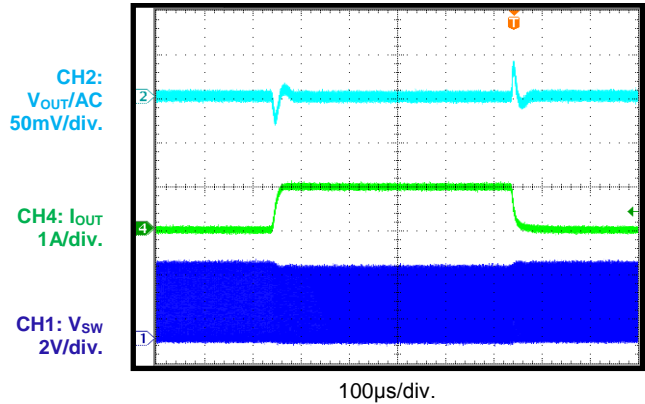

PCB LAYOUT

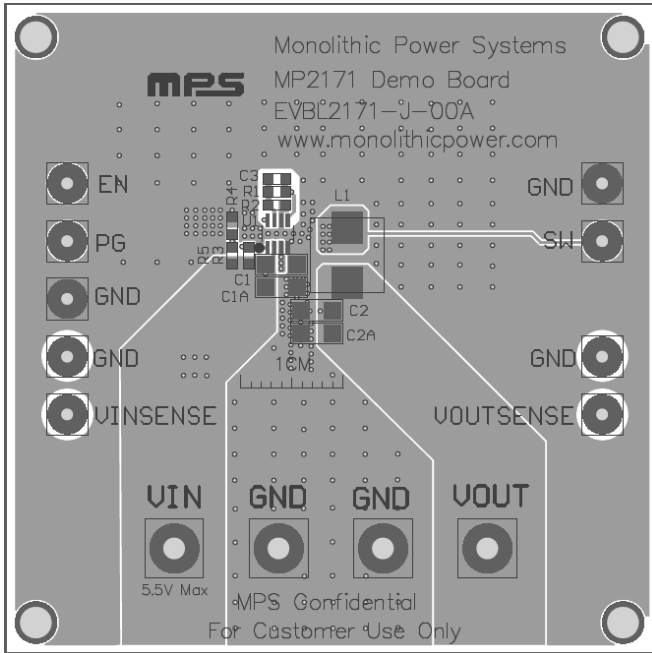


Figure 3: Top Silk and Top Layer

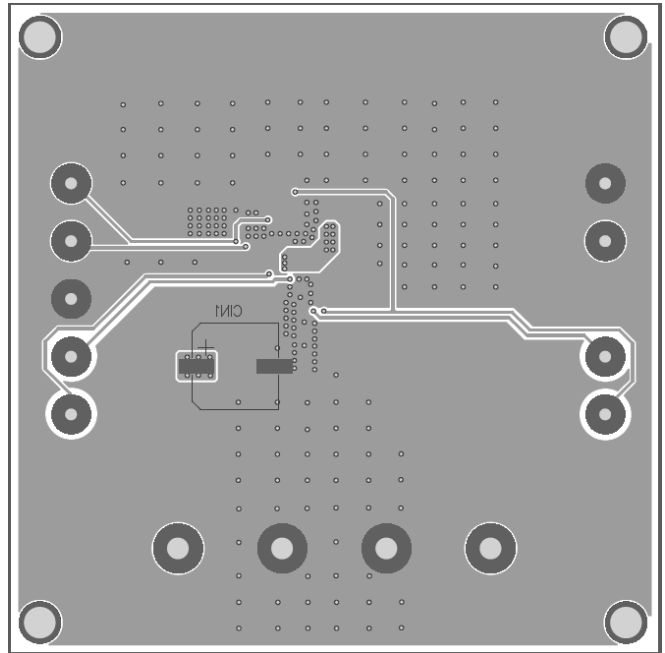


Figure 4: Bottom Layer and Bottom Silk

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	10/16/2019	Initial Release	-
1.1	9/28/2021	Updated the Quick Start Guide section	3
		Updated the EVBL2171-J-00A Bill of Materials section	5
		Grammar and formatting updates; updated headers and footers; updated figure titles; updated pagination	All

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.