
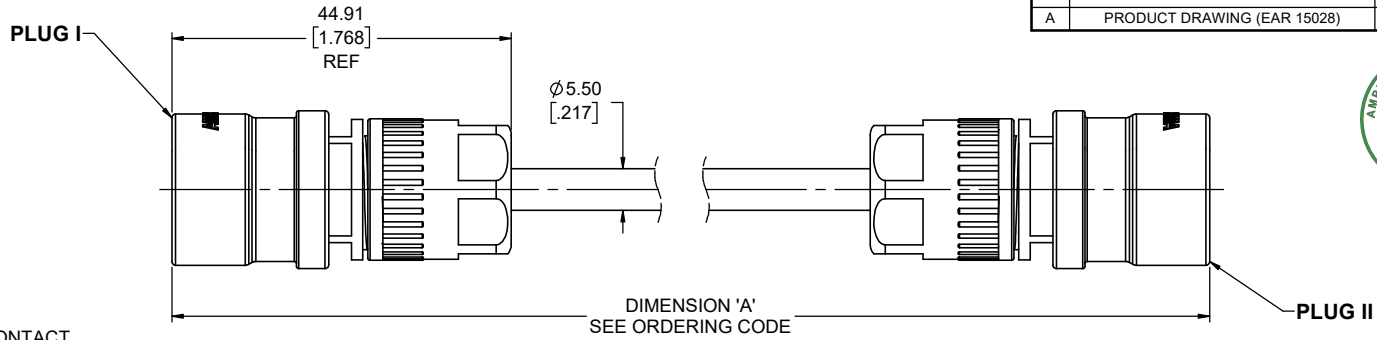


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PRODUCT DRAWING (EAR 15028)	JAN28/22	K.L.

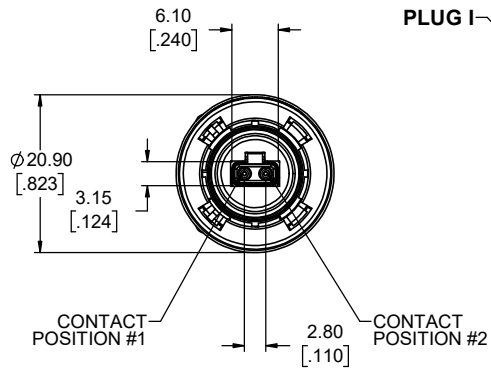


CONTACT POSITION (PLUG I)	SIGNAL PER IEC 63171-6	CONTACT POSITION (PLUG II)
1	BI_DA+	1
2	BI_DA-	2

ORDERING CODE: **MSPE - C 6 P 2 - B XX 10**

RUGGED MSPE SERIES
CABLE ASSEMBLY
IP67 RATING
PUSH/PULL, LATCH DESIGN
PLUG ON BOTH ENDS
STANDARD, 24AWG CABLE


CABLE LENGTHS (DIMENSION 'A')	
20 TO 99	LENGTH IN CM
A0 TO A9	1 METER + 0 TO 9 DECIMETERS
B0 TO B9	2 METERS + 0 TO 9 DECIMETERS
C0 TO C9	3 METERS + 0 TO 9 DECIMETERS
D0 TO D9	4 METERS + 0 TO 9 DECIMETERS
E0 TO E9	5 METERS + 0 TO 9 DECIMETERS
F0 TO F9	6 METERS + 0 TO 9 DECIMETERS
G0 TO G9	7 METERS + 0 TO 9 DECIMETERS
H0 TO H9	8 METERS + 0 TO 9 DECIMETERS
J0 TO J9	9 METERS + 0 TO 9 DECIMETERS
K0 TO K9	10 METERS + 0 TO 9 METERS
L0 TO L9	20 METERS + 0 TO 9 METERS
M0 TO M9	30 METERS + 0 TO 9 DECAMETERS

CABLE LENGTH ORDERING CODE EXAMPLES:
75cm = 75 6.3m = F3 25m = L5 80m = M5

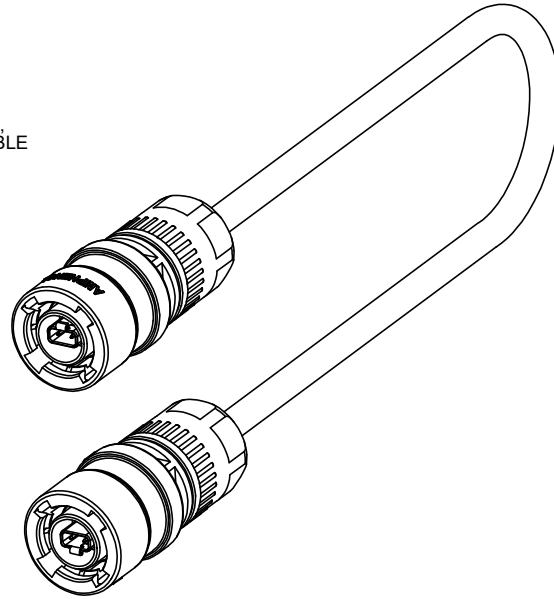

NOTES:

- MATERIALS: ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS.
 - HOUSING, CAP, GLAND, & INSERTS: ENGINEERING THERMOPLASTIC, UL94V-0 FLAMMABILITY RATING, COLOUR: BLACK
 - EMI SHIELD: STAINLESS STEEL PLATED WITH NICKEL
 - CONTACTS: COPPER ALLOY PLATED WITH NICKEL OVERALL, 0.76µm (30µ") GOLD ON THE MATING AREA AND GOLD FLASH ON THE TAILS
 - O-RING & GROMMET: SILICONE RUBBER, COLOUR: BLACK
 - RETAINING RING & WAVE SPRING: STAINLESS STEEL, PASSIVATED
 - CABLE: STRANDED 24 AWG COPPER, PE INSULATION, FOIL WRAPPED TWISTED PAIR, OVERALL BRAID, PUR JACKET
- DESIGNED IN ACCORDANCE WITH IEC STANDARDS 63171-6 & 61076-2-010. COMPATIBLE WITH:
 - IEEE 802.3cg, 10BASE-T1L & -T1S
 - IEEE 802.3bw, 100BASE-T1
 - IEEE 802.3bp, 1000BASE-T1
 - IEEE 802.3bu, POWER OVER DATA LINES (PoDL)
- ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMPERATURE: -40°C TO +85°C
 - IP67 RATED PERFORMANCE PER IEC 60529, IN MATED CONDITION.
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 4A
 - VOLTAGE RATING: 60VDC
 - CONTACT RESISTANCE: 20mΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE:
 - 1000VDC CONTACT TO CONTACT
 - 2250VDC CONTACT TO SHIELD
- FOR MATING RECEPTACLE INFORMATION PLEASE REFER TO SALES DRAWINGS P-MSPE-J6P2-M02, P-MSPE-J6P2-E00 OR P-MSPE-J6P2-B02

UNLESS SPECIFIED OTHERWISE		DRAWN	P. GOBUI		JAN19/22		<div>Amphenol Canada Corp.</div> <div>Commercial Products</div> <div>MSPE SERIES SINGLE PAIR ETHERNET CABLE ASSEMBLY, IP67 PLUG ON BOTH ENDS, PUSH/PULL, 24 AWG CABLE, VARIOUS LENGTHS, RoHS COMPLIANT</div> <div>P-MSPE-C6P2-BXX10</div> <div>CODE ID NO. 03554 DWG SIZE: X SCALE: 2:1 SHEET 1 OF 1</div>				
PRIMARY UNITS MILLIMETRES		CHECKED	K. LAMBIE		JAN28/22						
SECONDARY UNITS INCHES		M.E.		APP'D							
REFERENCE IN PARENTHESES		Q.A.		APP'D							
GENERAL TOLERANCES		DWG. APPR.						DWG. NO.		REV	
1 DECIMAL PLACE		ENG. REL. NO.		EAR 15028						A	
2 DECIMAL PLACES		REF.									
3 DECIMAL PLACES		THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING					
ANGULAR DEGREES											