

Bench Top Remote Programmable Linear Mode Power Supplies

multicomp PRO



MP710077 & MP710077 US



MP710078 & MP710078 US

Description

These are of low power, low current, high precision laboratory grade analogue supply merges with the advanced MCU control and PC interface via USB and optional Ethernet is ideal for working & testing with digital electronics, mobile devices and other low power devices.

It is ideal for noise-sensitive applications, like communication, audio visual and measuring devices.

Feature

- 1 × Variable output, 2 × Isolated fixed outputs
- 115V AC or 230V AC Selectable input
- Remote Programmable via USB or LAN (with optional LAN Card)
- On housing 10 Steps Waveform generators with cycle periods running
- 3 users defined V and I panel presets for frequent use
- Resolution 10mV and 1mA with 4 digits displays
- Smart cooling fan speed control from zero to full speed Lap*
- Standard Commands of Programmable Instruments (SCPI) command syntax

Note:

*This term defines the cooling method available in the power supply. The cooling fan has a control from 0 to full speed (example: If the rpm of the fan is 10000, then 0 to 10000 rpm control is possible in the power supply)

Specifications

Part Number	MP710077 & MP710077 US	MP710078 & MP710078 US
Variable Output Voltage	0.1V DC to 18V DC	0.1V DC to 32V DC
Variable Output Current	0 to 6A	0 to 3.5A
Voltage Regulation		
Load (10-90% Rated Current)		≤10mV
Line (±10% Variation)		≤5mV

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO

Bench Top Remote Programmable Linear Mode Power Supplies

multicomp PRO

Part Number	MP710077& MP710077 US	MP710078 & MP710078 US
Current Regulation		
Load (10-90% Rated Voltage)	≤ 3mA	
Line (±10% Variation)	≤ 2mA	
Ripple & Noise (r.m.s)	≤ 5mV	
Auxiliary Fix Output		
Aux. 1 output	5mV DC/3.3V DC (Selectable), 0.8A	
Aux. 2 output	12V DC, 0.8A	
Tracking Over Voltage Protection	O/P ≤ 5V : Set voltage +1V O/P > 5V : Set voltage x 120%	
Voltage Setting Resolution	10mV	
Current Setting Resolution	1mA	
Meter Type and Accuracy		
Voltage Meter	4 Digit LED Display (±0.5% +5 digits, <10) (±0.5% +2 digits ≥10V)	
Current Meter	4 Digit LED Display (±0.5% +5 digits, <0.5A) (±0.2% +2 digits >0.5A)	
Cooling Method	Thermostatic Control Fan (0 to full speed)	
Protections	Overload, Short Circuit by Constant Current, Output Tracking Over Voltage, Over Temperature	
Special Feature	3 User defined V and I preset, Remote V, I, and output on-off	
Presets Cycle Programming	10 steps waveform generator Max. preset cycle 999	
Commend Set	SCPI	
Communication Types	USB (bundle); Ethernet (Optional)	
Approvals	CE EMC: EN 55011, 55022 LVD: EN 60950, 61010	
Input Voltage	115V AC / 230V AC, 60Hz / 50Hz	
Full Load Input Current	≤ 1.1A @ 230V AC	
Dimensions (W×H×D)	151mm×132mm×260mm	
Weight	~5.1kgs	

All values are based on the Standard ambient Temperature 25°C and Pressure 0.1Mpa.

Accessories

AC Power Cord (UK / EU) or (US), Test Lead Set, USB Cable and Quick Start Guide

Standard Warranty

12 Months

Note:

AEN-8102 Ethernet Card is not included as standard Accessory.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro


multicomp PRO

Bench Top Remote Programmable Linear Mode Power Supplies




Indications

Front Panel

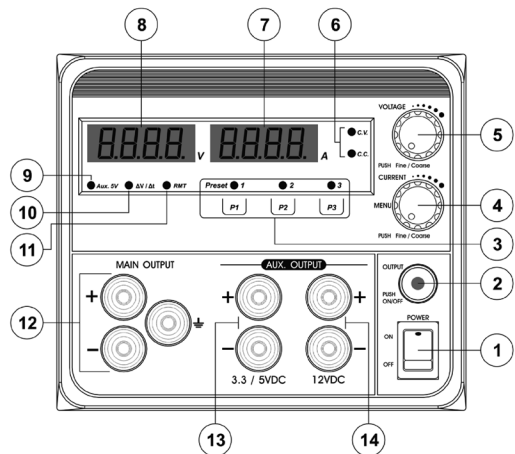

1. Main Power Switch
2. Output ON/OFF button
3. Preset 1/ 2/ 3 selection and LED indication
4. Main output Current limit adjust knob and Menu entry
5. Main output Voltage limit adjust knob
6. C.V./C.C. mode indication
7. Ammeter
8. Voltmeter
9. Auxiliary Output 5V indicator
10. Wave Form generation cycle running indicator
11. Remote control indicator
12. Adjustable Main Output
13. Auxiliary output 1 for 3.3V/ 5V
14. Auxiliary output 2 for 12V

Back Panel

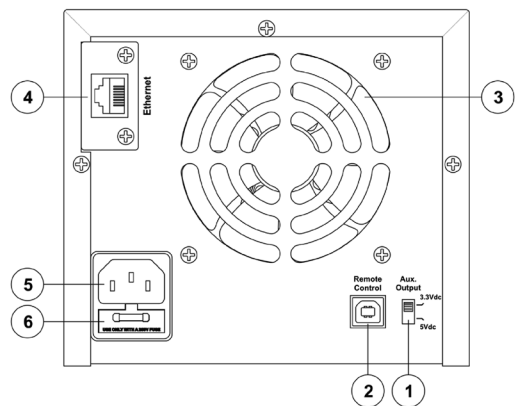

1. Auxiliary 1 3.3V/ 5V selection
2. USB Remote Control port
3. Cooling Fan
4. Ethernet port (Ethernet model only)
5. AC power plug
6. AC FUSE

Part Number Table

Description	Part Number
Programmable Linear Mode Power Supply, 100mV DC to 18V DC, 6A, UK / EU	MP710077
Programmable Linear Mode Power Supply, 100mV DC to 32V DC, 3.5A, UK / EU	MP710078
Programmable Linear Mode Power Supply, 100mV DC to 18V DC, 6A, US	MP710077 US
Programmable Linear Mode Power Supply, 100mV DC to 32V DC, 3.5A, US	MP710078 US

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

