

SIEMENS

Ingenuity for life



LV10 04/2021 EN

Wyłączniki
nadmiarowoprądowe

Edycja
04/2021

Katalog

siemens.pl

Making sure power makes its way

Consistent, safe and intelligent low-voltage power distribution and electrical installation technology

Whether industries, infrastructures or buildings: Each environment depends on a reliable power supply.

Which is why products and systems featuring maximum safety and optimum efficiency are in demand. This comprehensive portfolio for low-voltage power distribution and electrical installation technology covers every requirement – from the switchboard to the socket outlet.

We are there when you need us

Your personal contact can be found at
www.siemens.com/lowvoltage/contact

Catalog LV 10 · 04/2021

You will find the latest edition and all future editions in the Siemens Industry Online Support at
www.siemens.com/lowvoltage/catalogs

Refer to the Industry Mall for current prices
www.siemens.com/industrymall

The products and systems listed in this catalog are developed and manufactured using a certified quality management system in accordance with DIN EN ISO 9001:2008.

Technical data

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

© Siemens 2021

Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	I/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	Residual Current Protective Devices / Arc Fault Detection Devices (AFDDs)	4/1
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

I

1

2

3

4

5

6

7

8

9

10

11

12

13

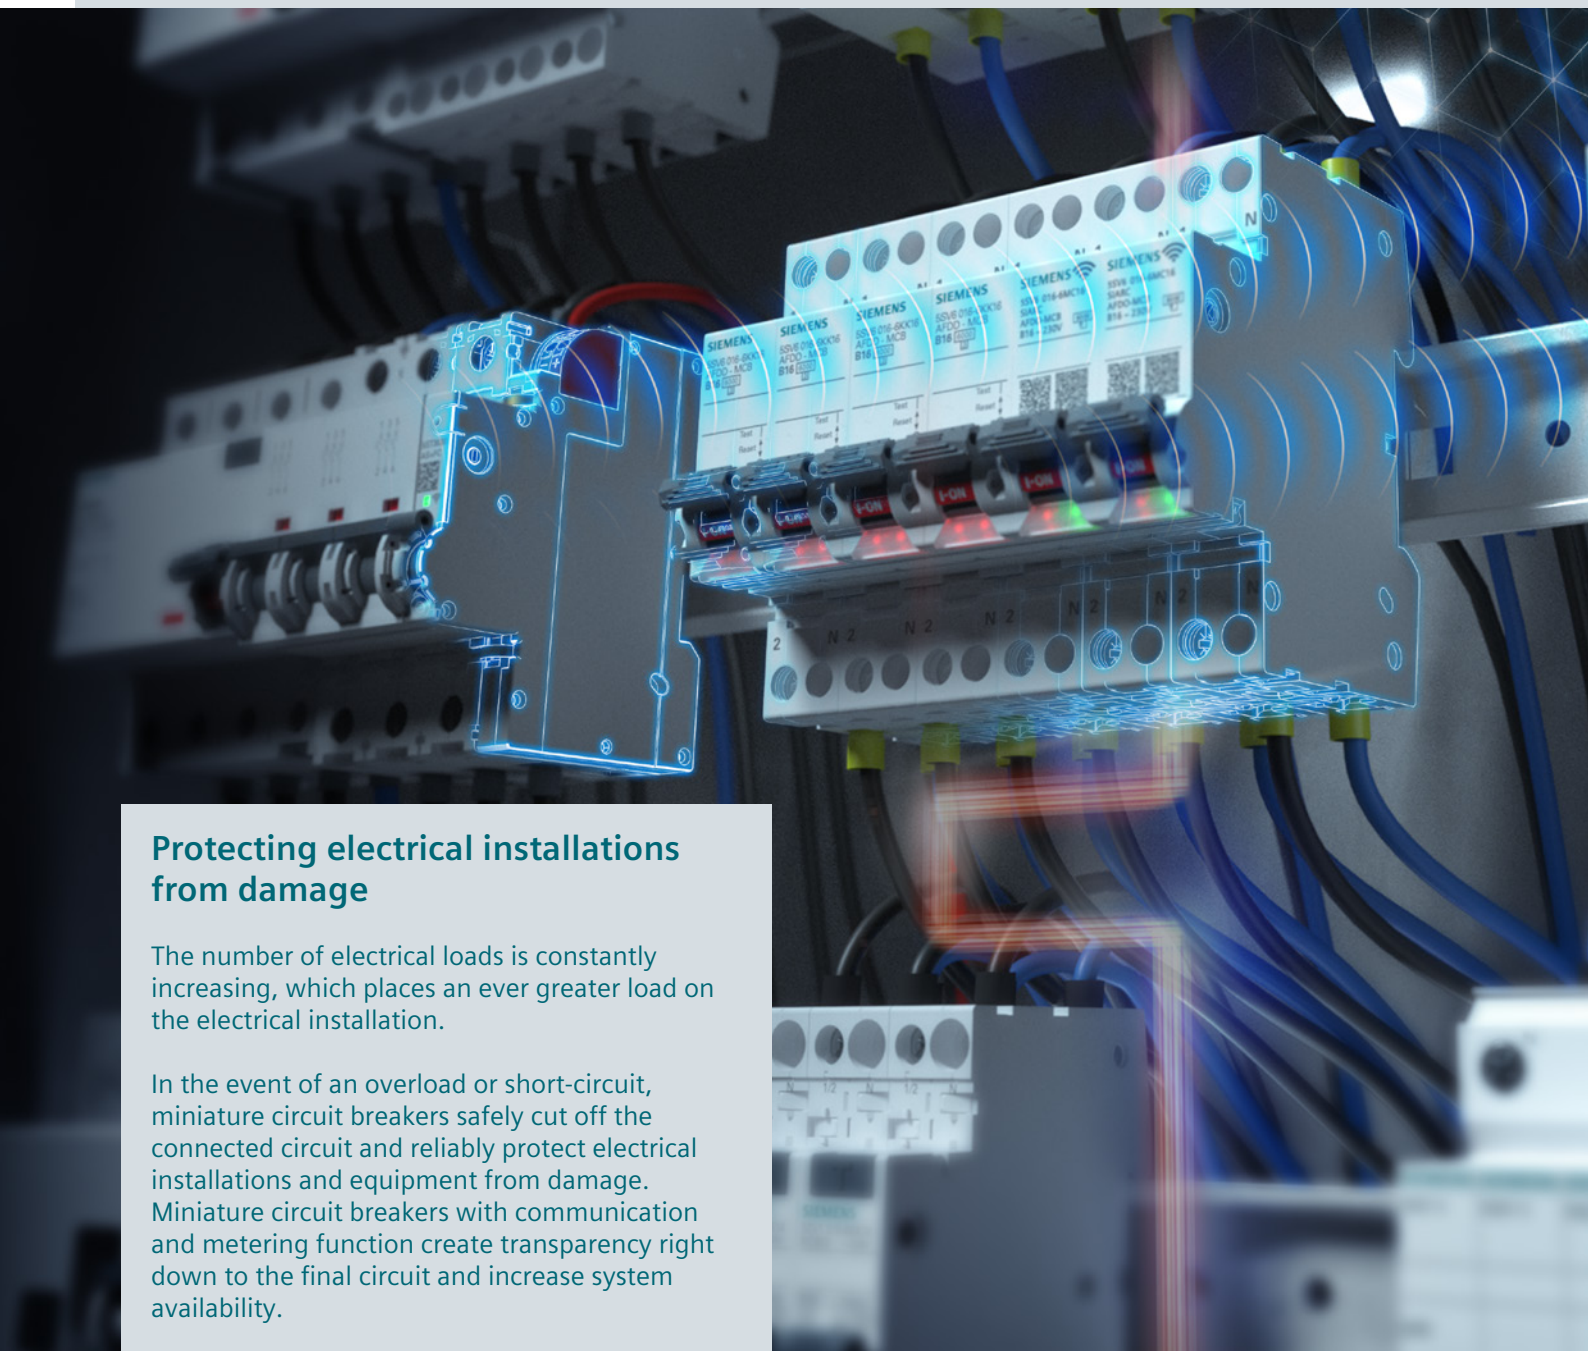
14

15

16

17

A



Protecting electrical installations from damage

The number of electrical loads is constantly increasing, which places an ever greater load on the electrical installation.

In the event of an overload or short-circuit, miniature circuit breakers safely cut off the connected circuit and reliably protect electrical installations and equipment from damage. Miniature circuit breakers with communication and metering function create transparency right down to the final circuit and increase system availability.

Miniature circuit breakers from the SENTRON portfolio are also simple to mount and install. The devices have a uniform design and, with the appropriate accessories, can be expanded by many additional functions.

For industry, buildings or infrastructure – with our versatile portfolio, you will find a suitable miniature circuit breaker for any application.

Miniature Circuit Breakers



All the information you need	3/2
Devices for all applications	3/4
System overview	3/5
Quick selection guide	3/6
Miniature circuit breakers	3/6
Device protection switches	3/10
Basic units	3/12
5SL3 miniature circuit breakers	3/12
5SL6 miniature circuit breakers	3/14
5SL4 miniature circuit breakers	3/16
5SJ6...-KS miniature circuit breakers	3/18
5SL30 miniature circuit breakers	3/20
5SL60 miniature circuit breakers	3/22
5SY6 miniature circuit breakers	3/24
5SY4 miniature circuit breakers	3/26
5SP4 miniature circuit breakers	3/28
5SY5 miniature circuit breakers	3/30
5SY7 miniature circuit breakers	3/32
5SY8 miniature circuit breakers	3/34
5SJ4..HG.. miniature circuit breakers	3/36
5SL6 COM miniature circuit breakers with communication and metering functions new	3/38
5SP3 selective main miniature circuit breakers (SHU)	3/40
5SY17 device protection switches	3/42
5SK9 device protection switches	3/43
Accessories	3/44
Overview of the modular system	3/44
Electrical accessories	3/46
Mechanical accessories	3/56
Standard busbars	3/58
Compact busbars	3/69
Accessories for busbars	3/74
Distribution blocks for standard rail mounting	3/80
SIKclip wiring system	3/83

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about miniature circuit breakers, please visit our websites

www.siemens.com/mcb

www.siemens.com/protection-concept

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information

www.siemens.com/lowvoltage/product-support

- Technical basic information – SENTRON protection concept ([109767456](#))
- Technology primer – Miniature circuit breakers ([109482304](#))

The relevant tender specifications can be found at www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- Miniature circuit breakers (general) bit.ly/2kJP2Dq

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Miniature circuit breakers sie.ag/2kTFX15

Direct forwarding to the individual products in the Industry Mall by clicking on the Article No. in the catalog or by entering this web address incl. Article No.

www.siemens.com/product?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.

You can find your local contacts at

www.siemens.com/lowvoltage/components/contact

You can find further information on services at

www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at

www.siemens.com/lowvoltage/support-request

... can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information

www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the [App Store](#) and [Play Store](#)

You will find further information under:

www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
www.siemens.com/lowvoltage/mall
- Image database
www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at

www.siemens.com/lowvoltage/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at

www.siemens.com/lowvoltage/manuals

- Configuration manual – Miniature circuit breakers
(45302792)

Classroom or online training

Our training courses can be found at

www.siemens.com/sitrain-lowvoltage

- Protection concept (WT-LVBPC)

Technical overview – Miniature circuit breakers



The fast way to get you to our online services

This page provides you with comprehensive information and links on miniature circuit breakers

www.siemens.com/lowvoltage/product-support (109769082)

Devices for all applications

3

Miniature circuit breakers for basic applications



Ideal for standard applications

The 5SL miniature circuit breakers are the new standard with B and C tripping characteristics for applications up to 63 A. They can be used to disconnect or isolate equipment.

The 5SL devices are mainly installed in meter panels and small distribution boards to protect circuits for lamps, cookers and even machines, for example, in residential or commercial buildings.

Miniature circuit breakers for advanced applications



Ideal for industrial applications

For circuits with motors or large lamps, semiconductors or strong pulse-generating equipment such as transformers and solenoid valves - the 5SY and 5SP devices are optimized for industrial applications and are proven in use.

The 5SY devices offer you top quality and functionality for installation in complex buildings and industry. With a rated breaking capacity of up to 25 kA, they are able to handle the most challenging requirements at a rated current of 0.3 to 80 A.

Special features

- Dual-chamber terminals
- Simple to detach without tools using sliding catches
- Separate switching position indication
- A wide range of accessories
- 5SL60 available as communication-capable miniature circuit breaker

Device protection switches for advanced applications



Ideal for devices in industry

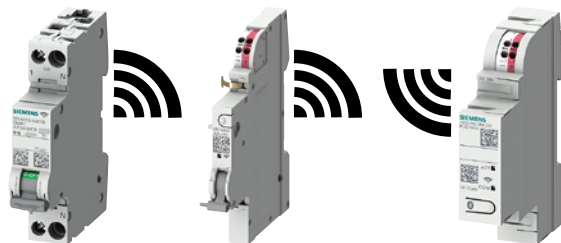
Device protection switches from Siemens offer optimum protection for all applications in AC and DC control circuits in industrial applications and plant engineering.

Thermomagnetic 5SY17 device protection switches are used to protect solenoid valves, servo motors, signal lamps or even PLC inputs. Everywhere where loads have to be precisely protected from overloads and short-circuits.

Electronic 5SK9 device protection switches are optimally suited to protecting, for example, relays, programmable controllers, motors, sensors, actuators and valves. A current analysis in conjunction with fast tripping in the event of a fault avoid the danger of overloading the switched-mode power supply.

5SL6 COM miniature circuit breakers and 5ST3 COM auxiliary switches/fault signal contacts with communication and metering functions **new**

The new communication-capable protective devices and auxiliary components record measured values and status information and transmit this data wirelessly to higher-level systems.



- Recording of energy and active power, current, voltage, line frequency and temperature
- Integrated status acquisition, operating hours counter and short-circuit counter
- Higher system availability through early response to warning messages
- Convenient integration into new and existing systems thanks to small widths of 1 MW
- Fast parameterization and commissioning with the SENTRON powerconfig mobile app or the SENTRON powerconfig software
- Wireless transmission of measurement data from up to 24 communication-capable devices to the 7KN Powercenter 1000 data transceiver [see page 10/16](#)

System overview

Basic units and accessories


Miniature circuit breakers for basic applications



Miniature circuit breakers for advanced applications



Device protection switches for advanced applications




Electrical accessories



Mechanical accessories



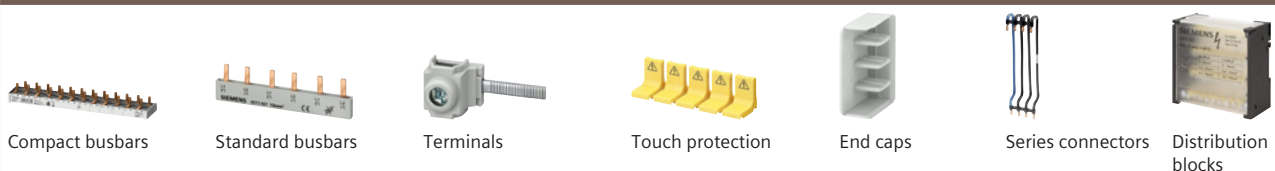Busbars and accessories



Note:

You will find a detailed range of accessories with the basic units and in the Accessories section.

Miniature circuit breakers

For basic applications for buildings and infrastructure



5SL3



5SL6

Standards			IEC / EN 60898-1	IEC / EN 60898-1
Standards			IEC / EN 60898-1	IEC / EN 60898-1
Basic data				
Breaking capacity I_{cn} for AC (230/400 V)	kA		4.5	6
Rated current	A		0.3 ... 63	0.3 ... 63
Number of poles			1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 4P 1P+N 3P+N
Tripping characteristic			B C	B C
Approvals				
General product approvals			VDE, CEBC, TSE	VDE, CEBC, TSE
Marine classifications			–	–
Operational voltage				
Max. AC	V		250/440	250/440
Max. DC per pole, acc. to EN 60898-2, EN 60947-2	V		72	72
Max. AC, acc. to UL 1077, CSA C22.2 No.235	V		–	–
Rated voltage AC, acc. to UL 489	V		–	–
Rated impulse withstand voltage U_{imp}	kV		4	4
Rated frequency f_n	Hz		50/60	50/60
Connection				
Dual-chamber terminal			–	–
Conductor cross-section 1 wire	Solid/stranded	mm ²	0.75 ... 35	0.75 ... 35
	Finely stranded with end sleeve	mm ²	0.75 ... 25	0.75 ... 25
	Finely stranded without end sleeve	mm ²	1 ... 35	1 ... 35
Conductor cross-section 2 wires (same cross-section and same conductor type)	Solid/stranded	mm ²	0.75 ... 10	0.75 ... 10
	Finely stranded with end sleeve	mm ²	0.75 ... 4	0.75 ... 4
	Finely stranded without end sleeve	mm ²	1 ... 4	1 ... 4
Conductor cross-section 1-wire + busbar (pin thickness 1.5 mm)	Solid/stranded	mm ²	10 ... 25	10 ... 25
	Finely stranded with non-insulated end sleeve	mm ²	6 ... 25	6 ... 25
	Finely stranded with insulated end sleeve	mm ²	6 ... 16	6 ... 16
Ambient conditions				
Ambient temperature ⁵⁾	°C		–25 ... +45 ¹⁾	–25 ... +45 ¹⁾
Storage temperature	°C		–40 ... +75 ³⁾	–40 ... +75 ³⁾
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine			–	–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1 mm) and at 25 ... 150 Hz (50 m/s ²)			–	–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)			–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)			–	–
Pollution degree for overvoltage category			2/III	2/III
More information			See page 3/12	See page 3/14

¹⁾ Periodically +55 °C, max. 95% humidity

²⁾ Max. 95% humidity

³⁾ 95% humidity up to 55 °C

55% humidity up to 70 °C

30% humidity up to 75 °C

⁴⁾ Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity

⁵⁾ The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

**5SL4****5SJ6...-.KS****5SL30****5SL60****5SP3**

IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	DIN VDE 0641-21
10	6	4.5	6	25
0.3 ... 63	10 ... 20	2 ... 40	2 ... 40	16 ... 63
1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 1P+N	1P+N	1P+N	1P 2P 3P 4P
B C D	B C	C	B C	E
VDE, CEBC, IMQ	VDE	VDE, IMQ, NF, CCC	VDE, IMQ, NF, CCC	VDE
–	–	–	DNV-GL	–
250/440	250/440	250	250	–
72	60	72	72	–
–	–	–	–	–
–	–	–	–	–
4	4	4	4	4
50/60	50/60	50/60	50/60	50/60
–	Plug-in terminal on outgoing side	–	–	–
0.75 ... 35	1.5 ... 4 (top) 0.75 ... 25 (bottom)	0.75 ... 16	0.75 ... 16	2.5 ... 50 (bottom)
0.75 ... 25	1.5 ... 2.5 (top) 0.75 ... 25 (bottom)	0.75 ... 10	0.75 ... 10	2.5 ... 50 (bottom)
1 ... 35	1.5 ... 4	0.75 ... 16	0.75 ... 16	2.5 ... 16 (top)
0.75 ... 10	–	0.75 ... 4	0.75 ... 4	–
0.75 ... 4	–	0.75 ... 1,5	0.75 ... 1,5	–
1 ... 4	–	0.75 ... 4	0.75 ... 4	–
10 ... 25	–	–	–	–
6 ... 25	–	6 ... 10	6 ... 10	–
6 ... 16	–	6 ... 10	6 ... 10	–
–25 ... +55 ²⁾	–25 ... +45 ¹⁾	–25 ... +60	–25 ... +60 ⁴⁾	–25 ... +55
–40 ... +75 ³⁾	–40 ... +75 ³⁾	–40 ... +75	–40 ... +75	–40 ... +70
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
2/III	2/III	2/III	2/III	3/IV
See page 3/16	See page 3/18	See page 3/20	See page 3/22	See page 3/40

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and machine manufacturing



SSL6 COM

5SY6

5SY4

Standards			IEC/EN 60898-1		IEC/EN 60898-1 IEC/EN 60947-2 UL 1077		IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	
Basic data								
Breaking capacity I _{cn}		For AC (230/400 V) acc. to IEC/EN 60898-1 AC Acc. to UL1077 and CSA C22.2 No.235	kA	6	6	10		
			SC	–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50°C		
Rated breaking capacity I _{cu} acc. to IEC/EN 60947-2 at U _e 230 V at U _e 400 V (1P, 1P+N) (2P, 3P, 4P, 3P+N)		I _n 0,3 ... 2 A	kA	–	30 30	35 35		
		I _n 3 ... 6 A	kA	–	30 30	35 35		
		I _n 8 ... 10 A	kA	–	15 15	20 20		
		I _n 13 ... 32 A	kA	–	15 15	20 20		
		I _n 35 ... 40 A	kA	–	10 10	15 15		
		I _n 50 ... 63 A	kA	–	10 10	15 15		
		I _n 80 ... 125 A	kA	–	– –	10 10		
Rated current		A	2 ... 32	0.3 ... 63	0.3 ... 80			
Number of poles			1P+N	1P 2P 3P 4P 1P+N 3P+N	1P 2P 3P 4P 1P+N 3P+N			
Tripping characteristic			B C	B C	A B C D			
Approvals								
General product approvals			VDE, RED	VDE, IMQ, CCC, 	VDE, IMQ, CCC, 			
Marine classifications			–	DNV-GL, LR, BV, RINA, ABS	DNV-GL, LR, BV, RINA, ABS			
Operational voltage								
Max. AC		Acc. to EN 60898-1/-2, EN 60947-2	V	250	250/440	250/440		
		Acc. to UL 1077, CSA C22.2 No.235	V	–	277/480	277/480		
Max. DC per pole		Acc. to EN 60898-1/-2, EN 60947-2	V	72	72 ¹⁾	72 ¹⁾		
Rated voltage AC		Acc. to UL 489	V	–	–	–		
Rated impulse withstand voltage U _{imp}			kV	4	4	4		
Rated frequency f _n			Hz	50/60	50/60	50/60		
Connection								
Dual-chamber terminal			–	■	■			
Conductor cross-section 1 wire		Solid/stranded	mm ²	0.75 ... 16	0.75 ... 35	0.75 ... 35		
		Finely stranded, with end sleeve	mm ²	0.75 ... 10	0.75 ... 25	0.75 ... 25		
		Conductors (Cu 60/75 °C I _n ≤40 A; 60 °C I _n >40 A)	–	AWG 18 ... 4	AWG 18 ... 4			
Terminal tightening torque			Nm	1.5 ... 2.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.		
			lb-in	13 ... 22	22 ... 26	22 ... 26		
Ambient conditions								
Ambient temperature ⁷⁾			°C	–25 ... +60 ⁵⁾	–25 ... +55 ⁴⁾	–40 ... +70 ³⁾		
Storage temperature			°C	–40 ... +75	–40 ... +75 ³⁾	–40 ... +75 ³⁾		
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine			–	■	■			
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s ²)			–	■	■			
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 „1B“ (railway engineering)			–	–	■			
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)			–	–	■			
Pollution degree for overvoltage category			2/III	3/III	3/III			
Additional functions								
Communication and metering function ⁸⁾			■	–	–			
More information								

¹⁾ Exempt: C/D 0.3 A ... 0.5 A

²⁾ 5SY54.. 4-pole, degree of pollution 2 for overvoltage category II

³⁾ 95% humidity up to 55 °C
55% humidity up to 70 °C
30% humidity up to 75 °C

⁴⁾ Max. 95% humidity

⁵⁾ Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity

⁶⁾ When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet

**5SP4****5SY5****5SY7****5SY8****5SJ4..HG..**IEC/EN 60898-1
UL 1077IEC/EN 60898-2
UL 1077IEC/EN 60898-1
IEC/EN 60947-2
UL 1077IEC/EN 60947-2
UL 1077IEC/EN 60947-2
UL 489

10

10

15

25

–

Supplementary protector, OC,
FW 0, OL 0, TC 3 at 50°Csupplementary protector, OC,
FW 0, OL 0, TC 3 at 50°Csupplementary protector, OC,
FW 0, OL 0, TC 3 at 50°Csupplementary protector, OC,
FW 0, OL 0, TC 3 at 50°C

–

U2: see Certificate of
ComplianceU2: see Certificate of
ComplianceU2: see Certificate of
ComplianceU2: see Certificate of
Compliance

–

– | –

– | –

50 | 50

70 | 70

10

– | –

– | –

40 | 40

50 | 50

10

– | –

– | –

30 | 30

40 | 40

10

– | –

– | –

25 | 25

30 | 30

10

– | –

– | –

20 | 20

25 | 25

10

– | –

– | –

15 | 15

20 | 20

10

10 | 10

– | –

– | –

– | –

–

80 ... 125

0.3 ... 63

0.3 ... 63

0.3 ... 63

0.3 ... 63

1P | 2P | 3P | 4P

1P | 2P | 4P

1P | 2P | 3P | 4P | 1P+N | 3P+N

1P | 2P | 3P | 4P | 1P+N | 3P+N

1P | 2P | 3P

B | C | D

B | C

B | C | D

C | D

B | C | D

VDE, CCC,

LRVDE, CCC,

ABSVDE, IMQ, CCC,

DNV-GL, LR, BV, RINA, ABS
ABSVDE, CCC,

–

250/440

250/440

250/440

250/440

250/440

277/480

–

277/480

277/480

–

72

250

72 ¹⁾72 ¹⁾

60

–

–

–

–

277/480

4

4

4

4

4

50/60

50/60

50/60

50/60

50/60

–

■

■

■

■

10 ... 50

0.75 ... 35

0.75 ... 35

0.75 ... 35

0.75 ... 25 (16) ⁶⁾

10 ... 35

0.75 ... 25

0.75 ... 25

0.75 ... 25

0.75 ... 25 (10)

AWG 3 ... 1

AWG 18 ... 4

AWG 18 ... 4

AWG 18 ... 4

AWG 18 ... 4 (5)

2.5 ... 3.5 max.

2.5 ... 3.5 max.

2.5 ... 3.5 max.

2.5 ... 3.5 max.

2.5 ... 3.5 max.

22 ... 31

22 ... 26

22 ... 26

22 ... 26

22 ... 26

–25 ... +55 ⁴⁾–40 ... +70 ³⁾–40 ... +70 ³⁾–25 ... +55 ⁴⁾–25 ... +55 ⁴⁾–40 ... +75 ³⁾–40 ... +75 ³⁾–40 ... +75 ³⁾–40 ... +75 ³⁾–40 ... +75 ³⁾

–

■

■

–

■

■

■

■

■

■

–

■

■

–

–

■

■

■

–

–

3/III

3/III ⁴⁾

3/III

3/III

3/III

–

–

–

–

–

siehe Seite 3/28

siehe Seite 3/30

siehe Seite 3/32

siehe Seite 3/34

siehe Seite 3/36

⁷⁾ The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

⁸⁾ Please note the country-specific radio licenses of the products in SIOS:
www.siemens.com/lowvoltage/certificates

Device protection switches

For advanced applications for industry and machine manufacturing



5SY17

Standards

Standards

IEC / EN 60934
UL 1077

Basic data

Breaking capacity I_{cn}	At rated voltage	kA	3
Rated current		A	0.5 ... 16
Number of poles			1P+AS
DC tripping	Magnetic		F1 (2.5 ... 4 × I_n) F2 (4 ... 7 × I_n)
	Thermal		1.05 × holding current 1.35 × tripping current TC3 1.35 × I_n
	Electronic		–
Service life	Actuations		6000

Approvals

General product approvals



Operational voltage

Min. AC	Acc. to EN 60934	V	12 ²⁾
	Acc. to UL 1077, CSA C22.2 No.235	V	12 ²⁾
Max. AC	Acc. to EN 60934	V	250
	Acc. to UL 1077, CSA C22.2 No.235	V	277
Min. DC per pole		V	12 ²⁾
Max. DC per pole		V	72
Rated voltage	Acc. to IEC / EN 60934	V	230
	Acc. to UL 1077	V	277
Rated impulse withstand voltage U_{imp}		kV	4
Rated frequency f_n		Hz	50/60

Auxiliary switch

Min. operational voltage (AC)	V	12
Max. operational voltage (AC)	V	250
Min. operational voltage (DC)	V	12
Max. operational voltage (DC)	V	60
Utilization category AC-12		6A at 230 V AC
Utilization category AC-14		6A at 230 V AC
Utilization category DC-13		1A at 60 V DC

Connection

Dual-chamber terminal			–
Conductor cross-section 1 wire	Solid/stranded	mm ²	0.75 ... 16
	Finely stranded with end sleeve	mm ²	0.75 ... 10
	Finely stranded with insulated end sleeve	mm ²	0.75 ... 10
	Finely stranded without end sleeve	mm ²	0.75 ... 16
	Conductor cross-section AWG		–
2-wire (same cross-section)	Solid/stranded	mm ²	0.75 ... 4
	Finely stranded with end sleeve	mm ²	0.75 ... 2.5
	Finely stranded with insulated end sleeve	mm ²	0.75 ... 1.5
	Finely stranded without end sleeve	mm ²	0.75 ... 4
Terminal tightening torque		Nm	2.0 ... 2.5 max.
		lb-in	17.7 ... 22.1

Ambient conditions

Ambient temperature	°C	–25 ... +60 ³⁾
Storage temperature	°C	–40 ... +70
Shock acc. to IEC 60068-2-27 150 m/s ² at 11 ms half-sine		–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s ²)		–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)		–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)		–
Pollution degree for overvoltage category	Acc. to IEC	2/III

More information

See page 3/42

¹⁾ Max. 95% humidity

²⁾ At a minimum current of 100 mA



5SK9

EN 61000-6-2, EN 61000-6-3, EN 60068-2-78,
EN 50178, EN 60068-2-6, EN 60068-2-27,
UL 508, UL 2367

—

1 ... 8

1P+AS

—

—

Overload $1.2 \times I_n / 1s$ | Short-circuit $2 \times I_n / <10 ms$

—

c **RU** **US**

—

—

—

—

—

30

—

—

0.5

—

—

—

—

—

—

—

—

—

—

—

—

0.2 ... 4

0.2 ... 2.5

0.2 ... 2.5

—

AWG 24 ... 12

—

—

—

—

—

—

—

–25 ... +60 ¹⁾

–40 ... +70

—

—

—

—

—




[See page 3/43](#)

³⁾ Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity


5SL3 miniature circuit breakers

4.5 kA

3

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL3114-7	–	5SL3514-7	–	5SL3214-7	–	–
0.5 A	–	5SL3105-7	–	5SL3505-7	–	5SL3205-7	–	–
1 A	–	5SL3101-7	–	5SL3501-7	–	5SL3201-7	–	5SL3301-7
1.6 A	–	5SL3115-7	–	5SL3515-7	–	5SL3215-7	–	–
2 A	–	5SL3102-7	–	5SL3502-7	–	5SL3202-7	–	5SL3302-7
3 A	–	5SL3103-7	–	5SL3503-7	–	5SL3203-7	–	5SL3303-7
4 A	–	5SL3104-7	–	5SL3504-7	–	5SL3204-7	–	5SL3304-7
6 A	5SL3106-6	5SL3106-7	5SL3506-6	5SL3506-7	5SL3206-6	5SL3206-7	5SL3306-6	5SL3306-7
8 A	–	5SL3108-7	–	5SL3508-7	–	5SL3208-7	–	–
10 A	5SL3110-6	5SL3110-7	5SL3510-6	5SL3510-7	5SL3210-6	5SL3210-7	5SL3310-6	5SL3310-7
13 A	5SL3113-6	5SL3113-7	5SL3513-6	5SL3513-7	5SL3213-6	5SL3213-7	–	–
16 A	5SL3116-6	5SL3116-7	5SL3516-6	5SL3516-7	5SL3216-6	5SL3216-7	5SL3316-6	5SL3316-7
20 A	5SL3120-6	5SL3120-7	5SL3520-6	5SL3520-7	5SL3220-6	5SL3220-7	5SL3320-6	5SL3320-7
25 A	5SL3125-6	5SL3125-7	5SL3525-6	5SL3525-7	5SL3225-6	5SL3225-7	5SL3325-6	5SL3325-7
32 A	5SL3132-6	5SL3132-7	5SL3532-6	5SL3532-7	5SL3232-6	5SL3232-7	5SL3332-6	5SL3332-7
40 A	5SL3140-6	5SL3140-7	5SL3540-6	5SL3540-7	5SL3240-6	5SL3240-7	5SL3340-6	5SL3340-7
50 A	5SL3150-6	5SL3150-7	5SL3550-6	5SL3550-7	5SL3250-6	5SL3250-7	5SL3350-6	5SL3350-7
63 A	5SL3163-6	5SL3163-7	5SL3563-6	5SL3563-7	5SL3263-6	5SL3263-7	5SL3363-6	5SL3363-7

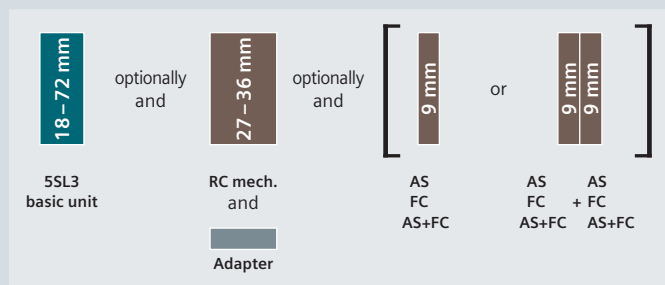Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/54](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	–	–	–
–	–	–	–
–	5SL3601-7	–	5SL3401-7
–	–	–	–
–	5SL3602-7	–	5SL3402-7
–	5SL3603-7	–	5SL3403-7
–	5SL3604-7	–	5SL3404-7
5SL3606-6	5SL3606-7	–	5SL3406-7
–	5SL3608-7	–	–
5SL3610-6	5SL3610-7	–	5SL3410-7
5SL3613-6	5SL3613-7	–	5SL3413-7
5SL3616-6	5SL3616-7	–	5SL3416-7
5SL3620-6	5SL3620-7	–	5SL3420-7
5SL3625-6	5SL3625-7	–	5SL3425-7
5SL3632-6	5SL3632-7	–	5SL3432-7
5SL3640-6	5SL3640-7	–	5SL3440-7
5SL3650-6	5SL3650-7	–	5SL3450-7
5SL3663-6	5SL3663-7	–	5SL3463-7

Accessories




Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7


5SL6 miniature circuit breakers

6 kA

3

Mounting width	1P	1P+N	2P	3P				
	230/400 V AC	230 V AC	400 V AC	400 V AC				
	1 MW	2 MW	2 MW	3 MW				
								
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL6114-7	–	5SL6514-7	–	5SL6214-7	–	5SL6314-7
0.5 A	–	5SL6105-7	–	5SL6505-7	–	5SL6205-7	–	5SL6305-7
1 A	–	5SL6101-7	–	5SL6501-7	–	5SL6201-7	–	5SL6301-7
1.6 A	–	5SL6115-7	–	5SL6515-7	–	5SL6215-7	–	5SL6315-7
2 A	5SL6102-6	5SL6102-7	–	5SL6502-7	–	5SL6202-7	–	5SL6302-7
3 A	–	5SL6103-7	–	5SL6503-7	–	5SL6203-7	–	5SL6303-7
4 A	5SL6104-6	5SL6104-7	–	5SL6504-7	–	5SL6204-7	–	5SL6304-7
6 A	5SL6106-6	5SL6106-7	5SL6506-6	5SL6506-7	5SL6206-6	5SL6206-7	5SL6306-6	5SL6306-7
8 A	–	5SL6108-7	–	5SL6508-7	–	5SL6208-7	–	5SL6308-7
10 A	5SL6110-6	5SL6110-7	5SL6510-6	5SL6510-7	5SL6210-6	5SL6210-7	5SL6310-6	5SL6310-7
13 A	5SL6113-6	5SL6113-7	5SL6513-6	5SL6513-7	5SL6213-6	5SL6213-7	5SL6313-6	5SL6313-7
16 A	5SL6116-6	5SL6116-7	5SL6516-6	5SL6516-7	5SL6216-6	5SL6216-7	5SL6316-6	5SL6316-7
20 A	5SL6120-6	5SL6120-7	5SL6520-6	5SL6520-7	5SL6220-6	5SL6220-7	5SL6320-6	5SL6320-7
25 A	5SL6125-6	5SL6125-7	5SL6525-6	5SL6525-7	5SL6225-6	5SL6225-7	5SL6325-6	5SL6325-7
32 A	5SL6132-6	5SL6132-7	5SL6532-6	5SL6532-7	5SL6232-6	5SL6232-7	5SL6332-6	5SL6332-7
40 A	5SL6140-6	5SL6140-7	5SL6540-6	5SL6540-7	5SL6240-6	5SL6240-7	5SL6340-6	5SL6340-7
50 A	5SL6150-6	5SL6150-7	5SL6550-6	5SL6550-7	5SL6250-6	5SL6250-7	5SL6350-6	5SL6350-7
63 A	5SL6163-6	5SL6163-7	5SL6563-6	5SL6563-7	5SL6263-6	5SL6263-7	5SL6363-6	5SL6363-7

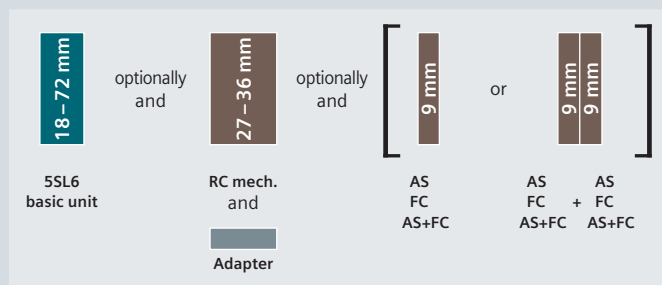Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/54](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	5SL6614-7	–	5SL6414-7
–	5SL6605-7	–	5SL6405-7
–	5SL6601-7	–	5SL6401-7
–	5SL6615-7	–	5SL6415-7
–	5SL6602-7	–	5SL6402-7
–	5SL6603-7	–	5SL6403-7
–	5SL6604-7	–	5SL6404-7
5SL6606-6	5SL6606-7	5SL6406-6	5SL6406-7
–	5SL6608-7	–	5SL6408-7
5SL6610-6	5SL6610-7	5SL6410-6	5SL6410-7
5SL6613-6	5SL6613-7	5SL6413-6	5SL6413-7
5SL6616-6	5SL6616-7	5SL6416-6	5SL6416-7
5SL6620-6	5SL6620-7	5SL6420-6	5SL6420-7
5SL6625-6	5SL6625-7	5SL6425-6	5SL6425-7
5SL6632-6	5SL6632-7	5SL6432-6	5SL6432-7
5SL6640-6	5SL6640-7	5SL6440-6	5SL6440-7
5SL6650-6	5SL6650-7	5SL6450-6	5SL6450-7
5SL6663-6	5SL6663-7	5SL6463-6	5SL6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022


Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7

5SL4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC			1P+N 230 V AC			2P 400 V AC		
	1 MW			2 MW			2 MW		
Rated current I_n	Characteristic			Characteristic			Characteristic		
	B	C	D	B	C	D	B	C	D
0.3 A	–	5SL4114-7	5SL4114-8	–	5SL4514-7	5SL4514-8	–	5SL4214-7	5SL4214-8
0.5 A	–	5SL4105-7	5SL4105-8	–	5SL4505-7	5SL4505-8	–	5SL4205-7	5SL4205-8
1 A	5SL4101-6	5SL4101-7	5SL4101-8	5SL4501-6	5SL4501-7	5SL4501-8	5SL4201-6	5SL4201-7	5SL4201-8
1.6 A	–	5SL4115-7	5SL4115-8	–	5SL4515-7	5SL4515-8	–	5SL4215-7	5SL4215-8
2 A	5SL4102-6	5SL4102-7	5SL4102-8	5SL4502-6	5SL4502-7	5SL4502-8	5SL4202-6	5SL4202-7	5SL4202-8
3 A	5SL4103-6	5SL4103-7	5SL4103-8	5SL4503-6	5SL4503-7	5SL4503-8	5SL4203-6	5SL4203-7	5SL4203-8
4 A	5SL4104-6	5SL4104-7	5SL4104-8	5SL4504-6	5SL4504-7	5SL4504-8	5SL4204-6	5SL4204-7	5SL4204-8
6 A	5SL4106-6	5SL4106-7	5SL4106-8	5SL4506-6	5SL4506-7	5SL4506-8	5SL4206-6	5SL4206-7	5SL4206-8
8 A	5SL4108-6	5SL4108-7	5SL4108-8	5SL4508-6	5SL4508-7	5SL4508-8	5SL4208-6	5SL4208-7	5SL4208-8
10 A	5SL4110-6	5SL4110-7	5SL4110-8	5SL4510-6	5SL4510-7	5SL4510-8	5SL4210-6	5SL4210-7	5SL4210-8
13 A	5SL4113-6	5SL4113-7	5SL4113-8	5SL4513-6	5SL4513-7	5SL4513-8	5SL4213-6	5SL4213-7	5SL4213-8
16 A	5SL4116-6	5SL4116-7	5SL4116-8	5SL4516-6	5SL4516-7	5SL4516-8	5SL4216-6	5SL4216-7	5SL4216-8
20 A	5SL4120-6	5SL4120-7	5SL4120-8	5SL4520-6	5SL4520-7	5SL4520-8	5SL4220-6	5SL4220-7	5SL4220-8
25 A	5SL4125-6	5SL4125-7	5SL4125-8	5SL4525-6	5SL4525-7	5SL4525-8	5SL4225-6	5SL4225-7	5SL4225-8
32 A	5SL4132-6	5SL4132-7	5SL4132-8	5SL4532-6	5SL4532-7	5SL4532-8	5SL4232-6	5SL4232-7	5SL4232-8
40 A	5SL4140-6	5SL4140-7	5SL4140-8	5SL4540-6	5SL4540-7	5SL4540-8	5SL4240-6	5SL4240-7	5SL4240-8
50 A	5SL4150-6	5SL4150-7	5SL4150-8	5SL4550-6	5SL4550-7	5SL4550-8	5SL4250-6	5SL4250-7	5SL4250-8
63 A	5SL4163-6	5SL4163-7	5SL4163-8	5SL4563-6	5SL4563-7	5SL4563-8	5SL4263-6	5SL4263-7	5SL4263-8

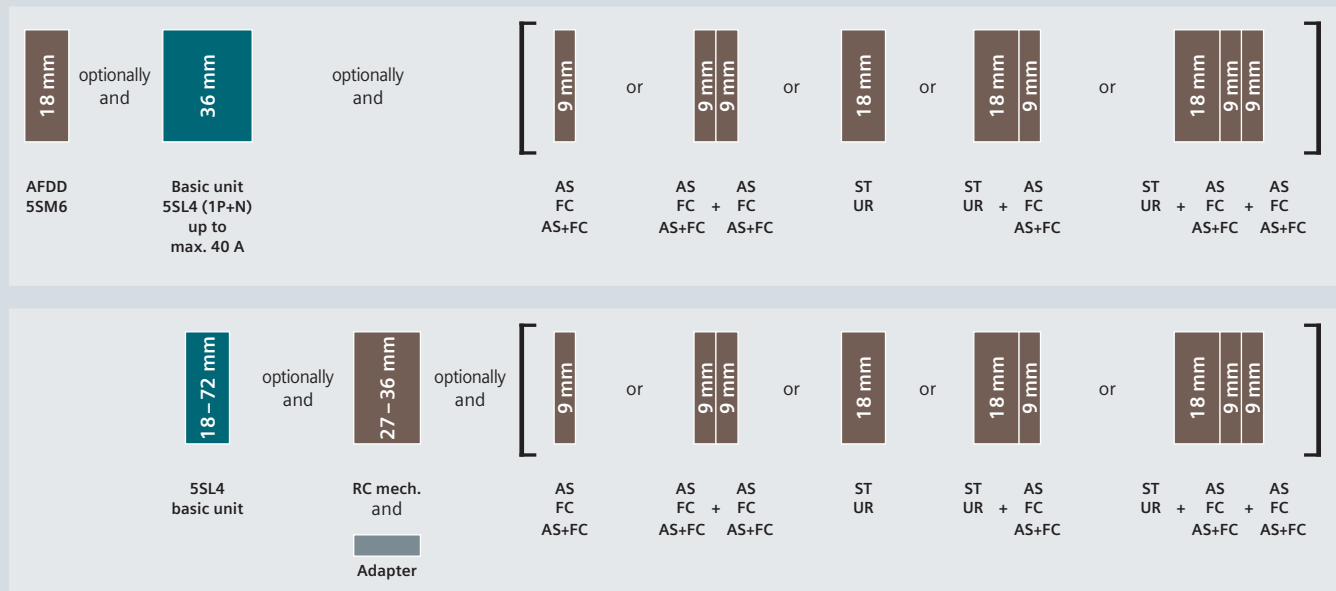Mounting concept



AFDD Arc fault detection units
AS Auxiliary switches
FC Fault signal contacts

[See page 3/55](#)
[See page 3/46](#)
[See page 3/48](#)

AS+FC Auxiliary switches and
fault signal contacts
ST Shunt trips

[See page 3/49](#)
[See page 3/52](#)

UR Undervoltage releases

RC mech. Remote controlled mechanisms

[See page 3/53](#)

[See page 3/54](#)



3

3P 400 V AC 3 MW			3P+N 400 V AC 4 MW			4P 400 V AC 4 MW		
Characteristic			Characteristic			Characteristic		
B	C	D	B	C	D	B	C	D
–	5SL4314-7	5SL4314-8	–	5SL4614-7	5SL4614-8	–	5SL4414-7	5SL4414-8
–	5SL4305-7	5SL4305-8	–	5SL4605-7	5SL4605-8	–	5SL4405-7	5SL4405-8
5SL4301-6	5SL4301-7	5SL4301-8	5SL4601-6	5SL4601-7	5SL4601-8	5SL4401-6	5SL4401-7	5SL4401-8
–	5SL4315-7	5SL4315-8	–	5SL4615-7	5SL4615-8	–	5SL4415-7	5SL4415-8
5SL4302-6	5SL4302-7	5SL4302-8	5SL4602-6	5SL4602-7	5SL4602-8	5SL4402-6	5SL4402-7	5SL4402-8
5SL4303-6	5SL4303-7	5SL4303-8	5SL4603-6	5SL4603-7	5SL4603-8	5SL4403-6	5SL4403-7	5SL4403-8
5SL4304-6	5SL4304-7	5SL4304-8	5SL4604-6	5SL4604-7	5SL4604-8	5SL4404-6	5SL4404-7	5SL4404-8
5SL4306-6	5SL4306-7	5SL4306-8	5SL4606-6	5SL4606-7	5SL4606-8	5SL4406-6	5SL4406-7	5SL4406-8
5SL4308-6	5SL4308-7	5SL4308-8	5SL4608-6	5SL4608-7	5SL4608-8	5SL4408-6	5SL4408-7	5SL4408-8
5SL4310-6	5SL4310-7	5SL4310-8	5SL4610-6	5SL4610-7	5SL4610-8	5SL4410-6	5SL4410-7	5SL4410-8
5SL4313-6	5SL4313-7	5SL4313-8	5SL4613-6	5SL4613-7	5SL4613-8	5SL4413-6	5SL4413-7	5SL4413-8
5SL4316-6	5SL4316-7	5SL4316-8	5SL4616-6	5SL4616-7	5SL4616-8	5SL4416-6	5SL4416-7	5SL4416-8
5SL4320-6	5SL4320-7	5SL4320-8	5SL4620-6	5SL4620-7	5SL4620-8	5SL4420-6	5SL4420-7	5SL4420-8
5SL4325-6	5SL4325-7	5SL4325-8	5SL4625-6	5SL4625-7	5SL4625-8	5SL4425-6	5SL4425-7	5SL4425-8
5SL4332-6	5SL4332-7	5SL4332-8	5SL4632-6	5SL4632-7	5SL4632-8	5SL4432-6	5SL4432-7	5SL4432-8
5SL4340-6	5SL4340-7	5SL4340-8	5SL4640-6	5SL4640-7	5SL4640-8	5SL4440-6	5SL4440-7	5SL4440-8
5SL4350-6	5SL4350-7	5SL4350-8	5SL4650-6	5SL4650-7	5SL4650-8	5SL4450-6	5SL4450-7	5SL4450-8
5SL4363-6	5SL4363-7	5SL4363-8	5SL4663-6	5SL4663-7	5SL4663-8	5SL4463-6	5SL4463-7	5SL4463-8

Accessories



Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-6
3–4 MW		5ST3820-7
Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (2 MW), not in combination with RC mech.	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2

5SJ6...-KS miniature circuit breakers


6 kA – plug-in terminal on outgoing side




	1P 230/400 V AC	1P+N 230/400 V AC	2P 230/400 V AC	3P 230/400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
			B		C		B	
			B		C		B	
			B		C		B	
			B		C		B	
10 A	5SJ6110-6KS	5SJ6110-7KS	5SJ6510-6KS	5SJ6510-7KS	5SJ6210-6KS	5SJ6210-7KS	5SJ6310-6KS	5SJ6310-7KS
13 A	5SJ6113-6KS	5SJ6113-7KS	5SJ6513-6KS	5SJ6513-7KS	5SJ6213-6KS	5SJ6213-7KS	5SJ6313-6KS	5SJ6313-7KS
16 A	5SJ6116-6KS	5SJ6116-7KS	5SJ6516-6KS	5SJ6516-7KS	5SJ6216-6KS	5SJ6216-7KS	5SJ6316-6KS	5SJ6316-7KS
20 A	5SJ6120-6KS	5SJ6120-7KS	5SJ6520-6KS	5SJ6520-7KS	5SJ6220-6KS	5SJ6220-7KS	5SJ6320-6KS	5SJ6320-7KS

5SL30 miniature circuit breakers

1P+N 4.5 kA compact miniature circuit breakers

Mounting width	1P+N (N pole right) 230 V AC	1P+N (N pole left) 230 V AC
	2 MW 	2 MW 
Rated current I_n	Characteristic C	Characteristic C
2 A	5SL3002-7	5SL3002-7KL
4 A	5SL3004-7	5SL3004-7KL
6 A	5SL3006-7	5SL3006-7KL
8 A	5SL3008-7	5SL3008-7KL
10 A	5SL3010-7	5SL3010-7KL
13 A	5SL3013-7	5SL3013-7KL
16 A	5SL3016-7	5SL3016-7KL
20 A	5SL3020-7	5SL3020-7KL
25 A	5SL3025-7	5SL3025-7KL
32 A	5SL3032-7	5SL3032-7KL
40 A	5SL3040-7	5SL3040-7KL

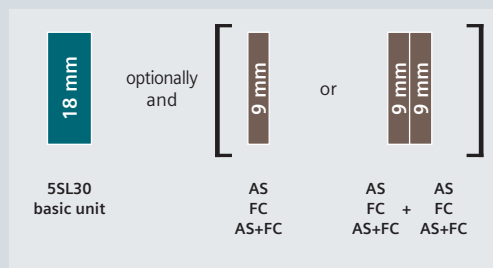Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)




Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016



Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC

5SL60 miniature circuit breakers

1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right) 230 V AC	1P+N (N pole left) 230 V AC
Mounting width	1 MW 	1 MW 
Rated current I _n	Characteristic	Characteristic
	B	C
2 A	–	5SL6002-7
4 A	–	5SL6004-7
6 A	5SL6006-6	5SL6006-7
8 A	–	5SL6008-7
10 A	5SL6010-6	5SL6010-7
13 A	5SL6013-6	5SL6013-7
16 A	5SL6016-6	5SL6016-7
20 A	5SL6020-6	5SL6020-7
25 A	5SL6025-6	5SL6025-7
32 A	5SL6032-6	5SL6032-7
40 A	5SL6040-6	5SL6040-7

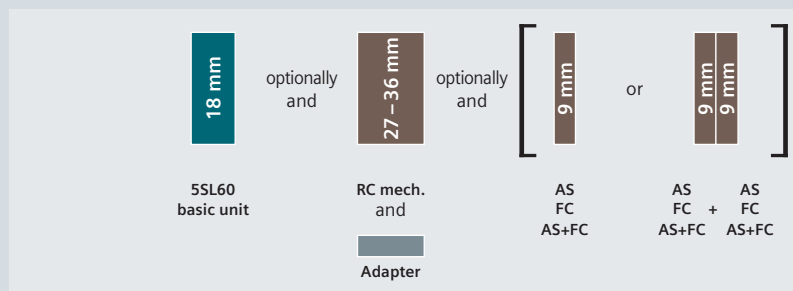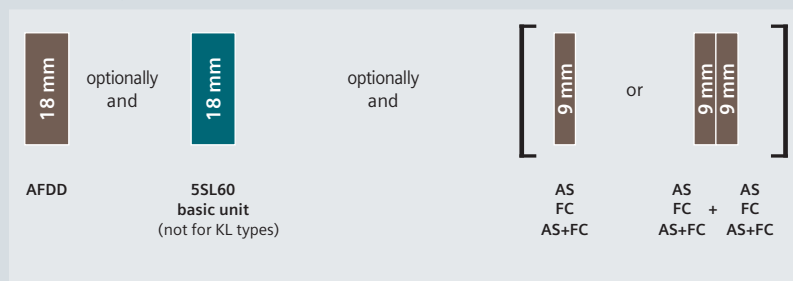Mounting concept



AFDD Arc fault detection units
 AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 RC mech. Remote controlled mechanisms

[See page 3/55](#)
[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/54](#)



Accessories




Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-OMC

Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6
Arc fault detection units (AFDD)		Article No.
For basic units 1P + N (1 MW), I_n up to 16 A		5SM6011-2
not for KL types I_n up to 40 A		5SM6014-2


5SY6 miniature circuit breakers

6 kA

3

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC				
Mounting width	1 MW 	2 MW 	2 MW 	3 MW 				
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SY6114-7	–	5SY6514-7	–	5SY6214-7	–	5SY6314-7
0.5 A	–	5SY6105-7	–	5SY6505-7	–	5SY6205-7	–	5SY6305-7
1 A	–	5SY6101-7	–	5SY6501-7	–	5SY6201-7	–	5SY6301-7
1.6 A	–	5SY6115-7	–	5SY6515-7	–	5SY6215-7	–	5SY6315-7
2 A	5SY6102-6	5SY6102-7	–	5SY6502-7	–	5SY6202-7	–	5SY6302-7
3 A	–	5SY6103-7	–	5SY6503-7	–	5SY6203-7	–	5SY6303-7
4 A	5SY6104-6	5SY6104-7	–	5SY6504-7	–	5SY6204-7	–	5SY6304-7
5 A	–	5SY6111-7	–	–	–	5SY6211-7	–	5SY6311-7
6 A	5SY6106-6	5SY6106-7	5SY6506-6	5SY6506-7	5SY6206-6	5SY6206-7	5SY6306-6	5SY6306-7
8 A	–	5SY6108-7	–	5SY6508-7	–	5SY6208-7	–	5SY6308-7
10 A	5SY6110-6	5SY6110-7	5SY6510-6	5SY6510-7	5SY6210-6	5SY6210-7	5SY6310-6	5SY6310-7
13 A	5SY6113-6	5SY6113-7	5SY6513-6	5SY6513-7	5SY6213-6	5SY6213-7	5SY6313-6	5SY6313-7
15 A	–	5SY6118-7	–	–	–	5SY6218-7	–	5SY6318-7
16 A	5SY6116-6	5SY6116-7	5SY6516-6	5SY6516-7	5SY6216-6	5SY6216-7	5SY6316-6	5SY6316-7
20 A	5SY6120-6	5SY6120-7	5SY6520-6	5SY6520-7	5SY6220-6	5SY6220-7	5SY6320-6	5SY6320-7
25 A	5SY6125-6	5SY6125-7	5SY6525-6	5SY6525-7	5SY6225-6	5SY6225-7	5SY6325-6	5SY6325-7
30 A	–	5SY6130-7	–	–	–	5SY6230-7	–	5SY6330-7
32 A	5SY6132-6	5SY6132-7	5SY6532-6	5SY6532-7	5SY6232-6	5SY6232-7	5SY6332-6	5SY6332-7
40 A	5SY6140-6	5SY6140-7	5SY6540-6	5SY6540-7	5SY6240-6	5SY6240-7	5SY6340-6	5SY6340-7
50 A	5SY6150-6	5SY6150-7	5SY6550-6	5SY6550-7	5SY6250-6	5SY6250-7	5SY6350-6	5SY6350-7
63 A	5SY6163-6	5SY6163-7	5SY6563-6	5SY6563-7	5SY6263-6	5SY6263-7	5SY6363-6	5SY6363-7

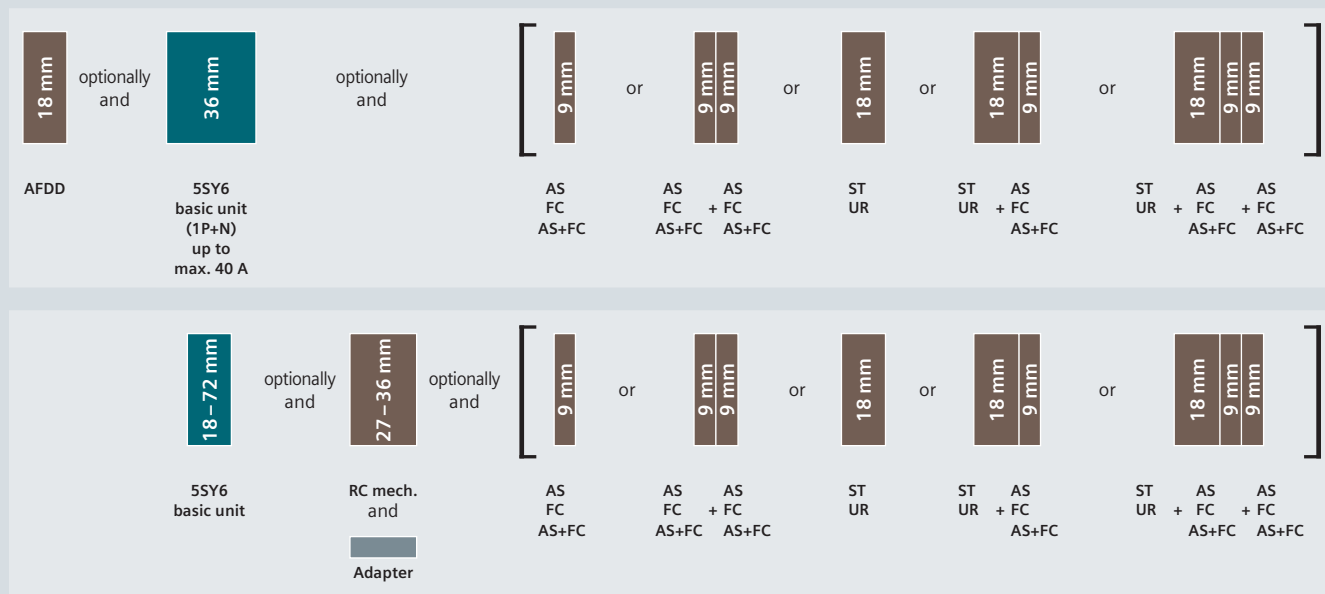Mounting concept



AFDD Arc fault detection units

[See page 3/55](#)

AS Auxiliary switches

[See page 3/46](#)

FC Fault signal contacts

[See page 3/48](#)

AS+FC Auxiliary switches and

fault signal contacts

[See page 3/49](#)

ST Shunt trips

[See page 3/52](#)

UR Undervoltage releases

[See page 3/53](#)

RC mech. Remote controlled mechanisms

[See page 3/54](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	5SY6614-7	–	5SY6414-7
–	5SY6605-7	–	5SY6405-7
–	5SY6601-7	–	5SY6401-7
–	5SY6615-7	–	5SY6415-7
–	5SY6602-7	–	5SY6402-7
–	5SY6603-7	–	5SY6403-7
–	5SY6604-7	–	5SY6404-7
–	–	–	–
5SY6606-6	5SY6606-7	5SY6406-6	5SY6406-7
–	5SY6608-7	–	5SY6408-7
5SY6610-6	5SY6610-7	5SY6410-6	5SY6410-7
5SY6613-6	5SY6613-7	5SY6413-6	5SY6413-7
–	–	–	–
5SY6616-6	5SY6616-7	5SY6416-6	5SY6416-7
5SY6620-6	5SY6620-7	5SY6420-6	5SY6420-7
5SY6625-6	5SY6625-7	5SY6425-6	5SY6425-7
–	–	–	–
5SY6632-6	5SY6632-7	5SY6432-6	5SY6432-7
5SY6640-6	5SY6640-7	5SY6440-6	5SY6440-7
5SY6650-6	5SY6650-7	5SY6450-6	5SY6450-7
5SY6663-6	5SY6663-7	5SY6463-6	5SY6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2
Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (2 MW), not in combination with RC mech.	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2

5SY4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC 1 MW				1P+N 230 V AC 2 MW				2P 400 V AC 2 MW			
Rated current I_n	Characteristic				Characteristic				Characteristic			
	A	B	C	D	A	B	C	D	A	B	C	D
0.3 A	–	–	5SY4114-7	5SY4114-8	–	–	5SY4514-7	5SY4514-8	–	–	5SY4214-7	5SY4214-8
0.5 A	5SY4105-5	–	5SY4105-7	5SY4105-8	–	–	5SY4505-7	5SY4505-8	5SY4205-5	–	5SY4205-7	5SY4205-8
1 A	5SY4101-5	5SY4101-6	5SY4101-7	5SY4101-8	5SY4501-5	–	5SY4501-7	5SY4501-8	5SY4201-5	5SY4201-6	5SY4201-7	5SY4201-8
1.6 A	5SY4115-5	5SY4115-6	5SY4115-7	5SY4115-8	5SY4515-5	5SY4515-6	5SY4515-7	5SY4515-8	5SY4215-5	5SY4215-6	5SY4215-7	5SY4215-8
2 A	5SY4102-5	5SY4102-6	5SY4102-7	5SY4102-8	5SY4502-5	–	5SY4502-7	5SY4502-8	5SY4202-5	5SY4202-6	5SY4202-7	5SY4202-8
3 A	5SY4103-5	5SY4103-6	5SY4103-7	5SY4103-8	5SY4503-5	–	5SY4503-7	5SY4503-8	5SY4203-5	5SY4203-6	5SY4203-7	5SY4203-8
4 A	5SY4104-5	5SY4104-6	5SY4104-7	5SY4104-8	5SY4504-5	5SY4504-6	5SY4504-7	5SY4504-8	5SY4204-5	5SY4204-6	5SY4204-7	5SY4204-8
5 A	–	–	5SY4111-7	–	–	–	–	–	–	–	5SY4211-7	–
6 A	5SY4106-5	5SY4106-6	5SY4106-7	5SY4106-8	5SY4506-5	5SY4506-6	5SY4506-7	5SY4506-8	5SY4206-5	5SY4206-6	5SY4206-7	5SY4206-8
8 A	5SY4108-5	5SY4108-6	5SY4108-7	5SY4108-8	5SY4508-5	–	5SY4508-7	5SY4508-8	5SY4208-5	5SY4208-6	5SY4208-7	5SY4208-8
10 A	5SY4110-5	5SY4110-6	5SY4110-7	5SY4110-8	5SY4510-5	5SY4510-6	5SY4510-7	5SY4510-8	5SY4210-5	5SY4210-6	5SY4210-7	5SY4210-8
13 A	5SY4113-5	5SY4113-6	5SY4113-7	5SY4113-8	5SY4513-5	5SY4513-6	5SY4513-7	5SY4513-8	5SY4213-5	5SY4213-6	5SY4213-7	5SY4213-8
15 A	–	–	5SY4118-7	–	–	–	–	–	–	–	5SY4218-7	–
16 A	5SY4116-5	5SY4116-6	5SY4116-7	5SY4116-8	5SY4516-5	5SY4516-6	5SY4516-7	5SY4516-8	5SY4216-5	5SY4216-6	5SY4216-7	5SY4216-8
20 A	5SY4120-5	5SY4120-6	5SY4120-7	5SY4120-8	5SY4520-5	5SY4520-6	5SY4520-7	5SY4520-8	5SY4220-5	5SY4220-6	5SY4220-7	5SY4220-8
25 A	5SY4125-5	5SY4125-6	5SY4125-7	5SY4125-8	5SY4525-5	5SY4525-6	5SY4525-7	5SY4525-8	5SY4225-5	5SY4225-6	5SY4225-7	5SY4225-8
30 A	–	–	5SY4130-7	–	–	–	–	–	–	–	5SY4230-7	–
32 A	5SY4132-5	5SY4132-6	5SY4132-7	5SY4132-8	5SY4532-5	5SY4532-6	5SY4532-7	5SY4532-8	5SY4232-5	5SY4232-6	5SY4232-7	5SY4232-8
35 A	–	–	5SY4135-7	–	–	–	–	–	–	–	5SY4235-7	–
40 A	5SY4140-5	5SY4140-6	5SY4140-7	5SY4140-8	5SY4540-5	5SY4540-6	5SY4540-7	5SY4540-8	5SY4240-5	5SY4240-6	5SY4240-7	5SY4240-8
45 A	–	–	5SY4145-7	–	–	–	–	–	–	–	5SY4245-7	–
50 A	5SY4150-5	5SY4150-6	5SY4150-7	5SY4150-8	5SY4550-5	5SY4550-6	5SY4550-7	5SY4550-8	5SY4250-5	5SY4250-6	5SY4250-7	5SY4250-8
60 A	–	–	5SY4160-7	–	–	–	–	–	–	–	5SY4260-7	–
63 A	5SY4163-5	5SY4163-6	5SY4163-7	5SY4163-8	5SY4563-5	5SY4563-6	5SY4563-7	5SY4563-8	5SY4263-5	5SY4263-6	5SY4263-7	5SY4263-8
80 A	–	5SY4180-6	5SY4180-7	–	–	–	5SY4580-7	–	–	5SY4280-6	5SY4280-7	–

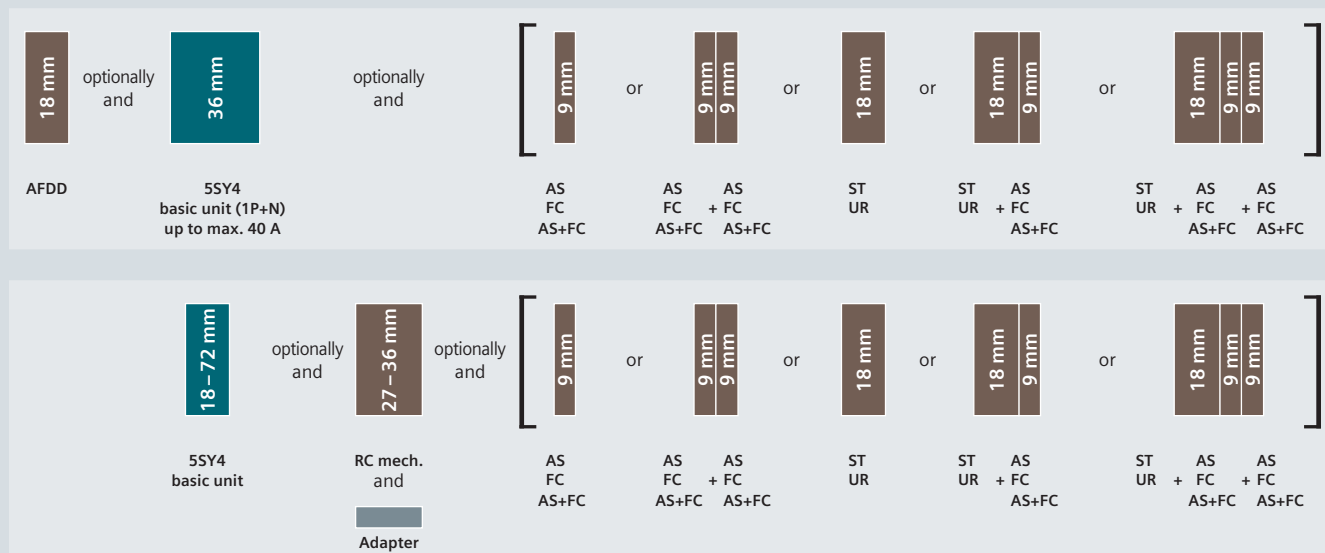Mounting concept





3

3P 400 V AC 3 MW				3P+N 400 V AC 4 MW				4P 400 V AC 4 MW			
Characteristic				Characteristic				Characteristic			
A	B	C	D	A	B	C	D	A	B	C	D
–	–	5SY4314-7	5SY4314-8	–	–	5SY4614-7	5SY4614-8	–	–	5SY4414-7	5SY4414-8
5SY4305-5	–	5SY4305-7	5SY4305-8	–	–	5SY4605-7	5SY4605-8	–	–	5SY4405-7	5SY4405-8
5SY4301-5	5SY4301-6	5SY4301-7	5SY4301-8	5SY4601-5	–	5SY4601-7	5SY4601-8	5SY4401-5	–	5SY4401-7	5SY4401-8
5SY4315-5	5SY4315-6	5SY4315-7	5SY4315-8	5SY4615-5	–	5SY4615-7	5SY4615-8	5SY4415-5	–	5SY4415-7	5SY4415-8
5SY4302-5	5SY4302-6	5SY4302-7	5SY4302-8	5SY4602-5	–	5SY4602-7	5SY4602-8	5SY4402-5	–	5SY4402-7	5SY4402-8
5SY4303-5	5SY4303-6	5SY4303-7	5SY4303-8	5SY4603-5	–	5SY4603-7	5SY4603-8	5SY4403-5	–	5SY4403-7	5SY4403-8
5SY4304-5	5SY4304-6	5SY4304-7	5SY4304-8	5SY4604-5	–	5SY4604-7	5SY4604-8	5SY4404-5	–	5SY4404-7	5SY4404-8
–	–	5SY4311-7	–	–	–	–	–	–	–	–	–
5SY4306-5	5SY4306-6	5SY4306-7	5SY4306-8	5SY4606-5	5SY4606-6	5SY4606-7	5SY4606-8	5SY4406-5	5SY4406-6	5SY4406-7	5SY4406-8
5SY4308-5	5SY4308-6	5SY4308-7	5SY4308-8	5SY4608-5	–	5SY4608-7	5SY4608-8	5SY4408-5	–	5SY4408-7	5SY4408-8
5SY4310-5	5SY4310-6	5SY4310-7	5SY4310-8	5SY4610-5	5SY4610-6	5SY4610-7	5SY4610-8	5SY4410-5	5SY4410-6	5SY4410-7	5SY4410-8
5SY4313-5	5SY4313-6	5SY4313-7	5SY4313-8	5SY4613-5	5SY4613-6	5SY4613-7	5SY4613-8	5SY4413-5	5SY4413-6	5SY4413-7	5SY4413-8
–	–	5SY4318-7	–	–	–	–	–	–	–	–	–
5SY4316-5	5SY4316-6	5SY4316-7	5SY4316-8	5SY4616-5	5SY4616-6	5SY4616-7	5SY4616-8	5SY4416-5	5SY4416-6	5SY4416-7	5SY4416-8
5SY4320-5	5SY4320-6	5SY4320-7	5SY4320-8	5SY4620-5	5SY4620-6	5SY4620-7	5SY4620-8	5SY4420-5	5SY4420-6	5SY4420-7	5SY4420-8
5SY4325-5	5SY4325-6	5SY4325-7	5SY4325-8	5SY4625-5	5SY4625-6	5SY4625-7	5SY4625-8	5SY4425-5	5SY4425-6	5SY4425-7	5SY4425-8
–	–	5SY4330-7	–	–	–	–	–	–	–	–	–
5SY4332-5	5SY4332-6	5SY4332-7	5SY4332-8	5SY4632-5	5SY4632-6	5SY4632-7	5SY4632-8	5SY4432-5	5SY4432-6	5SY4432-7	5SY4432-8
–	–	5SY4335-7	–	–	–	–	–	–	–	–	–
5SY4340-5	5SY4340-6	5SY4340-7	5SY4340-8	5SY4640-5	5SY4640-6	5SY4640-7	5SY4640-8	5SY4440-5	5SY4440-6	5SY4440-7	5SY4440-8
–	–	5SY4345-7	–	–	–	–	–	–	–	–	–
5SY4350-5	5SY4350-6	5SY4350-7	5SY4350-8	5SY4650-5	5SY4650-6	5SY4650-7	5SY4650-8	5SY4450-5	5SY4450-6	5SY4450-7	5SY4450-8
–	–	5SY4360-7	–	–	–	–	–	–	–	–	–
5SY4363-5	5SY4363-6	5SY4363-7	5SY4363-8	5SY4663-5	5SY4663-6	5SY4663-7	5SY4663-8	5SY4463-5	5SY4463-6	5SY4463-7	5SY4463-8
–	5SY4380-6	5SY4380-7	–	–	–	5SY4680-7	–	–	5SY4480-6	5SY4480-7	–

Accessories


Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 CO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Arc fault detection units (AFDD)		Article No.
For basic units 1P+N	I _n up to 16 A	5SM6021-2
	(2 MW) I _n up to 40 A	5SM6024-2
Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2

5SP4 miniature circuit breakers

10 kA

Mounting width	1P 230/400 V AC			2P 400 V AC		
	1.5 MW			3 MW		
						
Rated current I _n	Characteristic			Characteristic		
	B	C	D	B	C	D
80 A	5SP4180-6	5SP4180-7	5SP4180-8	5SP4280-6	5SP4280-7	5SP4280-8
100 A	5SP4191-6	5SP4191-7	5SP4191-8	5SP4291-6	5SP4291-7	5SP4291-8
125 A	5SP4192-6	5SP4192-7	–	5SP4292-6	5SP4292-7	–

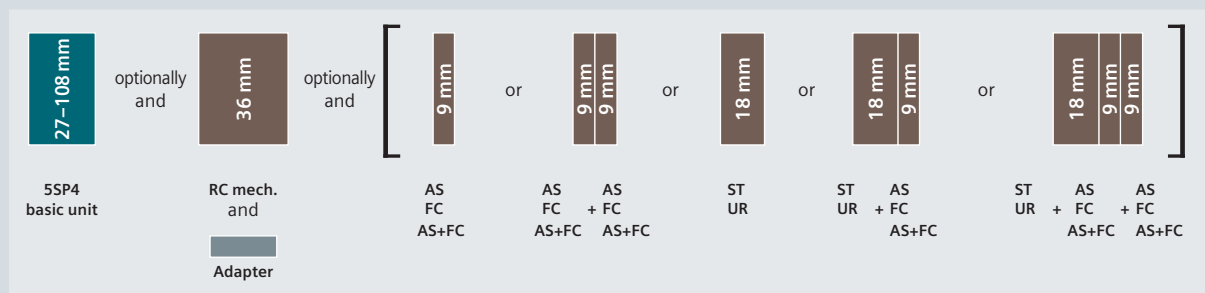Mounting concept




AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 ST Shunt trips
 UR Undervoltage releases
 RC mech. Remote controlled mechanisms

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/52](#)
[See page 3/53](#)
[See page 3/54](#)




3P
400 V AC

4.5 MW



4P
400 V AC

6 MW



Characteristic

B	C	D
5SP4380-6	5SP4380-7	5SP4380-8
5SP4391-6	5SP4391-7	5SP4391-8
5SP4392-6	5SP4392-7	–

Characteristic

B	C	D
5SP4480-6	5SP4480-7	5SP4480-8
5SP4491-6	5SP4491-7	5SP4491-8
5SP4492-6	5SP4492-7	–

3

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1.5 MW		5ST3820-1
3–6 MW		5ST3820-2

5SY5 miniature circuit breakers

10 kA

	1P 230/400 V AC, 220 V DC	2P 400 V AC, 440 V DC	4P 400 V AC, 880 V DC			
Mounting width	1 MW 	2 MW 	4 MW 			
Rated current I _n	Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C
0.3 A	–	5SY5114-7	–	5SY5214-7	–	5SY5414-7
0.5 A	–	5SY5105-7	–	5SY5205-7	–	5SY5405-7
1 A	–	5SY5101-7	–	5SY5201-7	–	5SY5401-7
1.6 A	–	5SY5115-7	–	5SY5215-7	–	5SY5415-7
2 A	5SY5102-6	5SY5102-7	5SY5202-6	5SY5202-7	–	5SY5402-7
3 A	–	5SY5103-7	–	5SY5203-7	–	5SY5403-7
4 A	5SY5104-6	5SY5104-7	5SY5204-6	5SY5204-7	–	5SY5404-7
6 A	5SY5106-6	5SY5106-7	5SY5206-6	5SY5206-7	5SY5406-6	5SY5406-7
8 A	5SY5108-6	5SY5108-7	5SY5208-6	5SY5208-7	–	5SY5408-7
10 A	5SY5110-6	5SY5110-7	5SY5210-6	5SY5210-7	5SY5410-6	5SY5410-7
13 A	5SY5113-6	5SY5113-7	5SY5213-6	5SY5213-7	5SY5413-6	5SY5413-7
16 A	5SY5116-6	5SY5116-7	5SY5216-6	5SY5216-7	5SY5416-6	5SY5416-7
20 A	5SY5120-6	5SY5120-7	5SY5220-6	5SY5220-7	5SY5420-6	5SY5420-7
25 A	5SY5125-6	5SY5125-7	5SY5225-6	5SY5225-7	5SY5425-6	5SY5425-7
32 A	5SY5132-6	5SY5132-7	5SY5232-6	5SY5232-7	5SY5432-6	5SY5432-7
40 A	5SY5140-6	5SY5140-7	5SY5240-6	5SY5240-7	5SY5440-6	5SY5440-7
50 A	5SY5150-6	5SY5150-7	5SY5250-6	5SY5250-7	5SY5450-6	5SY5450-7
63 A	5SY5163-6	5SY5163-7	5SY5263-6	5SY5263-7	5SY5463-6	5SY5463-7

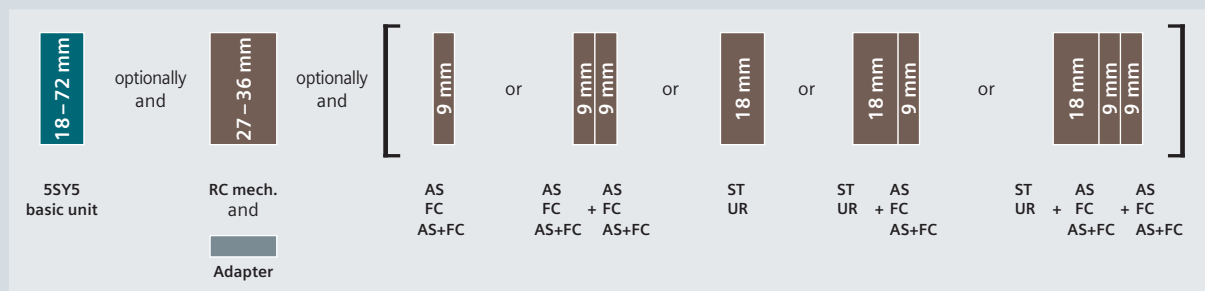Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 AS+FC Auxiliary switches and fault signal contacts
 ST Shunt trips
 UR Undervoltage releases
 RC mech. Remote controlled mechanisms

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/52](#)
[See page 3/53](#)
[See page 3/54](#)



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
4 MW		5ST3820-2

5SY7 miniature circuit breakers

15 kA

Mounting width	Rated current I_n	Main MCB, line side of meter	1P 230/400 V AC			1P+N 230 V AC			2P 400 V AC		
			1 MW			2 MW			2 MW		
			Characteristic			Characteristic			Characteristic		
			B	C	D	B	C	D	B	C	D
0.3 A	–	–	–	5SY7114-7	5SY7114-8	–	5SY7514-7	5SY7514-8	–	5SY7214-7	5SY7214-8
0.5 A	–	–	–	5SY7105-7	5SY7105-8	–	5SY7505-7	5SY7505-8	–	5SY7205-7	5SY7205-8
1 A	–	–	–	5SY7101-7	5SY7101-8	–	5SY7501-7	5SY7501-8	–	5SY7201-7	5SY7201-8
1.6 A	–	–	–	5SY7115-7	5SY7115-8	–	5SY7515-7	5SY7515-8	–	5SY7215-7	5SY7215-8
2 A	–	–	–	5SY7102-7	5SY7102-8	–	5SY7502-7	5SY7502-8	–	5SY7202-7	5SY7202-8
3 A	–	–	–	5SY7103-7	5SY7103-8	–	5SY7503-7	5SY7503-8	–	5SY7203-7	5SY7203-8
4 A	–	–	–	5SY7104-7	5SY7104-8	–	5SY7504-7	5SY7504-8	–	5SY7204-7	5SY7204-8
6 A	–	–	5SY7106-6	5SY7106-7	5SY7106-8	5SY7506-6	5SY7506-7	5SY7506-8	5SY7206-6	5SY7206-7	5SY7206-8
	■	–	5SY7106-6KK13	–	–	–	–	–	–	–	–
8 A	–	–	–	5SY7108-7	5SY7108-8	–	5SY7508-7	5SY7508-8	–	5SY7208-7	5SY7208-8
10 A	–	–	5SY7110-6	5SY7110-7	5SY7110-8	5SY7510-6	5SY7510-7	5SY7510-8	5SY7210-6	5SY7210-7	5SY7210-8
	■	–	5SY7110-6KK13	–	–	–	–	–	–	–	–
13 A	–	–	5SY7113-6	5SY7113-7	5SY7113-8	5SY7513-6	5SY7513-7	5SY7513-8	5SY7213-6	5SY7213-7	5SY7213-8
16 A	–	–	5SY7116-6	5SY7116-7	5SY7116-8	5SY7516-6	5SY7516-7	5SY7516-8	5SY7216-6	5SY7216-7	5SY7216-8
20 A	–	–	5SY7120-6	5SY7120-7	5SY7120-8	5SY7520-6	5SY7520-7	5SY7520-8	5SY7220-6	5SY7220-7	5SY7220-8
25 A	–	–	5SY7125-6	5SY7125-7	5SY7125-8	5SY7525-6	5SY7525-7	5SY7525-8	5SY7225-6	5SY7225-7	5SY7225-8
32 A	–	–	5SY7132-6	5SY7132-7	5SY7132-8	5SY7532-6	5SY7532-7	5SY7532-8	5SY7232-6	5SY7232-7	5SY7232-8
40 A	–	–	5SY7140-6	5SY7140-7	5SY7140-8	5SY7540-6	5SY7540-7	5SY7540-8	5SY7240-6	5SY7240-7	5SY7240-8
50 A	–	–	5SY7150-6	5SY7150-7	5SY7150-8	5SY7550-6	5SY7550-7	5SY7550-8	5SY7250-6	5SY7250-7	5SY7250-8
63 A	–	–	5SY7163-6	5SY7163-7	5SY7163-8	5SY7563-6	5SY7563-7	5SY7563-8	5SY7263-6	5SY7263-7	5SY7263-8

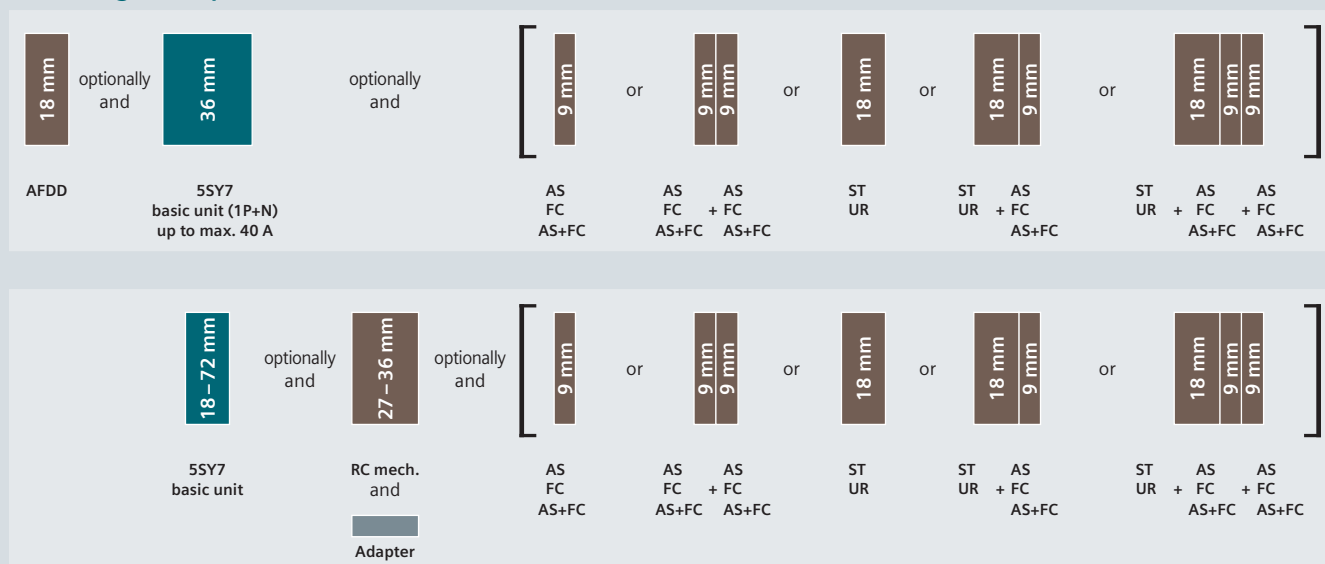Mounting concept



AFDD Arc fault detection units
 AS Auxiliary switches
 FC Fault signal contacts

[See page 3/55](#)
[See page 3/46](#)
[See page 3/48](#)

AS+FC Auxiliary switches and
 fault signal contacts
 ST Shunt trips

[See page 3/49](#)
[See page 3/52](#)

UR Undervoltage releases
 RC mech. Remote controlled mechanisms

[See page 3/53](#)
[See page 3/54](#)



3

3P 400 V AC 3 MW			3P+N 400 V AC 4 MW			4P 400 V AC 4 MW		
Characteristic			Characteristic			Characteristic		
B	C	D	B	C	D	B	C	D
–	5SY7314-7	5SY7314-8	–	5SY7614-7	5SY7614-8	–	5SY7414-7	5SY7414-8
–	5SY7305-7	5SY7305-8	–	5SY7605-7	5SY7605-8	–	5SY7405-7	5SY7405-8
–	5SY7301-7	5SY7301-8	–	5SY7601-7	5SY7601-8	–	5SY7401-7	5SY7401-8
–	5SY7315-7	5SY7315-8	–	5SY7615-7	5SY7615-8	–	5SY7415-7	5SY7415-8
–	5SY7302-7	5SY7302-8	–	5SY7602-7	5SY7602-8	–	5SY7402-7	5SY7402-8
–	5SY7303-7	5SY7303-8	–	5SY7603-7	5SY7603-8	–	5SY7403-7	5SY7403-8
–	5SY7304-7	5SY7304-8	–	5SY7604-7	5SY7604-8	–	5SY7404-7	5SY7404-8
5SY7306-6	5SY7306-7	5SY7306-8	5SY7606-6	5SY7606-7	5SY7606-8	5SY7406-6	5SY7406-7	5SY7406-8
–	–	–	–	–	–	–	–	–
–	5SY7308-7	5SY7308-8	–	5SY7608-7	5SY7608-8	–	5SY7408-7	5SY7408-8
5SY7310-6	5SY7310-7	5SY7310-8	5SY7610-6	5SY7610-7	5SY7610-8	5SY7410-6	5SY7410-7	5SY7410-8
–	–	–	–	–	–	–	–	–
5SY7313-6	5SY7313-7	5SY7313-8	5SY7613-6	5SY7613-7	5SY7613-8	5SY7413-6	5SY7413-7	5SY7413-8
5SY7316-6	5SY7316-7	5SY7316-8	5SY7616-6	5SY7616-7	5SY7616-8	5SY7416-6	5SY7416-7	5SY7416-8
5SY7320-6	5SY7320-7	5SY7320-8	5SY7620-6	5SY7620-7	5SY7620-8	5SY7420-6	5SY7420-7	5SY7420-8
5SY7325-6	5SY7325-7	5SY7325-8	5SY7625-6	5SY7625-7	5SY7625-8	5SY7425-6	5SY7425-7	5SY7425-8
5SY7332-6	5SY7332-7	5SY7332-8	5SY7632-6	5SY7632-7	5SY7632-8	5SY7432-6	5SY7432-7	5SY7432-8
5SY7340-6	5SY7340-7	5SY7340-8	5SY7640-6	5SY7640-7	5SY7640-8	5SY7440-6	5SY7440-7	5SY7440-8
5SY7350-6	5SY7350-7	5SY7350-8	5SY7650-6	5SY7650-7	5SY7650-8	5SY7450-6	5SY7450-7	5SY7450-8
5SY7363-6	5SY7363-7	5SY7363-8	5SY7663-6	5SY7663-7	5SY7663-8	5SY7463-6	5SY7463-7	5SY7463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2
Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (2 MW)	I _n up to 16 A	5SM6021-2
	I _n up to 40 A	5SM6024-2


5SY8 miniature circuit breakers

25 kA

3

Mounting width	1P 230/400 V AC		1P+N 230 V AC		2P 400 V AC		3P 400 V AC	
	1 MW		2 MW		2 MW		3 MW	
Rated current I _n	Characteristic		Characteristic		Characteristic		Characteristic	
	C	D	C	D	C	D	C	D
0.3 A	5SY8114-7	5SY8114-8	5SY8514-7	5SY8514-8	5SY8214-7	5SY8214-8	5SY8314-7	5SY8314-8
0.5 A	5SY8105-7	5SY8105-8	5SY8505-7	5SY8505-8	5SY8205-7	5SY8205-8	5SY8305-7	5SY8305-8
1 A	5SY8101-7	5SY8101-8	5SY8501-7	5SY8501-8	5SY8201-7	5SY8201-8	5SY8301-7	5SY8301-8
1.6 A	5SY8115-7	5SY8115-8	5SY8515-7	5SY8515-8	5SY8215-7	5SY8215-8	5SY8315-7	5SY8315-8
2 A	5SY8102-7	5SY8102-8	5SY8502-7	5SY8502-8	5SY8202-7	5SY8202-8	5SY8302-7	5SY8302-8
3 A	5SY8103-7	5SY8103-8	5SY8503-7	5SY8503-8	5SY8203-7	5SY8203-8	5SY8303-7	5SY8303-8
4 A	5SY8104-7	5SY8104-8	5SY8504-7	5SY8504-8	5SY8204-7	5SY8204-8	5SY8304-7	5SY8304-8
6 A	5SY8106-7	5SY8106-8	5SY8506-7	5SY8506-8	5SY8206-7	5SY8206-8	5SY8306-7	5SY8306-8
8 A	5SY8108-7	5SY8108-8	5SY8508-7	5SY8508-8	5SY8208-7	5SY8208-8	5SY8308-7	5SY8308-8
10 A	5SY8110-7	5SY8110-8	5SY8510-7	5SY8510-8	5SY8210-7	5SY8210-8	5SY8310-7	5SY8310-8
12.5 A	–	–	–	–	–	–	–	–
13 A	5SY8113-7	5SY8113-8	5SY8513-7	5SY8513-8	5SY8213-7	5SY8213-8	5SY8313-7	5SY8313-8
16 A	5SY8116-7	5SY8116-8	5SY8516-7	5SY8516-8	5SY8216-7	5SY8216-8	5SY8316-7	5SY8316-8
20 A	5SY8120-7	5SY8120-8	5SY8520-7	5SY8520-8	5SY8220-7	5SY8220-8	5SY8320-7	5SY8320-8
25 A	5SY8125-7	5SY8125-8	5SY8525-7	5SY8525-8	5SY8225-7	5SY8225-8	5SY8325-7	5SY8325-8
32 A	5SY8132-7	5SY8132-8	5SY8532-7	5SY8532-8	5SY8232-7	5SY8232-8	5SY8332-7	5SY8332-8
40 A	5SY8140-7	5SY8140-8	5SY8540-7	5SY8540-8	5SY8240-7	5SY8240-8	5SY8340-7	5SY8340-8
50 A	5SY8150-7	5SY8150-8	5SY8550-7	5SY8550-8	5SY8250-7	5SY8250-8	5SY8350-7	5SY8350-8
63 A	5SY8163-7	5SY8163-8	5SY8563-7	5SY8563-8	5SY8263-7	5SY8263-8	5SY8363-7	5SY8363-8

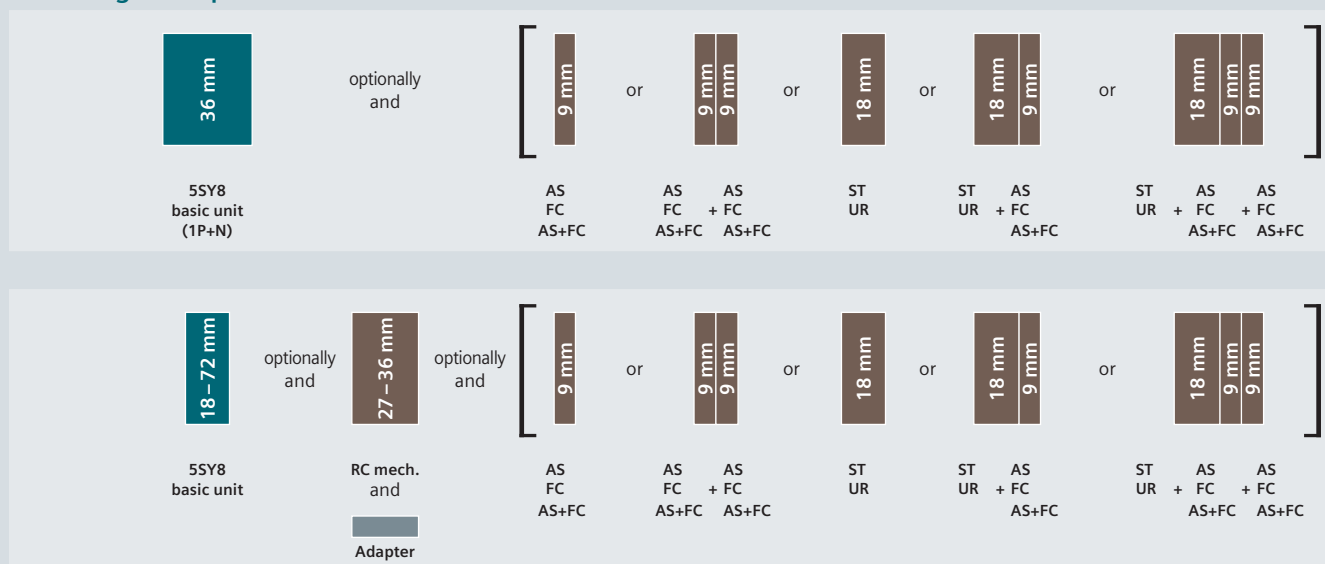Mounting concept



AFDD Arc fault detection units

[See page 3/55](#)

AS Auxiliary switches

[See page 3/46](#)

FC Fault signal contacts

[See page 3/48](#)

AS+FC Auxiliary switches and

fault signal contacts

ST

Shunt trips

[See page 3/49](#)[See page 3/52](#)

UR

Undervoltage releases

[See page 3/53](#)

RC mech. Remote controlled mechanisms

[See page 3/54](#)



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
C	D	C	D
5SY8614-7	5SY8614-8	5SY8414-7	5SY8414-8
5SY8605-7	5SY8605-8	5SY8405-7	5SY8405-8
5SY8601-7	5SY8601-8	5SY8401-7	5SY8401-8
5SY8615-7	5SY8615-8	5SY8415-7	5SY8415-8
5SY8602-7	5SY8602-8	5SY8402-7	5SY8402-8
5SY8603-7	5SY8603-8	5SY8403-7	5SY8403-8
5SY8604-7	5SY8604-8	5SY8404-7	5SY8404-8
5SY8606-7	5SY8606-8	5SY8406-7	5SY8406-8
5SY8608-7	5SY8608-8	5SY8408-7	5SY8408-8
5SY8610-7	5SY8610-8	5SY8410-7	5SY8410-8
–	–	–	–
5SY8613-7	5SY8613-8	5SY8413-7	5SY8413-8
5SY8616-7	5SY8616-8	5SY8416-7	5SY8416-8
5SY8620-7	5SY8620-8	5SY8420-7	5SY8420-8
5SY8625-7	5SY8625-8	5SY8425-7	5SY8425-8
5SY8632-7	5SY8632-8	5SY8432-7	5SY8432-8
5SY8640-7	5SY8640-8	5SY8440-7	5SY8440-8
5SY8650-7	5SY8650-8	5SY8450-7	5SY8450-8
5SY8663-7	5SY8663-8	5SY8463-7	5SY8463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1–2 MW		5ST3820-1
3–4 MW		5ST3820-2

5SJ4..HG.. miniature circuit breakers

According to UL489, 14/10 kA

Mounting width	1P "same polarity only"			1P			
	240 V AC	240 V AC	240 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
1 MW							
Rated current I _n	Characteristic B	Characteristic C	Characteristic D	Characteristic C	Characteristic C	Characteristic D	Characteristic D
0.3 A	–	5SJ4114-7HG40	5SJ4114-8HG40	5SJ4114-7HG41	5SJ4114-7HG42	5SJ4114-8HG41	5SJ4114-8HG42
0.5 A	–	5SJ4105-7HG40	5SJ4105-8HG40	5SJ4105-7HG41	5SJ4105-7HG42	5SJ4105-8HG41	5SJ4105-8HG42
1 A	–	5SJ4101-7HG40	5SJ4101-8HG40	5SJ4101-7HG41	5SJ4101-7HG42	5SJ4101-8HG41	5SJ4101-8HG42
1.6 A	–	5SJ4115-7HG40	5SJ4115-8HG40	5SJ4115-7HG41	5SJ4115-7HG42	5SJ4115-8HG41	5SJ4115-8HG42
2 A	–	5SJ4102-7HG40	5SJ4102-8HG40	5SJ4102-7HG41	5SJ4102-7HG42	5SJ4102-8HG41	5SJ4102-8HG42
3 A	–	5SJ4103-7HG40	5SJ4103-8HG40	5SJ4103-7HG41	5SJ4103-7HG42	5SJ4103-8HG41	5SJ4103-8HG42
4 A	–	5SJ4104-7HG40	5SJ4104-8HG40	5SJ4104-7HG41	5SJ4104-7HG42	5SJ4104-8HG41	5SJ4104-8HG42
5 A	–	5SJ4111-7HG40	5SJ4111-8HG40	5SJ4111-7HG41	5SJ4111-7HG42	5SJ4111-8HG41	5SJ4111-8HG42
6 A	5SJ4106-6HG40	5SJ4106-7HG40	5SJ4106-8HG40	5SJ4106-7HG41	5SJ4106-7HG42	5SJ4106-8HG41	5SJ4106-8HG42
8 A	–	5SJ4108-7HG40	5SJ4108-8HG40	5SJ4108-7HG41	5SJ4108-7HG42	5SJ4108-8HG41	5SJ4108-8HG42
10 A	5SJ4110-6HG40	5SJ4110-7HG40	5SJ4110-8HG40	5SJ4110-7HG41	5SJ4110-7HG42	5SJ4110-8HG41	5SJ4110-8HG42
13 A	5SJ4113-6HG40	5SJ4113-7HG40	5SJ4113-8HG40	5SJ4113-7HG41	5SJ4113-7HG42	5SJ4113-8HG41	5SJ4113-8HG42
15 A	5SJ4118-6HG40	5SJ4118-7HG40	5SJ4118-8HG40	5SJ4118-7HG41	5SJ4118-7HG42	5SJ4118-8HG41	5SJ4118-8HG42
16 A	5SJ4116-6HG40	5SJ4116-7HG40	5SJ4116-8HG40	5SJ4116-7HG41	5SJ4116-7HG42	5SJ4116-8HG41	5SJ4116-8HG42
20 A	5SJ4120-6HG40	5SJ4120-7HG40	5SJ4120-8HG40	5SJ4120-7HG41	5SJ4120-7HG42	5SJ4120-8HG41	5SJ4120-8HG42
25 A	5SJ4125-6HG40	5SJ4125-7HG40	5SJ4125-8HG40	5SJ4125-7HG41	5SJ4125-7HG42	5SJ4125-8HG41	5SJ4125-8HG42
30 A	5SJ4130-6HG40	5SJ4130-7HG40	5SJ4130-8HG40	5SJ4130-7HG41	5SJ4130-7HG42	5SJ4130-8HG41	5SJ4130-8HG42
32 A	5SJ4132-6HG40	5SJ4132-7HG40	5SJ4132-8HG40	5SJ4132-7HG41	5SJ4132-7HG42	5SJ4132-8HG41	5SJ4132-8HG42
35 A	5SJ4135-6HG40	5SJ4135-7HG40	5SJ4135-8HG40	5SJ4135-7HG41	5SJ4135-7HG42	5SJ4135-8HG41	–
40 A	5SJ4140-6HG40	5SJ4140-7HG40	5SJ4140-8HG40	5SJ4140-7HG41	5SJ4140-7HG42	5SJ4140-8HG41	–
45 A	5SJ4145-6HG40	5SJ4145-7HG40	5SJ4145-8HG40	5SJ4145-7HG41	–	5SJ4145-8HG41	–
50 A	5SJ4150-6HG40	5SJ4150-7HG40	5SJ4150-8HG40	5SJ4150-7HG41	–	5SJ4150-8HG41	–
60 A	5SJ4160-6HG40	5SJ4160-7HG40	5SJ4160-8HG40	5SJ4160-7HG41	–	5SJ4160-8HG41	–
63 A	5SJ4163-6HG40	5SJ4163-7HG40	5SJ4163-8HG40	5SJ4163-7HG41	–	5SJ4163-8HG41	–

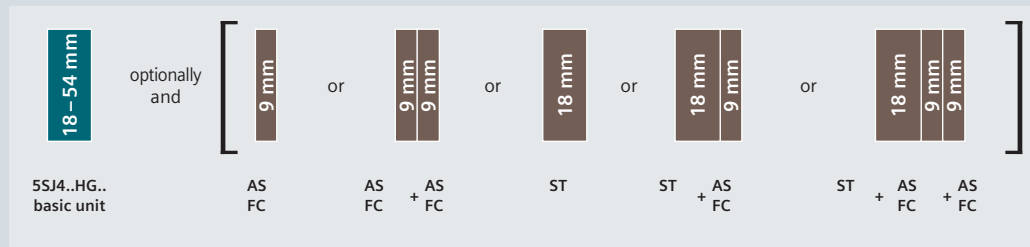Mounting concept



AS Auxiliary switches
 FC Fault signal contacts
 ST Shunt trips

[See page 3/46](#)
[See page 3/48](#)
[See page 3/52](#)




2P				3P			
240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
2 MW				3 MW			
Characteristic				Characteristic			
C	C	D	D	C	C	D	D
5SJ4214-7HG41	5SJ4214-7HG42	5SJ4214-8HG41	5SJ4214-8HG42	5SJ4314-7HG41	5SJ4314-7HG42	5SJ4314-8HG41	5SJ4314-8HG42
5SJ4205-7HG41	5SJ4205-7HG42	5SJ4205-8HG41	5SJ4205-8HG42	5SJ4305-7HG41	5SJ4305-7HG42	5SJ4305-8HG41	5SJ4305-8HG42
5SJ4201-7HG41	5SJ4201-7HG42	5SJ4201-8HG41	5SJ4201-8HG42	5SJ4301-7HG41	5SJ4301-7HG42	5SJ4301-8HG41	5SJ4301-8HG42
5SJ4215-7HG41	5SJ4215-7HG42	5SJ4215-8HG41	5SJ4215-8HG42	5SJ4315-7HG41	5SJ4315-7HG42	5SJ4315-8HG41	5SJ4315-8HG42
5SJ4202-7HG41	5SJ4202-7HG42	5SJ4202-8HG41	5SJ4202-8HG42	5SJ4302-7HG41	5SJ4302-7HG42	5SJ4302-8HG41	5SJ4302-8HG42
5SJ4203-7HG41	5SJ4203-7HG42	5SJ4203-8HG41	5SJ4203-8HG42	5SJ4303-7HG41	5SJ4303-7HG42	5SJ4303-8HG41	5SJ4303-8HG42
5SJ4204-7HG41	5SJ4204-7HG42	5SJ4204-8HG41	5SJ4204-8HG42	5SJ4304-7HG41	5SJ4304-7HG42	5SJ4304-8HG41	5SJ4304-8HG42
5SJ4211-7HG41	5SJ4211-7HG42	5SJ4211-8HG41	5SJ4211-8HG42	5SJ4311-7HG41	5SJ4311-7HG42	5SJ4311-8HG41	5SJ4311-8HG42
5SJ4206-7HG41	5SJ4206-7HG42	5SJ4206-8HG41	5SJ4206-8HG42	5SJ4306-7HG41	5SJ4306-7HG42	5SJ4306-8HG41	5SJ4306-8HG42
5SJ4208-7HG41	5SJ4208-7HG42	5SJ4208-8HG41	5SJ4208-8HG42	5SJ4308-7HG41	5SJ4308-7HG42	5SJ4308-8HG41	5SJ4308-8HG42
5SJ4210-7HG41	5SJ4210-7HG42	5SJ4210-8HG41	5SJ4210-8HG42	5SJ4310-7HG41	5SJ4310-7HG42	5SJ4310-8HG41	5SJ4310-8HG42
5SJ4213-7HG41	5SJ4213-7HG42	5SJ4213-8HG41	5SJ4213-8HG42	5SJ4313-7HG41	5SJ4313-7HG42	5SJ4313-8HG41	5SJ4313-8HG42
5SJ4218-7HG41	5SJ4218-7HG42	5SJ4218-8HG41	5SJ4218-8HG42	5SJ4318-7HG41	5SJ4318-7HG42	5SJ4318-8HG41	5SJ4318-8HG42
5SJ4216-7HG41	5SJ4216-7HG42	5SJ4216-8HG41	5SJ4216-8HG42	5SJ4316-7HG41	5SJ4316-7HG42	5SJ4316-8HG41	5SJ4316-8HG42
5SJ4220-7HG41	5SJ4220-7HG42	5SJ4220-8HG41	5SJ4220-8HG42	5SJ4320-7HG41	5SJ4320-7HG42	5SJ4320-8HG41	5SJ4320-8HG42
5SJ4225-7HG41	5SJ4225-7HG42	5SJ4225-8HG41	5SJ4225-8HG42	5SJ4325-7HG41	5SJ4325-7HG42	5SJ4325-8HG41	5SJ4325-8HG42
5SJ4230-7HG41	5SJ4230-7HG42	5SJ4230-8HG41	5SJ4230-8HG42	5SJ4330-7HG41	5SJ4330-7HG42	5SJ4330-8HG41	5SJ4330-8HG42
5SJ4232-7HG41	5SJ4232-7HG42	5SJ4232-8HG41	5SJ4232-8HG42	5SJ4332-7HG41	5SJ4332-7HG42	5SJ4332-8HG41	5SJ4332-8HG42
5SJ4235-7HG41	5SJ4235-7HG42	5SJ4235-8HG41	–	5SJ4335-7HG41	5SJ4335-7HG42	5SJ4335-8HG41	–
5SJ4240-7HG41	5SJ4240-7HG42	5SJ4240-8HG41	–	5SJ4340-7HG41	5SJ4340-7HG42	5SJ4340-8HG41	–
5SJ4245-7HG41	–	5SJ4245-8HG41	–	5SJ4345-7HG41	–	5SJ4345-8HG41	–
5SJ4250-7HG41	–	5SJ4250-8HG41	–	5SJ4350-7HG41	–	5SJ4350-8HG41	–
5SJ4260-7HG41	–	5SJ4260-8HG41	–	5SJ4360-7HG41	–	5SJ4360-8HG41	–
5SJ4263-7HG41	–	5SJ4263-8HG41	–	5SJ4363-7HG41	–	5SJ4363-8HG41	–

Accessories

Auxiliary switches (AS) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3010-OHG
2 NO	5ST3011-OHG
2 NC	5ST3012-OHG
Fault signal contacts (FC) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3020-OHG
2 NO	5ST3021-OHG
2 NC	5ST3022-OHG
Shunt trips (ST) acc. to UL 489	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030-OHG
24 ... 48 V AC/DC	5ST3031-OHG

5SL6 COM miniature circuit breakers with communication and metering functions **new**

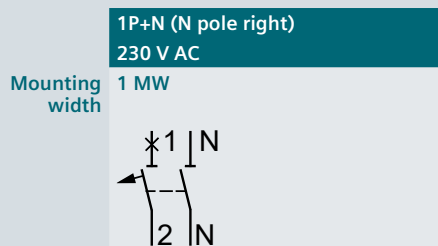1P+N 6 kA compact miniature circuit breakers



Rated current I_n	Characteristic	
	B	C
2 A	5SL6002-6MC	5SL6002-7MC
4 A	5SL6004-6MC	5SL6004-7MC
6 A	5SL6006-6MC	5SL6006-7MC
8 A	–	5SL6008-7MC
10 A	5SL6010-6MC	5SL6010-7MC
13 A	5SL6013-6MC	5SL6013-7MC
16 A	5SL6016-6MC	5SL6016-7MC
20 A	5SL6020-6MC	5SL6020-7MC
25 A	5SL6025-6MC	5SL6025-7MC
32 A	5SL6032-6MC	5SL6032-7MC

Mounting concept



Note:

Please note the country-specific radio licenses of the products in SIOS:
www.siemens.com/lowvoltage/certificates

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC

Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6
Arc fault detection units (AFDD)		Article No.
For basic units 1P + N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2

AFDD Arc fault detection unit
 AS Auxiliary switches
 FC Fault signal contacts

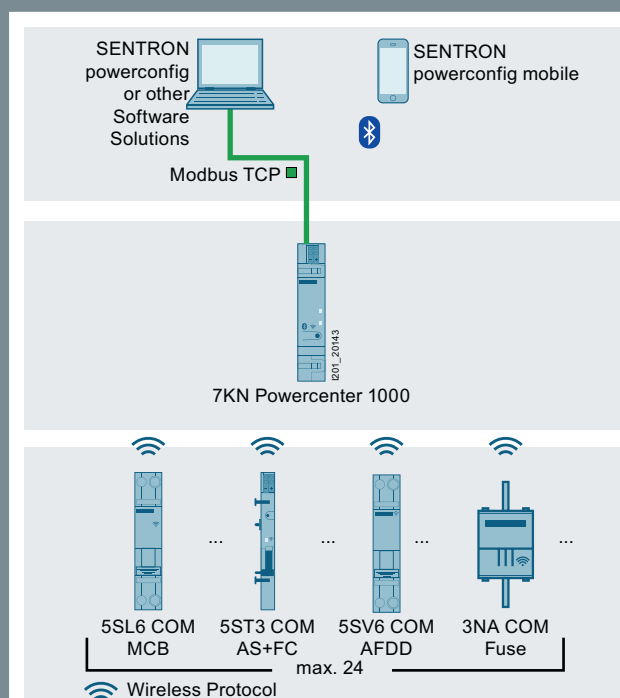
See page 3/55
 See page 3/46
 See page 3/48

AS+FC Auxiliary switches and fault signal contacts
 RC-Mech. Remote controlled mechanisms

See page 3/49
 See page 3/54



7KN Powercenter 1000 data transceiver



- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



See page 10/17

You will find further information under:

Quick Installation Guide – 7KN Powercenter 1000 (109791805)



System Manual – Circuit protection devices with communication and metering function (109791806)



Monitoring functions with limit monitoring

- Trip monitoring
- Counters for:
 - Operating hours
 - Operating hours with load current
 - Operating cycles (ON/OFF)
 - Tripping operations
 - Short circuits
- Limit values for:
 - Overcurrent alarm 1 and alarm 2
 - Undercurrent alarm 1 and alarm 2
 - Temperature

Metering values	Unit	Memory
Temperature	°C	1 hour in 1-minute intervals; 7 days in 15-minute intervals
Average temperature	°C	
Current	A	Min. and max. values over 10 days; 1 hour in 10-second intervals; 7 days in 15-minute intervals
Average current	A	
Maximum current	A	
Voltage	V	Min. and max. values over 10 days
Line frequency	Hz	Min. and max. values over 10 days
Active power	W	Min. and max. values over 10 days
Apparent power	VA	Min. and max. values over 10 days
Reactive power	Var	
Power factor		
Active energy imported	Wh	7 days in 15-minute intervals; 30 days in 1-day intervals
Active energy exported	Wh	
Apparent energy imported	Varh	
Apparent energy exported	Varh	

5SP3 selective main miniature circuit breakers (SHU)






25 kA, mounting on a 40 mm busbar



Mounting width	1P 230/400 V AC				3 × 1P 230/400 V AC
	1.5 MW				4.5 MW
Rated current I_n	Characteristic E				Characteristic E
	L1	L2	L3	L1 + L2 + L3	
16 A	5SP3716-2KK01	5SP3716-2KK02	5SP3716-2KK03	5SP3716-2	5SP3816-2
20 A	5SP3720-2KK01	5SP3720-2KK02	5SP3720-2KK03	5SP3720-2	5SP3820-2
25 A	5SP3725-2KK01	5SP3725-2KK02	5SP3725-2KK03	5SP3725-2	5SP3825-2
35 A	5SP3735-2KK01	5SP3735-2KK02	5SP3735-2KK03	5SP3735-2	5SP3835-2
40 A	5SP3740-2KK01	5SP3740-2KK02	5SP3740-2KK03	5SP3740-2	5SP3840-2
50 A	5SP3750-2KK01	5SP3750-2KK02	5SP3750-2KK03	5SP3750-2	5SP3850-2
63 A	5SP3763-2KK01	5SP3763-2KK02	5SP3763-2KK03	5SP3763-2	5SP3863-2



25 kA, mounting on a mounting rail

	1P 230/400 V AC	3× 1P 230/400 V AC	2P 230/400 V AC	3P 230/400 V AC	4P 230/400 V AC
Mounting width	1.5 MW 	4.5 MW 	3 MW 	4.5 MW 	6 MW 
Rated current I_n	Characteristic E	Characteristic E	Characteristic E	Characteristic E	Characteristic E
16 A	5SP3716-3	5SP3816-3	5SP3216-3	5SP3316-3	5SP3416-3
20 A	5SP3720-3	5SP3820-3	5SP3220-3	5SP3320-3	5SP3420-3
25 A	5SP3725-3	5SP3825-3	5SP3225-3	5SP3325-3	5SP3425-3
35 A	5SP3735-3	5SP3835-3	5SP3235-3	5SP3335-3	5SP3435-3
40 A	5SP3740-3	5SP3840-3	5SP3240-3	5SP3340-3	5SP3440-3
50 A	5SP3750-3	5SP3850-3	5SP3250-3	5SP3350-3	5SP3450-3
63 A	5SP3763-3	5SP3863-3	5SP3263-3	5SP3363-3	5SP3463-3


5SY17 device protection switches

Electromechanical



Mounting width 1 MW (18 mm)

1P+AS
230 V AC/12 ... 72 V DC



Rated current I_n

Characteristic

0.5 A
1 A
2 A
4 A
6 A
8 A
10 A
16 A

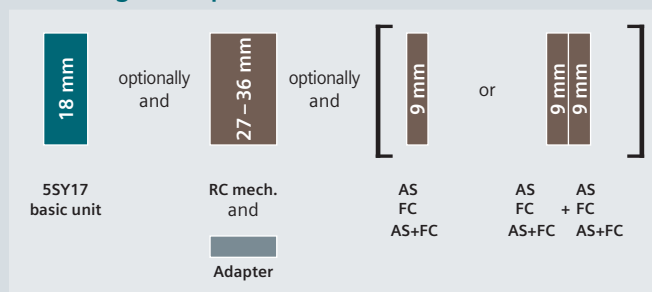
F1 (quick)

F2 (slow)

5SY1705-2
5SY1701-2
5SY1702-2
5SY1704-2
5SY1706-2
5SY1708-2
5SY1710-2
5SY1716-2

5SY1705-4
5SY1701-4
5SY1702-4
5SY1704-4
5SY1706-4
5SY1708-4
5SY1710-4
5SY1716-4

Mounting concept



AS Auxiliary switches
FC Fault signal contacts
AS+FC Auxiliary switches and fault signal contacts
RC mech. Remote controlled mechanisms

[See page 3/46](#)
[See page 3/48](#)
[See page 3/49](#)
[See page 3/54](#)

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		Article No.
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC) new		5ST3062-0MC
Remote controlled mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
Power with ARD	177 ... 270 V AC	5ST3058
	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
Power with extended function		
Adapters for remote controlled mechanisms (RC mech.)		Article No.
1 MW		5ST3820-6

5SK9 device protection switches

Electronic



Mounting width	1P+AS
	24 V DC
	6.2 mm

Rated current I_n	
1 A	5SK9101-1
2 A	5SK9102-1
3 A	5SK9103-1
4 A	5SK9104-1
6 A	5SK9106-1
8 A	5SK9108-1


Specific accessories

Connecting combs				
	Variant	Number of poles	Max. load current I _{max}	Article No.
	For parallel infeed	2-pole	24 A	8WH9020-6BC10
			32 A	8WH9020-6CC10
		5-pole	24 A	8WH9020-6BF10
			32 A	8WH9020-6CF10
	For remote signal – group signal	2-pole	32 A	8WH9020-6CC10
Reducing combs for 10 mm² terminal blocks				
	Variant	Number of poles	Max. load current I _{max}	Article No.
	For bypassing the power supply	2-pole	40 A	8WH9020-0AC10

See general accessories, page 14/57 onwards

Overview of the modular system

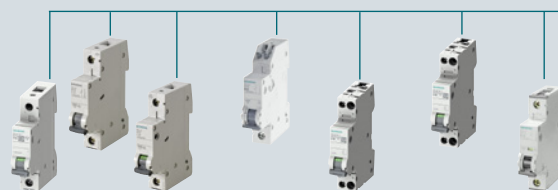Miniature circuit breakers



5SL3 5SL6 5SL4 5SJ6...-KS 5SL30 5SL60/5SL6 COM 5SY

Auxiliary switches (AS)



		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
		5ST1010-0FP

Fault signal contacts (FC)



	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)



	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC) new with communication and metering function	5ST3062-OMC

Shunt trips (ST)



	Article No.
AC 110 ... 415 V, DC 110 ... 220 V	5ST3030
AC/DC 24 ... 48 V	5ST3031
DC 12 V	5ST3031-0XX01

Undervoltage releases (UR)



With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote controlled mechanisms (RC mech.)



Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070

SSM6 arc fault detection devices



Rated current up to 16 A	Standard	5SM6021-2
	For compact devices 1P+N in 1 MW	5SM6011-2
Rated current up to 40 A	Standard	5SM6024-2
	For compact devices 1P+N in 1 MW	5SM6014-2

Standard busbars



	Article No.
Cannot be cut	5ST36..
Can be cut	5ST37..

Compact busbars



	Article No.
Cannot be cut	5ST36..
Can be cut	5ST37..

from page 3/12

■ Suitable for all versions

□ Suitable for some versions

Electrical accessories

Auxiliary switches (AS)



- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs).
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
Auxiliary switches (AS)									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2
Auxiliary switches (AS) acc. to UL 489									
5SJ4...-HG	-	-	-	-	-	1 NO + 1 NC	Standard	0.5 MW	5ST3010-0HG
						2 NO	Standard	0.5 MW	5ST3011-0HG
						2 NC	Standard	0.5 MW	5ST3012-0HG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

		5ST3010, 5ST3010-2, 5ST3011, 5ST3011-2, 5ST3012, 5ST3012-2, 5ST3016	5ST3013, 5ST3014, 5ST3015 5ST3013-0XX01	5ST3013-2 5ST3014-2 5ST3015-2	5ST3010-0HG 5ST3011-0HG 5ST3012-0HG
Further technical specifications					
Standards					
Standards		IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235		– UL 489, UL-File E321559, CSA 22.2 No. 5-02
Contacts					
Minimum contact load		50 mA, 24 V	1 mA, 5 V DC	50 mA, 5 V DC	50 mA, 24 V
Maximum contact load		–	100 mA, 30 V DC	50 mA, 30 V DC	–
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	AC 230 V, AC-12	–			
	AC 230 V, AC-13	6 A / 6 A	–		6 A / 6 A
	AC 400 V, AC-13	6 A / 6 A	–		6 A / 6 A
	AC 230 V, AC-14	2 A / 2 A	–		2 A / 2 A
	AC 400 V, AC-14	2 A / 2 A	–		2 A / 2 A
	DC 24 V, DC-13	6 A / 6 A	–		6 A / 3 A
	DC 60 V, DC-13	3 A / 3 A	–		3 A / 1.5 A
	DC 110 V, DC-13	1 A / 1 A	–		1 A / 0.75 A
	DC 220 V, DC-12	–			
Contact load acc. to UL	DC 220 V, DC-13	1 A / 1 A	–		1 A / 0.5 A
	120 V AC	–			6 A
	240 V AC	–			4 A
	277 V AC	–			3 A
	480 V AC	–			1.5 A
	60 V DC	–			3 A
	125 V DC	–			1 A
Service life, on average, with rated load	Actuations	20000	12000		
Safety					
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse			
Connections					
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)			
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)			
Ambient conditions					
Permissible ambient temperature		–25 ... +55 °C			
Permissible storage temperature		–40 ... +75 °C			
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles			
Mounting position		Any			
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²			
Resistance to vibrations at 5 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²			

Electrical accessories

Fault signal contacts (FC)



- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually
- Version with TEST and RESET buttons enable the testing of control circuits without operation of the protective switching device
- Red RESET button in the operating handle indicates automatic tripping of the mounted protective switching device

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET button							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2
Fault signal contacts (FC) acc. to UL 489							
5SJ4...-HG	–	–	–	–	1 NO + 1 NC	0.5 MW	5ST3020-0HG
					2 NO	0.5 MW	5ST3021-0HG
					2 NC	0.5 MW	5ST3022-0HG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

Standards			
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	
	UL, CSA	UL 1077, CSA C22.2 No. 235	UL 489, UL-File E321559, CSA 22.2 No. 5-02
Contacts			
Minimum contact load		50 mA, 24 V	
Contact load acc. to IEC/EN 62019 / IEC/EN 60947-5-1	230 V AC, AC-13	6 A / 6 A	
	400 V AC, AC-13	6 A / 6 A	
	230 V AC, AC-14	2 A / 2 A	
	400 V AC, AC-14	2 A / 2 A	
	24 V DC, DC-13	6 A / 6 A	6 A / 3 A
	60 V DC, DC-13	3 A / 3 A	3 A / 1.5 A
	110 V DC, DC-13	1 A / 1 A	1 A / 0.75 A
	220 V DC, DC-13	1 A / 1 A	1 A / 0.5 A
Contact load acc. to UL	120 V AC	–	6 A
	240 V AC	–	4 A
	277 V AC	–	3 A
	480 V AC	–	1.5 A
	60 V DC	–	3 A
	125 V DC	–	1 A
Service life, on average, with rated load	Actuations	20000	12000
Safety			
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse	
Connections			
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)	
Ambient conditions			
Permissible ambient temperature		–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles	
Mounting position		Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²	
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²	



Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm).
- Signals the contact position of the mounted device
- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

5ST3062

Standards		
Standards	IEC/EN UL, CSA	IEC/EN 62019, IEC/EN 60947-5-1 UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load acc. to IEC/EN 62019 / IEC/EN 60947-5-1	230 V AC, AC-13 400 V AC, AC-14	6 A / 6 A 2 A / 2 A
Contact load acc. to IEC/EN 62019 / IEC/EN 60947-5-1	24 V DC, DC-13 60 V DC, DC-13 110 V DC, DC-13 220 V DC, DC-13	3 A / 3 A 3 A / 1 A 0.5 A / 0.5 A 0.5 A / 0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²

Electrical accessories

5ST3 COM auxiliary switches and fault signal contacts (AS+FC)
with communication and metering function **new**



For combining with basic units	Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	Communication	Mounting width (1 MW = 18 mm)	Article No.
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and metering function								
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 ¹⁾ , 5SV1	5SV6		Radio link to 7KN Powercenter 1000	0.5 MW	5ST3062-0MC

¹⁾ Handle coupler 5ST3805-1 required

Note:

Please note the country-specific radio licenses of the products in SIOS:

www.siemens.com/lowvoltage/certificates


Further technical specifications

5ST3062-0MC

Standards		
Standards	IEC/EN; UL, CSA RED	60669-2-5 2014/53/EU
Power supply		
Power supply		24V DC ±20 %, SELV
Conductor cross-sections		0.2 ... 1.5 mm ²
Connection type		Plug-in terminal
Safety		
Pollution degree for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93 % at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Schock		150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²
Service life		10000
Communication		
Interface	7KN Powercenter 1000	Radio link
Temperature		Accuracy of 1°C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycle counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring



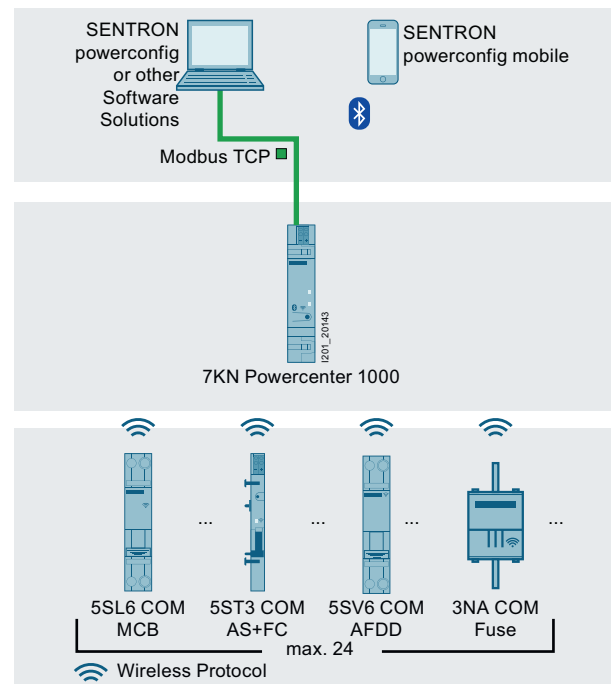7KN Powercenter 1000 data transceiver



- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



See page 10/17

You will find further information under:

Quick Installation Guide – 7KN Powercenter 1000 ([109791805](#))



System Manual – Circuit protection devices with communication and metering function ([109791806](#))



Electrical accessories

Shunt trips (ST)



- For remote-controlled tripping of the mounted device

For combining with basic units			Rated voltage U _n	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
Shunt trips (ST)					
5SL4, 5SY, 5SP	5SV	5SU1 ¹⁾	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC new	1 MW	5ST3031-0XX01
Shunt trips (ST) acc. to UL 489					
5SJ4...-HG	–	–	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030-OHG
			24 ... 60 V AC/DC	1 MW	5ST3031-OHG

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01	5ST3030-0HG	5ST3031-0HG
Standards						
Standards	IEC/EN	EN 60947-1			IEC/EN 60947-1	
	UL, CSA	–			UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Supply						
Primary operating range		0.7 ... 1.1 × U _n				
Rated frequency f _n		50 ... 60 Hz		–	50 ... 60 Hz	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V	50 mA, 24 V	
Tripping operations		Max. 2000				
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C	–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				



Undervoltage releases (UR)

- Integrated, e.g. in EMERGENCY-STOP loops
- Ensure that the mounted device trips in the event of an emergency, which, in turn, ensures disconnection of the control circuit according to EN 60204.
- Trip the mounted device if the voltage is interrupted or too low or prevents the mounted device from closing

For combining with basic units			Rated voltage U _n	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBOs			
With integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 ¹⁾	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 ¹⁾	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

¹⁾ Handle coupler 5ST3805-1 required

Further technical specifications

5ST304.

Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... $1.1 \times U_n$
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm ² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		−25 ... +55 °C
Permissible storage temperature		−40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s ²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s ²

Electrical accessories



5ST3 remote controlled mechanisms (RC mech.)

- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type of remote operating mechanism	Display	Ambient temperature	Vibration and shock requirements	Rated voltage U_n	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to DIN EN 61373 / DIN EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070

Further technical specifications

Further technical specifications		5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070
Standards								
Standards		EN 50557 (VDE 0640-20)						
Supply								
Rated frequency f _n		50 ... 60 Hz						
Rated power dissipation in standby		≤1 VA						
Contacts								
Service life, on average, with rated load		Actuations 10000						
Number of remote switching operations per minute		2						
Number of automatic reclose attempts		–				3		–
Cable length in the control circuit		≤1500 m						
Sliding selector with locking device		–	■					
Integrated auxiliary switches		–		1W (1CO); 2 A; 250 V				
Integrated fault signal contact		–		1W (1CO); 2 A; 250 V				
Connections								
Conductor cross-sections		0.5 ... 1.5 mm² (AWG 14 ... 30)						
Terminal tightening torque		0.2 ... 0.25 Nm (2.0 lb-in)						
Ambient conditions								
Permissible storage temperature		–40 ... +55 °C						–40 ... +70 °C
Degree of protection		IP20						
Pollution degree for overvoltage category		3/II						

Suitable adapters for combination with miniature circuit breakers



Basic units	Mounting width			Adapters
	1–2 MW	3–4 MW	3–6 MW	
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60 / 5SY17	■	–	–	5ST3820-6
5SP4	■	–	–	5ST3820-1
	–	–	■	5ST3820-2



5SM6 arc fault detection units (AFDD)

- Detects arcing faults
- Offers extremely effective protection against fires started by electrical faults
- Ensures adequate fire protection even in applications without residual current protective device

For combining with basic units			Rated current I _e	Mounting width (1 MW = 18 mm)	Article No.
Width of basic unit	Miniature circuit breakers	RCBOs			
1 MW	5SL60 2-pole (no KL types)	5SV1	Up to 16 A	1 MW	5SM6011-2
			Up to 40 A	1 MW	5SM6014-2
2 MW	5SY ¹⁾ , 5SL4 (1P+N devices only)	5SU1.5	Up to 16 A	1 MW	5SM6021-2
			Up to 40 A	1 MW	5SM6024-2

¹⁾ Not for 5SY5, 5SY8, 5SL60 2-pole

Further technical specifications

5SM6

Standards		
Standards		IEC/EN 62606
Supply		
Rated voltage U _n		230 V
Rated current I _n		Up to 16/40 A
Rated frequency		50 Hz
Power loss		0.6 W
Contacts		
Number of poles		2-pole
Service life	Average number of operating cycles	>10000
Safety		
Touch protection	Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Degree of protection	Acc. to EN 60529 (VDE 0470-1)	IP20, with connected conductors
Overvoltage category		III
Tripping in the event of overvoltage		>275 V
Connections		
Terminal/conductor cross-sections	Solid and stranded	0.75 ... 16 mm ²
	Finely stranded with end sleeve	0.75 ... 10 mm ²
Terminal tightening torque		2.0 ... 2.5 Nm
Mains connection		Bottom
Ambient conditions		
Permissible ambient temperature		−25 ... +40 °C
Permissible storage temperature		−40 ... +75 °C
Resistance to climate at 95% relative air humidity	Acc. to IEC 60068-2-30	28 cycles, 55 °C
Pollution degree		2
CFC and silicone-free		Yes
Mounting position		Any

Suitable busbars, page 3/58 onwards

Suitable busbars and end caps, page 3/74 onwards

Mechanical accessories

Mechanical rotary operating mechanisms complete with handle



- For 5SY, 5SP4, 5SL (but not for 5SL0 1P + N in 1TE), 5TL1, 5TE2, 5TE8, 5SU1

Versions	Article No.
Handle black	5ST3060
Handle red/yellow	5ST3061

Terminal cover



- For miniature circuit breakers, but not for 5SL60..
- For additional covering of the screw openings per pole
- Lockable
- In the case of 5SY, also prevents removal of device from the standard mounting rail

Article No.

5ST3800

Handle locking devices



- To prevent undesired mechanical ON/OFF switching
- Sealable and lockable

For miniature circuit breakers	For padlocks with	Article No.
5SP4, 5SY	Max. 3 mm shackle	5ST3801
5SL, 5TL1	3 ... 6 mm shackle	5ST3806

Padlocks



- For 5ST3801 and 5ST3806 handle locking devices and remote operating mechanisms 5ST3054 ... 58, 5ST3070

Article No.

5ST3802

Locking devices

- Comprising 5ST3801 or 5ST3806 handle locking device and 5ST3802 padlock


For miniature circuit breakers	Comprising	Article No.
5SP4 and 5SY	5ST3801 handle locking device, 5ST3802 padlock	5ST3803
5SL, 5SV, 5TL1	5ST3806 handle locking device, 5ST3802 padlock	5ST3807

Spacers



- Can be placed on either side of the standard mounting rail. Two spacers allow for convenient cable routing

Mounting width	Article No.
0.5 MW	5TG8240

Device labels			
	- Adhesive - For modular installation devices, e.g. 5SY, 5SL, 5TL1		
	Versions		Article No.
	15 x 6 mm, white (WIN 098)		8WH8210-0AA35
	15 x 6 mm, yellow (WIN 099)		8WH8210-0AA36
Terminal covers, gray			
	- For surface mounting, degree of protection IP40 - Sealable - Can be used with 35 mm mounting rail		
	For widths up to		Article No.
	2.5 MW		5SW3004
	4.5 MW		5SW3005
Wall enclosures, gray			
	- For flush mounting, degree of protection IP40 - Can be used with 35 mm mounting rail		
	For widths up to		Article No.
	2.5 MW		5SW3006
	4.5 MW		5SW3007
Molded-plastic enclosures, gray			
	- For surface mounting, degree of protection IP54 - Sealable - Can be used with 35 mm mounting rail - With transparent hinged lid		
	For widths up to		Article No.
	4.5 MW		5SW1200
	Covers		
	- Can be assembled as mini distribution board - Suitable for all devices - Cover parts prepared for rail mounting of conventional label caps		
	Comprising		Article No.
	End plate		5ST2134
	Angled profile		5ST2135
	Alternatively flat profile		5ST2136
Holders for front panel installation			
	Universal use for devices from 1 to 6 MW		
	Cutout height	Cutout width	Article No.
	45 ^{+0.5} mm	23, 41, 59, 77, 95 or 113 mm	7LF9006
Intermediate frames			
	For 70 mm devices in 55 mm ALPHA SIMBOX small distribution boards		
	Versions		Article No.
	1-tier		8GB4561
	2-tier		8GB4562
	3-tier		8GB4563
4-tier		8GB4564	

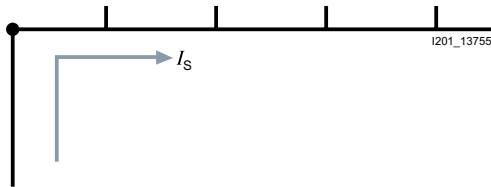
Standard busbars

General information



Infeed


At the start or end of the busbar



Maximum busbar current I_S /phase

- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

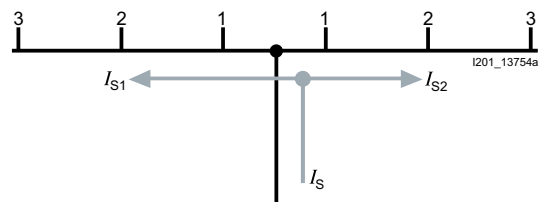Along the busbar or midpoint infeed








Maximum busbar current I_S /phase

- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A



Fixed length, cannot be cut





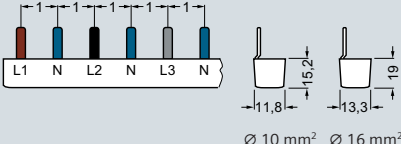
For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm ²	16 mm ²
1-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	33 mm	5ST3600	5ST3630
	For 6 MCBs 1P	6 MW	105 mm	5ST3601	5ST3631
	For 12 MCBs 1P	12 MW	212 mm	5ST3602	5ST3632
2-phase / 1-phase + N				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs (2P / 1P+N)	4 MW	76 mm	5ST3606	5ST3636
	For 3 MCBs (2P / 1P+N)	6 MW	105 mm	5ST3607	5ST3637
	For 6 MCBs (2P / 1P+N)	12 MW	210 mm	5ST3608	5ST3638
3-phase				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs 3P	6 MW	102 mm	5ST3613	5ST3643
	For 3 MCBs 3P	9 MW	157.5 mm	5ST3614	5ST3644
	For 4 MCBs 3P	12 MW	210 mm	5ST3615	5ST3645
	For 14 MCBs 1P new	14 MW	250 mm	5ST3613-4	–
	Combi pack: 20x 5ST3613 + 10x 5ST3614 + 50x 5ST3615 + 50x 5ST3655			5ST3656	–
	Combi pack: 20x 5ST3643 + 10x 5ST3644 + 50x 5ST3645 + 50x 5ST3655			–	5ST3657
4-phase / 3-phase + N				Article No.	Article No.
 Ø 10 mm ² Ø 16 mm ²	For 2 MCBs (4P / 3P+N)	8 MW	138 mm/ 140 mm	5ST3621	5ST3651
	For 3 MCBs (4P / 3P+N)	12 MW	210 mm	5ST3622	5ST3652
 Ø 10 mm ² Ø 16 mm ²	For 6 MCBs (1P+N)	12 MW	210 mm	5ST3623	5ST3653
	For 7 MCBs (1P+N) new	14 MW	248 mm	5ST3623-4	–

Standard busbars

Fixed length, cannot be cut

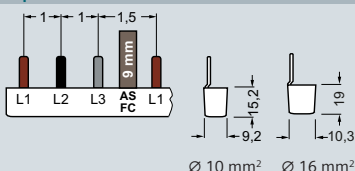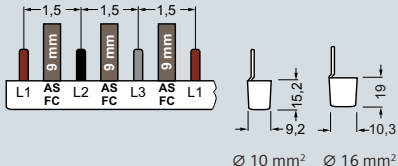For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)		Application	No. of MW	Length	Conductor cross-section	
					10 mm ²	16 mm ²
1-phase					Article No.	Article No.
		For 2 MCBs 1P	2 MW	40 mm	5ST3603	5ST3633
		For 6 MCBs 1P	6 MW	158 mm	5ST3604	5ST3634
		For 9 MCBs 1P	9 MW	237 mm	5ST3605	5ST3635
2-phase / 1-phase + N					Article No.	Article No.
		For 2 MCBs (2P / 1P+N)	4 MW	76 mm	–	5ST3640
		For 3 MCBs (2P / 1P+N)	6 MW	121 mm	–	5ST3641
		For 5 MCBs (2P / 1P+N)	10 MW	210 mm	–	5ST3642
3-phase					Article No.	Article No.
		For 2 MCBs 3P	6 MW	115 mm	5ST3616	5ST3646
		For 4 MCBs 3P	12 MW	237 mm	5ST3617	5ST3647
		For 6 MCBs 1P	9 MW	156 mm/ 158 mm	5ST3618	5ST3648
		For 9 MCBs 1P	12 MW	227 mm	5ST3620	5ST3650

Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

Terminals for infeed at side		Article No.
For conductors up to 25 mm ²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		Article No.
For free connections, yellow (RAL 1004) 5x 1 pin		5ST3655











For MCBs with RCCB

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				10 mm ²	16 mm ²
3-phase					
For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654	
For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4 new	—	
For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1 new	—	
For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668	
4-phase / 3-phase + N					
For 1 RCCB 3P+N, 1 MCBs 3P+N and 6 MCBs 1P	14 MW	248 mm	5ST3724-4 new	—	
For 1 RCCB 3P+N, 1 MCBs 3P+N and 3 MCBs 1P+N	14 MW	248 mm	5ST3725-4 new	—	
For 1 RCCB 3P+N, 1 MCBs 3P and 3 MCBs 1P+N	13 MW	230 mm	5ST3725-3 new	—	
For 1 RCCB 3P+N and 5 MCBs 1P+N	14 MW	248 mm	5ST3625-4 new	—	

Standard busbars

Can be cut


For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Farbe	Conductor cross-section		
						10 mm²	16 mm²	
1-phase, straight							Article No.	Article No.
	For MCBs 1P+N compact	12 MW	216 mm	■	Gray	5ST3762	–	
					Blue	5ST3687-0	–	
		56 MW	1016 mm	–	Gray	5ST3764	–	
					Blue	5ST3787-0	–	
1-phase, angled 45°							Article No.	Article No.
	For MCBs 1P+N compact	12 MW	216 mm	■	Blue	5ST3763	–	
		56 MW	1016 mm	–	Blue	5ST3765	–	
1-phase, angled 90°							Article No.	Article No.
	For MCBs 1P	12 MW	214 mm	■		5ST3730	5ST3700	
		56 MW	1016 mm	–		5ST3731	5ST3701	
2-phase / 1-phase + N							Article No.	Article No.
	For 2MW devices (2P / 1P+N)	12 MW	214 mm	■		5ST3734	5ST3704	
		56 MW	1016 mm	–		5ST3735	5ST3705	
3-phase							Article No.	Article No.
	For MCBs 3P	12 MW	214 mm	■		5ST3738	5ST3708	
		56 MW	1016 mm	–		5ST3740	5ST3710	
4-phase / 3-phase + N							Article No.	Article No.
	For MCBs 4P or 3P+N	12 MW	214 mm	■		5ST3745	5ST3715	
		56 MW	1016 mm	–		5ST3746	5ST3716	
		For RCCB/MCBs or MCBs 1P+N	56 MW	1000 mm	–	5ST3770-2	5ST3770-3	
								
		Ø 10 mm²		Ø 16 mm²				






Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5
Terminals for Infeed at side		Article No.
For conductors up to 25 mm ²	Short	5ST3768
	Short, IP20	5ST3771-2


End caps		Article No.
For 1-phase busbars (MCB 1P+N compact)	Gray	5ST3766
	Blue	5ST3767
	White	5ST3748
For 2-phase busbars		5ST3750
Touch protection		Article No.
For free connections, yellow (RAL 1004) 5x 1 pin		5ST3655



For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm ²	16 mm ²
1-phase, angled 90°					Article No.	Article No.
	For MCBs 1P	12 MW	214 mm	■	5ST3732	5ST3702
		56 MW	1016 mm	–	5ST3733	5ST3703
2-phase / 1-phase + N					Article No.	Article No.
	For 2 MW devices (2P / 1P+N)	12 MW	214 mm	■	5ST3736	5ST3706
		56 MW	1016 mm	–	5ST3737	5ST3707
3-phase					Article No.	Article No.
	For MCBs 3P	12 MW	214 mm	■	5ST3741	5ST3711
		56 MW	1016 mm	–	5ST3742	5ST3712
	For MCBs 1P	12 MW	214 mm	■	5ST3743	5ST3713
		56 MW	1016 mm	–	5ST3744	5ST3714
4-phase / 3-phase + N					Article No.	Article No.
	For MCBs 1P+N	56 MW	1016 mm	–	5ST3746-2	–

For MCBs equipped with undervoltage release (UR) or shunt trips (ST)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section	
					10 mm ²	16 mm ²
2-phase					Article No.	Article No.
	For MCBs 1P with UR / ST	56 MW	1016 mm	–	5ST3735-2	–

Standard busbars

Can be cut



For MCBs with line-side RCCB or RCCBs equipped with AS / FC devices

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section	
					10 mm ²	16 mm ²
4-phase / 3-phase + N					Article No.	Article No.
	For RCCB/MCBs	56 MW	1016 mm	–	5ST3746-2	–
	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5







Accessories

Terminals for 5ST36 and 5ST37		Article No.	End caps		Article No.
For conductors up to 25 mm ²	Cable entry on the left	5ST3768-4	For 3-phase busbars		5ST3750
	Cable entry in the center	5ST3768-3	For 4-phase busbars		5ST3718
	Cable entry on the right	5ST3768-5	Touch protection		Article No.
For conductors up to 50 mm ²	Cable entry on the left	5ST3760-4	For free connections, yellow (RAL 1004) 5x 1 pin		5ST3655
	Cable entry in the center	5ST3760-3			
	Cable entry on the right	5ST3760-5			



5ST37 acc. to UL 508, can be cut

For miniature circuit breakers (MCBs)





Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				18 mm ²	25 mm ²
1-phase				Article No.	Article No.
	For MCBs 1P or fuse holders 10 x 38 mm / class CC	56 MW	1000 mm	5ST3701-0HG	–
	For MCBs 1P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3701-2HG
2-phase				Article No.	Article No.
	For MCBs 2P or fuse holders 10 x 38 mm / class CC	56 MW	1000 mm	5ST3705-0HG	–
	For MCBs 2P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3705-2HG
3-phase				Article No.	Article No.
	For MCBs 3P or fuse holders 10 x 38 mm / class CC	56 MW	1000 mm	5ST3710-0HG	–
	For MCBs 3P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3710-2HG

Standard busbars




5ST37 acc. to UL 508, can be cut

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section	
				18 mm ²	25 mm ²
1-phase					
	For MCBs 1P	56 MW	1000 mm	5ST3703-OHG	–
2-phase					
	For MCBs 2P	56 MW	1000 mm	5ST3707-OHG	–
3-phase					
	For MCBs 3P	56 MW	1000 mm	5ST3712-OHG	–
	For MCBs 1P	56 MW	1000 mm	5ST3714-OHG	–

Accessories

Terminals according to UL 489		Article No.	Touch protection according to UL 508		Article No.
For infeed at the device	35 mm ²	5ST3770-OHG	For open terminals, yellow 5 × 1 pin		5ST3655-OHG
For infeed at the busbar	50 mm ²	5ST3770-1HG			
End caps according to UL 508		Article No.			
For 1-phase busbars		5ST3748-OHG			
For 2-, and 3-phase busbars		5ST3750-OHG			



5ST3.. acc. to UL 489 specially for 5SJ4...-HG..

Fixed length, cannot be cut, for miniature circuit breakers (MCBs) ¹⁾


Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 16 mm ²
1-phase				Article No.
	For 6 MCBs 1P	6 MW	100 mm	5ST3663-0HG
	For 12 MCBs 1P	12 MW	205 mm	5ST3663-1HG
	For 18 MCBs 1P	18 MW	310 mm	5ST3663-2HG
2-phase				Article No.
	For 3 MCBs 2P	6 MW	100 mm	5ST3664-0HG
	For 6 MCBs 2P	12 MW	205 mm	5ST3664-1HG
	For 9 MCBs 2P	18 MW	310 mm	5ST3664-2HG
3-phase				Article No.
	For 2 MCBs 3P	6 MW	100 mm	5ST3665-0HG
	For 4 MCBs 3P	12 MW	205 mm	5ST3665-1HG
	For 6 MCBs 3P	18 MW	310 mm	5ST3665-2HG

¹⁾ All unassigned pins of the busbars that cannot be cut must be covered with 5ST3666-1HG touch protection covers.

Can be cut, for MCBs

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm ²
1-phase				Article No.
	For MCBs 1P	56 MW	1016 mm	5ST3701-3HG
2-phase				Article No.
	For MCBs 2P	56 MW	1016 mm	5ST3705-3HG
3-phase				Article No.
	For MCBs 3P	56 MW	1016 mm	5ST3710-3HG

Standard busbars



5ST3.. according to UL 489 speziell For 5SJ4... -HG..

Can be cut, for MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm ²
1-phase				Article No.
	For MCBs 1P	56 MW	1016 mm	5ST3703-3HG
2-phase				Article No.
	For MCBs 2P	56 MW	1016 mm	5ST3707-3HG
3-phase				Article No.
	For MCBs 3P	56 MW	1016 mm	5ST3712-3HG
	For MCBs 1P	56 MW	1016 mm	5ST3714-3HG

Accessories

Terminals according to UL 489		Article No.	Touch protection acc. to UL 489		Article No.
For infeed at the 5SJ4... -HG.. miniature circuit breaker	16 mm ²	5ST3666-0HG	For open terminals, yellow 3x 1 pin	For 5ST37...-HG busbars that cannot be cut	5ST3666-1HG
For infeed at the busbar	16 mm ²	5ST3666-2HG		For 5ST37...-3HG busbars that can be cut	5ST3655-3HG
End caps acc. to UL 489		Article No.			
For 1-, 2-, and 3-phase busbars		5ST3750-3HG			

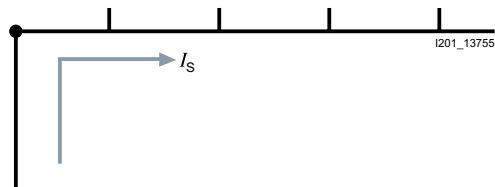
Compact busbars

General information



Infeed


At the start or end of the busbar



Maximum busbar current I_S /phase

- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

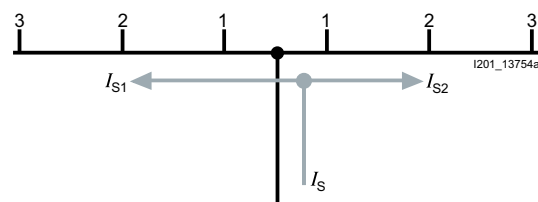Along the busbar or midpoint infeed




Maximum busbar current I_S /phase

- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Compact busbars

5ST36, fixed length, cannot be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross- section 10 mm ²
2-phase / 1-phase + N, for infeed via RCCB					
	For 1× RCCB 1P+N and 5× compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	Article No. 5ST3685-0
2-phase / 1-phase + N					
	For compact devices	6 MW 9 MW 12 MW	113 mm 166 mm 218 mm	■ ■ ■	Article No. 5ST3674-6 5ST3674-7 5ST3674-0
	For 12x CBE (device protection switch) 5SY17	12 MW	218 mm	■	5ST3674-1
	For 6× compact devices equipped with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3676-0
4-phase / 3-phase + N					
	For compact devices	6 MW 9 MW 12 MW 14 MW	113 mm 116 mm 218 mm 254 mm	■ ■ ■ ■	Article No. 5ST3673-6 5ST3673-7 5ST3673-0 5ST3673-4
	For 6× compact devices equipped with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3675-0



5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross- section 10 mm ²
2-phase / 1-phase + N, for infeed via RCCB					
	For 1× RCCB 1P+N and 10× compact devices	12 MW	215 mm	■	Article No. 5ST3784-0
	For 1× RCCB 1P+N (RCCB N left only) and 10× compact devices	12 MW	215 mm	■	5ST3784-0KL
2-phase / 1-phase + N					
	For compact devices	60 MW	1060 mm	–	Article No. 5ST3774-0
	For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0
	For compact devices equipped with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0
	For 2 MW units (MCBs or RCBOs) with mounted arc fault detection device block 5SM6 and auxiliary switch	54 MW	956 mm	–	5ST3786-0


Accessories

Terminals for infeed at side		Article No.	Touch protection		Article No.
For conductors up to 25 mm ²	Short, IP20	5ST3771-2	For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
End caps		Article No.		For pins L2, L3	5ST3655-0HG
2- and 4-phase busbars		5ST3788-0			

Compact busbars

5ST37, can be cut

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross- section 10 mm ²	Article No.
4-phase / 3-phase + N, for infeed via RCCB						
	For 1× RCCB 3P+N and 6× compact devices	10 MW	181 mm	■	5ST3783-1 new	
	For 1× RCCB 3P+N and 8× compact devices	12 MW	216 mm	■	5ST3783-0	
	For 1× RCCB 3P+N and 10× compact devices	14 MW	251 mm	■	5ST3783-4 new	
	For 1× RCCB 3P+N (RCCB N left only) and 6× compact devices	10 MW	181 mm	■	5ST3783-1KL new	
	For 1× RCCB 3P+N (RCCB N left only) and 8× compact devices	12 MW	216 mm	■	5ST3783-0KL	
	For 1× RCCB 3P+N, 1× MCBs 3P and 7× compact devices	14 MW	253 mm	■	5ST3785-4 new	
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 12× compact devices	24 MW	430 mm	■	5ST3790-1 new	
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 45× compact devices	57 MW	1009 mm –		5ST3790-2 new	
	For 1× RCCB 3P+N, 1× MCBs 3P+N and 4× compact devices	12 MW	217 mm	■	5ST3795-0 new	
	For 1× RCCB 3P+N, 1× MCBs 3P+N and 6× compact devices	14 MW	253 mm	■	5ST3795-4 new	



Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross- section 10 mm ²
4-phase / 3-phase + N					
	For compact devices	60 MW	1060 mm	–	Article No. 5ST3773-0
	For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3775-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

Accessories

Terminals for infeed at side	Article No.	Touch protection	Article No.
For conductors up to 25 mm ² Short, IP20	5ST3771-2	For free connections, yellow (RAL 1004)	For pins L1, N 5ST3655
End caps	Article No.		For pins L2, L3 5ST3655-0HG
2- and 4-phase busbars	5ST3788-0		

Accessories for busbars

General accessories

Terminals



For conductors	Version	Cable entry	Infeed	Article No.
Up to 25 mm ²	Short	–	Side	5ST3768
	Short, IP20	–	Side	5ST3771-2
Up to 25 mm ²	–	Center	–	5ST3768-3
		Left	–	5ST3768-4
		Right	–	5ST3768-5
Up to 30 mm ²	–	–	Busbar	5ST3770-1HG
Up to 35 mm ²	–	–	Device	5ST3770-0HG
Up to 35 mm ²	For 5SJ4... -HG..	–	Miniature circuit breaker	5ST3666-0HG
	For 5ST37...-3HG that can be cut	–	Miniature circuit breaker	5ST3770-3HG
Up to 50 mm ²	–	Center	–	5ST3760-3
		Left	–	5ST3760-4
		Right	–	5ST3760-5
Up to 50 mm ²	–	–	Busbar	5ST3666-2HG

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■	■			
■	■			
	■			
	■			
	■			
		■		
		■		
			■	
			■	
	■			
	■			
	■			
			■	

Accessories for busbars

General accessories

Touch protection



Version	Scope of supply	Version	Article No.
For free connections, yellow (RAL 1004)	5× 1 pin	–	5ST3655
			5ST3655-0HG
	3× 1 pin	–	5ST3666-1HG
		–	5ST3655-3HG
For 10 mm ² conductors	20× 5ST3613 + 10× 5ST3614 + 50× 5ST3615 + 50× 5ST3655	–	5ST3656
For 16 mm ² conductors	20× 5ST3643 + 10× 5ST3644 + 50× 5ST3645 + 50× 5ST3655	For 5ST337..-3HG	5ST3657

End caps



Version	Color	Article No.
For 1-phase busbars	Gray	5ST3748
For 2- and 3-phase busbars	Gray	5ST3750
For 4-phase busbars	Gray	5ST3718
For 1-, 2- and 3-phase busbars	Gray	5ST3750-3HG
–	Gray	5ST3766
–	Blue	5ST3767
For 1-phase busbars	Gray	5ST3748-0HG
For 2- and 3-phase busbars	Gray	5ST3750-0HG
For 2- and 4-phase compact busbars	Gray	5ST3788-0

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■		■	■	■
			■	■
			■	
■				
■				
	■			
	■			
	■			
			■	
■				
■				
			■	
			■	
				■

Accessories for busbars

General accessories

Series connectors



Conductor cross-section	Length of cable	Color	Number of phases	Article No.
10 mm ²	125 mm	N conductor blue	1	5ST3781-0
		Cable black	1	5ST3791-0
			3	5ST3793-0
	150 mm	N conductor blue	1	5ST3781-1
		Cable black	1	5ST3791-1
			3	5ST3793-1



16 mm ²	125 mm	N conductor blue	1	5ST3782-0
		Cable black	1	5ST3792-0
			3	5ST3794-0
	150 mm	N conductor blue	1	5ST3782-1
		Cable black	1	5ST3792-1
			3	5ST3794-1
	200 mm	N conductor blue	1	5ST3781-2
		Cable black	1	5ST3791-2
			3	5ST3793-2
		3x cables black and 1x N conductor blue	3 + N	5ST3793-3

Distribution blocks for standard rail mounting

Acc. to IEC

Distribution blocks acc. to IEC




Number of poles	Operational voltage U_e	Rated current I_e	Mounting width	Article No.
4-pole	690 V AC	80 A	5 MW	5ST2501
		125 A	5.5 MW	5ST2502
		160 A	9 MW	5ST2503

Further technical specifications

Further technical specifications			5ST2501	5ST2502	5ST2503
Standards					
Standards			IEC 60947-7-1		
Supply					
Operational voltage AC			690 V		
Max. rated current			80 A	125 A	160 A
Conductor cross-section					
Inputs per pole	Solid/stranded		1× 2.5 ... 16 mm ²	1× 6 ... 35 mm ²	1× 10 ... 50 mm ²
	Finely stranded with end sleeve		1× 1.5 ... 10 mm ²	1× 6 ... 25 mm ²	1× 10 ... 35 mm ²
Outputs per pole	Solid/stranded		8× 1.5 ... 10 mm ²	5× 1.5 ... 6 mm ² 2× 4 ... 16 mm ²	8× 2.5 ... 16 mm ² 3× 10 ... 35 mm ²
	Finely stranded with end sleeve		8× 1.5 ... 10 mm ²	5× 1.5 ... 6 mm ² (small) 2× 4 ... 10 mm ² (large)	8× 1.5 ... 16 mm ² (small) 3× 10 ... 25 mm ² (large)
Tightening torque					
Inputs	Screw terminals		13.5 lb-in (1.5 Nm)		3.5 ... 5 lb-in (2 Nm)
	Tools		PZ2		
Outputs	Screw terminals	Large	13.5 lb-in (1.5 Nm)		
		Small	–	7.2 lb-in (0.8 Nm)	13.5 lb-in (1.5 Nm)
	Tools	Large	PZ1	PZ2	
		Small	–	PZ1	PZ2
Safety					
Rated peak withstand current I _{pk}			21.6 kA	24 kA	20 kA
Rated short-time withstand current I _{cw} (1 s)			3 kA	4.2 kA	6.2 kA
Ambient conditions					
Permissible ambient temperature			–25 ... +70 °C		
Degree of protection	Acc. to EN 60529		IP 20		
Approved cable			Copper		

According to IEC and UL

Distribution blocks acc. to IEC and UL					
	Number of poles	Operational voltage U _e	Rated current I _e	Mounting width	Article No.
	1-pole	600 V AC	80 A	1.5 MW	5ST2504
			125 A	1.5 MW	5ST2505
			160 A	2 MW	5ST2507
			250 A	2.5 MW	5ST2508
			350 A	2.5 MW	5ST2511
Connector for 5ST2505 distribution board					
	• Touch protection • 20 mm² • 32 mm				
	Version				Article No.
	1-phase				5ST2506
Terminal lug for ring terminal ends					
	Versions				Article No.
	For 5ST2508 distribution block				5ST2510
	For 5ST2511 distribution block				5ST2512

Further technical specifications			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511	
Standards								
Standards			UL 1059 / UL 486E / IEC 60947-7-1 UL File No. E80027 / XCFR2 C22.2 No. 158 -1987 / XCFR8					
Supply								
Operational voltage		UL	600 V AC					
		IEC	1000/1500 V AC/DC					
Max. rated current		UL	80 A	115 A	160 A	230 A	310 A	
		IEC	80 A	125 A	160 A	250 A	400 A	
Conductor cross-section								
Inputs per pole	Solid/stranded	Large	3× 2.5 ... 25 mm ²	10 ... 35 mm ²	10 ... 70 mm ²	35 ... 120 mm ²	95 ... 185 mm ²	
			AWG 3× 14 ... 4	AWG 1× 8 ... 2	AWG 1× 8 ... 2/0	AWG 1× 2 ... 4/0	AWG 1× 3/0 ... 350 MCM	
		Small	–	2.5 ... 25 mm ²	–	–	–	
			–	AWG 1× 14 ... 6	–	–	–	
	Finely stranded with end sleeve	Large	3× 2.5 ... 16 mm ²	10 ... 35 mm ²	10 ... 50 mm ²	35 ... 95 mm ²	95 ... 150 mm ²	
			AWG 3× 14 ... 6	AWG 1× 8 ... 2	AWG 1× 8 ... 1	AWG 1× 2 ... 3/0	AWG 3/0 ... 300 MCM	
		Small	–	2.5 ... 25 mm ²	–	–	–	
			–	AWG 1× 14 ... 6	–	–	–	
Outputs per pole	Solid/stranded	Top	2.5 ... 6 mm ²	2.5 ... 16 mm ²	2.5 ... 16 mm ²	2.5 ... 10 mm ²	2× 2.5... 35 mm ²	
			AWG 4× 14 ... 10	AWG 6× 14 ... 4	AWG 6× 14 ... 4	AWG 4× 16 ... 8	AWG 2× 14 ... 2	
		Center	–	–	–	2.5 ... 16 mm ²	5× 2.5 ... 16 mm ²	
			–	–	–	AWG 5× 14 ... 6	–	
		Bottom	2.5 ... 6 mm ²	–	–	2× 2.5... 35 mm ²	4× 2.5 ... 10 mm ²	
			AWG 4× 14 ... 10	–	–	AWG 2× 14 ... 2	AWG 4× 14 ... 8	
		Finely stranded with end sleeve	Top	2.5 ... 6 mm ²	2.5 ... 16 mm ²		2× 2.5... 25 mm ²	
				AWG 4× 14 ... 10	AWG 6× 14 ... 6	AWG 6× 14 ... 4	AWG 2× 14 ... 4	
	Bottom		2.5 ... 6 mm ²	–	–		2× 2.5... 25 mm ²	4× 2.5 ... 25 mm ²
			AWG 4× 14 ... 10	–	–		AWG 2× 14 ... 4	AWG 5× 14 ... 4

Continued on next page

Distribution blocks for standard rail mounting

According to IEC and UL (continued)

Further technical specifications			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511
Tightening torque							
Inputs	Screw terminals		13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 44 lb-in (3.5 ... 5 Nm)	44 ... 53 lb-in (5 ... 6 Nm)	170 ... 186 lb-in (19 ... 21 Nm)	222 lb-in (25 Nm)
	Tools		PZ2	Allen key 4 mm	Allen key 5 mm	Allen key 6 mm	Allen key 8 mm
Outputs	Screw terminals	Large	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	17.7 ... 26.5 lb-in (2 ... 3 Nm)	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 62 lb-in (3.5 ... 7 Nm)	
		Small	7 ... 13.2 lb-in (0.8 ... 1.5 Nm)	–		18 ... 27 lb-in (2 ... 3 Nm)	
	Tools	Large	PZ2			Standard screwdriver	
		Small	PZ1	PZ2		Standard screwdriver	
Safety							
Rated peak withstand current I _{pk}			2.7 kA	30 kA		51 kA	
Rated short-time withstand current I _{cw} (1 s)			1.9 kA	4.2 kA	11 kA	21 kA	
Overcurrent protection class			J				
Short circuit current rating (SCCR)	RMS Sym A		100 kA				
Electrical isolation	Creepage distances		1/2" (12.7 mm)				
	Clearances		3/8" (9.5 mm)				
Ambient conditions							
Permissible ambient temperature			–25 ... +70 °C				
Degree of protection	Acc. to EN 60529		IP20				
Fire class			UL 94V-0				
Approved cable			Copper				

SIKclip wiring system

SIKclip busbar



Length	Article No.
12 MW	5ST2520
24 MW	5ST2521
36 MW	5ST2522

Connecting cables with plug



Length	Conductor cross-section	Color	Article No.
120 mm	6 mm ²	Black	5ST2523
		Blue	5ST2524
	10 mm ²	Black	5ST2525
		Blue	5ST2526
200 mm	6 mm ²	Black	5ST2527
		Blue	5ST2528
	10 mm ²	Black	5ST2530
		Blue	5ST2531

Crimp connector



For connection to cables 4/6 mm²	Article No.
	5ST2532

Mounting brackets



For mounting on the rear of the standard mounting rail (pair)	Article No.
	5ST2533

Further technical specifications

5ST25..

Standards	
Test specifications	EN 60947-1, EN 61439-1
Rated values	
Rated operational voltage U_n	400 V AC
Max. rated current I_n	250 A
Max. rated output current I_n (at 40 °C ambient temperature)	63 A
Rated insulation voltage	660 V AC
Test voltage (50 Hz)	2.5 kV
Ambient conditions	
Degree of protection	IP20
Connecting cables	40 A (6 mm ²), 63 A (10 mm ²)
Connecting cable type	H07VK
Ambient temperature	−5 ... +60 °C



Appendix



Conditions of sale and delivery _____ A/2

Link directory _____ A/4

Conditions of sale and delivery

1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C“). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany“¹⁾ and/or
- for consulting services the „Allgemeine Geschäftsbedingungen für Beratungsleistungen der Division DF – Deutschland“ (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services (‘‘BL’’)¹⁾ and/or
- for other supplies the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾.

In case such supplies should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“¹⁾, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the „Standard Terms and Conditions for Consulting Services of the Division DF for Customers with a Seat or Registered Office Outside of Germany“¹⁾ and/or
- for other services the „International Terms & Conditions for Services“¹⁾ supplemented by „Software Licensing Conditions“¹⁾ and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products“¹⁾ supplemented by „Software Licensing Conditions“¹⁾

1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

¹⁾ The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN“ unequal „N“) and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations. Products labeled with „AL“ unequal „N“ are subject to European / national export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL“ and „ECCN“ indicated on order confirmations, delivery notes and invoices are authoritative.

Products without label, with label „AL:N“ / „ECCN:N“, or label „AL:9X9999“ / „ECCN: 9X9999“ may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-)export control regulations. In any event of such transfer of goods, works and services you shall comply with the (re-) export control regulations of the Federal Republic of Germany, of the European Union and of the United States of America.

Prior to any transfer of goods, works and services provided by us to a third party you shall in particular check and guarantee by appropriate measures that

- there will be no infringement of an embargo imposed by the European Union, by the United States of America and/ or by the United Nations by such transfer, by brokering of contracts concerning those goods, works and services or by provision of other economic resources in connection with those goods, works and services, also considering the limitations of domestic business and prohibitions of by-passing those embargos;
- such goods, works and services are not intended for use in connection with armaments, nuclear technology or weapons, if and to the extent such use is subject to prohibition or authorization, unless required authorization is provided;
- the regulations of all applicable Sanctioned Party Lists of the European Union and the United States of America concerning the trading with entities, persons and organizations listed therein are considered.

If required to enable authorities or us to conduct export control checks, you, upon request by us, shall promptly provide us with all information pertaining to the particular end customer, the particular destination and the particular intended use of goods, works and services provided by us, as well as any export control restrictions existing.

You acknowledge that under the EU embargo regulations against Iran, Syria and Russia respectively the sale of certain listed goods and related services is subject to authorization by the competent export control authorities of the European Union. If (1) the goods or services ordered by you are destined for Iran, Syria or Russia, and (2) the contract for our supplies and/or services is subject to prior authorization of the competent export control authorities of the European Union, the contract between you and us shall come into force in this respect only upon granting of such authorization.

The products listed in this catalog may be subject to European/ German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities. Errors excepted and subject to change without prior notice.

Link directory

Catalog LV 10

General information

Information on low-voltage power distribution and electrical installation technology	www.siemens.com/lowvoltage
Tender specifications	www.siemens.com/lowvoltage/tenderspecifications
Conversion tool	www.siemens.com/conversion-tool
Image database	www.siemens.com/lowvoltage/picturedb
CAX download manager	www.siemens.com/lowvoltage/cax
Newsletter system	www.siemens.com/lowvoltage/newsletter
Siemens YouTube channel	www.youtube.com/Siemens
Brochures / catalogs	www.siemens.com/lowvoltage/catalogs
Operating instructions / manuals	www.siemens.com/lowvoltage/manuals
Siemens Industry Online Support (SIOS)	www.siemens.com/lowvoltage/product-support
Siemens Industry Online Support app	www.siemens.com/support-app
My Documentation Manager (MDM)	www.siemens.com/lowvoltage/mdm
Configurators	www.siemens.com/lowvoltage/configurators
Siemens Industry Mall – product catalog and online ordering system	www.siemens.com/lowvoltage/mall
Direct forwarding to the Industry Mall	www.siemens.com/product?Article No.
Training	www.siemens.com/sitrain-lowvoltage
Local contacts	www.siemens.com/lowvoltage/contact www.siemens.com/lowvoltage/components/contact www.siemens.com/lowvoltage/systems/contact www.siemens.com/lowvoltage/software/contact
Technical Support	www.siemens.com/lowvoltage/support-request
Information on services	www.siemens.com/service-catalog
Manual for the generation, transmission and distribution of electrical energy	www.siemens.com/power-engineering-guide
Control panels for the North American market	www.siemens.com/northamerican-standards
Control panel building	www.siemens.com/controlpanel
Energy savings and amortization	www.automation.siemens.com/sinasave
Energy Suite	www.siemens.com/energysuite
SITOP power supplies	www.siemens.com/sitop
Power distribution with Totally Integrated Power	www.siemens.com/tip

Catalogs and further information



LV 10 Low-Voltage Power Distribution and Electrical Installation Technology SENTRON • SIVACON • ALPHA

Protection, Switching, Measuring and
Monitoring Devices, Switchboards and
Distribution Systems

PDF (E86060-K8280-A101-B3-7600)



LV 14 Power Monitoring Made Simple SENTRON

E86060-K1814-A101-A7-7600



LV 18 Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification SENTRON

PDF (E86060-K8280-E347-A6-7600)



ET D1 Switches and Socket Outlets DELTA

PDF



IC 10 Industrial Controls SIRIUS

PDF (E86060-K1010-A101-B2-7600)




Industry Mall Information and Ordering Platform on the Internet:

www.siemens.com/industrymall



Siemens TIA Selection Tool for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst



SITRAIN Digital Industry Academy

www.siemens.com/sitrain

The catalogs listed above and additional catalogs are
available in PDF format at Siemens Industry Online Support
www.siemens.com/lowvoltage/catalogs

Further information on low-voltage power distribution
and electrical installation technology is available on the
Internet at www.siemens.com/lowvoltage

Get more information

www.siemens.com/lowvoltage

Published by
Siemens AG

For the U.S. published by
Siemens Industry Inc.

Smart Infrastructure
Electrical Products
Siemensstraße 10
93055 Regensburg, Germany

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (Extract from E86060-K8280-A101-B3-7600)
KG 0621 90 En
Produced in Germany
© Siemens 2021

Subject to changes and errors. The information given in this catalog only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the Internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit
<https://www.siemens.com/industrialsecurity>

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under
<https://www.siemens.com/industrialsecurity>