



a) Part as supplied.

DSPL-NR*

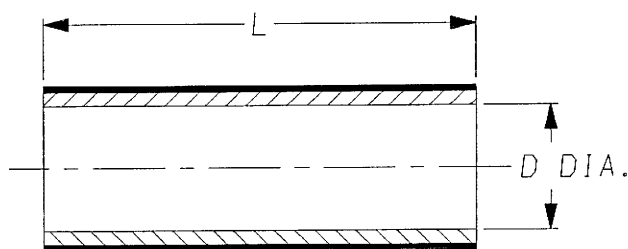

b) Part fully recovered.

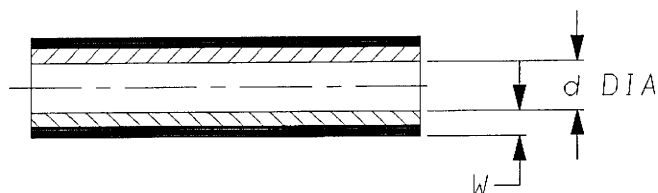

OUTER JACKET;- Irradiated Modified Polyolefin Type, COLOUR: Clear (-X)
Black (-0)

INNER LINER;- Polyamide Hot-Melt Adhesive, COLOUR: LIGHT AMBER (-X)
Temperature rating 125°C

Dimensions (in millimetres).

SIZE Nr.	D DIA. MIN a	d DIA. MAX b	W MIN b	L NOM a
1	5.7	1.27	1.15	50
2	7.5	1.65	1.40	50
3	10.8	2.40	1.80	65
4 #	17.5	4.50	2.10	75

Nr.4 Available in BLACK only.

Fully recovered longitudinal shrinkage 0 to -10%

Copyright (!)

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY. Checked *[Signature]* Issue 2 Date August 2000


Conforms to ISO Recommendations
3rd Angle Projection
Not to Scale

Approval
Design

[Signature]
8.8.00

MKTG.
[Signature]
8.8.00

Q.A.
[Signature]
8.8.00



Iss.	Date	E.C.R. No.	Details of Change
2	August 2000	CR00-DM-0147	DSPL-NR was DSPL-125-NR

Raychem interconnect
 a Division of Tyco Electronics
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 572516