

SPECIFICATIONS

PXIe-5668

Up to 26.5 GHz PXI Vector Signal Analyzer

These specifications apply to the PXIe-5668 (14 GHz) Vector Signal Analyzer and the PXIe-5668 (26.5 GHz) Vector Signal Analyzer with 320/765 MHz bandwidth, 200 MHz bandwidth, or 80 MHz bandwidth.

When not otherwise specified, the specifications for the PXIe-5668 in this document refer to both the PXIe-5668 (14 GHz) and the PXIe-5668 (26.5 GHz).

The PXIe-5668 comprises the following modules:

- PXIe-5606 RF Signal Downconverter
- PXIe-5624 IF Digitizer
- PXIe-5653 RF Analog Signal Generator

There is no single device labeled "PXIe-5668."

In this document, preamplifier refers to the onboard 3.6 GHz preamplifier, not the external PXIe-5698 preamplifier module.

Contents

| | |
|---|----|
| Definitions..... | 3 |
| Conditions..... | 3 |
| Frequency..... | 4 |
| Bandwidth..... | 4 |
| Frequency Reference..... | 6 |
| Spectral Purity..... | 8 |
| Amplitude..... | 10 |
| Amplitude Range..... | 10 |
| Display Average Noise Level..... | 10 |
| Amplitude Accuracy..... | 13 |
| Spurious Responses..... | 18 |
| Non-Input-Related (Residual) Spurs..... | 18 |
| Higher-Order RF Responses..... | 19 |
| Image Rejection..... | 19 |
| IF Rejection..... | 21 |
| Linearity..... | 22 |
| Third-Order Intermodulation Distortion..... | 22 |
| Second Harmonic Distortion (Input SHI)..... | 24 |



| | |
|--|----|
| Gain Compression..... | 26 |
| Dynamic Range..... | 29 |
| Modulation..... | 30 |
| IF Amplitude Response..... | 30 |
| IF Phase Linearity (Deviation from Linear Phase)..... | 32 |
| Error Vector Magnitude (EVM) and Modulation Error Ratio (MER)..... | 34 |
| Application-Specific Modulation Quality..... | 36 |
| Measurement Speed..... | 41 |
| Amplitude Settling Time..... | 41 |
| Tuning Time..... | 41 |
| Preselector Tuning Time..... | 42 |
| Analysis Time Versus Span..... | 43 |
| Input and Output Characteristics..... | 45 |
| RF IN Front Panel Connector (PXIe-5606)..... | 45 |
| NOISE SOURCE Front Panel Connector (PXIe-5606)..... | 46 |
| Maximum Safe Continuous RF Power..... | 46 |
| Voltage Standing Wave Ratio (VSWR) of RF Input..... | 46 |
| IF OUT Front Panel Connector (PXIe-5606)..... | 46 |
| LO IN and LO OUT Front Panel Connectors (PXIe-5606)..... | 47 |
| LO Output (PXIe-5653)..... | 48 |
| Power Requirements..... | 48 |
| Calibration..... | 48 |
| PXIe-5653 LO Specifications..... | 48 |
| Single Sideband (SSB) Phase Noise (LO1)..... | 49 |
| Single Sideband (SSB) Phase Noise (LO2)..... | 51 |
| Single Sideband (SSB) Phase Noise (LO3)..... | 52 |
| PXIe-5653 Frequency Lock Time..... | 53 |
| PXIe-5653 Frequency Settling Time..... | 53 |
| PXIe-5606 Downconverter Specifications..... | 54 |
| Instantaneous Bandwidth..... | 54 |
| IF Frequencies..... | 54 |
| Amplitude Range..... | 55 |
| Display Average Noise Level..... | 55 |
| Downconverter Gain Accuracy..... | 57 |
| Downconverter Conversion Gain..... | 57 |
| Spurious Response Level..... | 57 |
| Image and IF Rejection..... | 58 |
| Linearity and Dynamic Range Specifications..... | 58 |
| Measurement Configuration Speed..... | 58 |
| PXIe-5624 IF Digitizer Module Specifications..... | 58 |
| IF IN..... | 58 |
| PFI 0 (Programmable Function Interface)..... | 58 |
| CLK IN..... | 59 |
| CLK OUT..... | 59 |
| Environment..... | 60 |
| Operating Environment..... | 60 |
| Storage Environment..... | 60 |
| Shock and Vibration..... | 60 |

| | |
|--|----|
| Physical Characteristics..... | 60 |
| Compliance and Certifications..... | 61 |
| Safety Compliance Standards..... | 61 |
| Electromagnetic Compatibility..... | 61 |
| Product Certifications and Declarations..... | 62 |
| Environmental Management..... | 62 |

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Typical-95* specifications describe the performance met by 95% ($\approx 2\sigma$) of models with a 95% confidence.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are *Warranted* unless otherwise noted.

Conditions

Warranted specifications are valid under the following conditions unless otherwise noted.

- Over ambient temperature ranges of 0 °C to 55 °C.
- 30 minutes warm-up time.
- Calibration cycle is maintained and individual modules are calibrated.
- Chassis fan speed is set to high. In addition, NI recommends using slot blockers and EMC filler panels in empty module slots to minimize temperature drift and reduce emissions.
- The PXIe-5606, PXIe-5624, and PXIe-5653 are used as the downconverter, digitizer, and LO source, respectively.
- The PXIe-5653 onboard 4 GHz LO2 OUTPUT is used, after dividing by 2, as the Sample Clock for the PXIe-5624.
- Modules are connected with NI cables as shown in the *NI PXIe-5668R Getting Started Guide*.
- NI-RFSA instrument driver is used.
- Self-calibration is performed after the specified warm-up period has completed.
- For the PXIe-5606, the **Channel Coupling** property is set to DC Coupled for RF tuned frequencies less than 16 kHz and is set to AC Coupled for downconverter center frequencies greater than or equal to 16 kHz. For center frequencies less than 16 kHz,

remove the DC block accessory from the PXIe-5606 RF IN connector to measure as low as 20 Hz.



Note The PXIe-5606 has an external DC block. Components in the PXIe-5606 can be damaged when DC signals are applied directly to the RF IN connector. The PXIe-5606 ships with a 2.92 mm DC block attached to the RF IN connector to prevent damage to the device when a DC input signal is present. The DC block must be removed to make measurements at frequencies less than 16 kHz. NI recommends that you keep the DC block attached to the RF IN connector for all measurements at frequencies greater than or equal to 16 kHz to maximize the accuracy of the device. Refer to the *PXIe-5668 Getting Started Guide* on ni.com/manuals for more information about reinstalling the DC block for the PXIe-5606.

Typical specifications are valid under the following condition unless otherwise noted.

- Over ambient temperature ranges of $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$

Frequency

Frequency range

| | |
|--------------------------------|-------------------|
| PXIe-5668 14 GHz VSA | 20 Hz to 14 GHz |
| PXIe-5668 26.5 GHz VSA | 20 Hz to 26.5 GHz |
| Tuning resolution ² | 533 nHz |

Bandwidth

Equalized Bandwidth

Table 1. PXIe-5668 Equalized Bandwidth

| Frequency Range ³ | RF VSA Bandwidth Configuration | Equalized Bandwidth |
|------------------------------|--------------------------------|---------------------|
| >10 MHz to 3.41 GHz | 80 MHz (Standard) | 80 MHz |
| | 200 MHz (Optional) | 200 MHz |
| | 320 MHz (Optional) | 320 MHz |


¹ The PXIe-5668 maximum center frequency is either 14 GHz or 26.5 GHz depending on the hardware option you purchased.

² *Tuning resolution* refers to the digital downconversion (DDC) tuning resolution.

³ The PXIe-5668 maximum center frequency is either 14 GHz or 26.5 GHz depending on the hardware option purchased.

Table 1. PXIe-5668 Equalized Bandwidth (Continued)

| Frequency Range ³ | RF VSA Bandwidth Configuration | Equalized Bandwidth |
|------------------------------|--------------------------------|---------------------|
| >3.41 GHz to 14 GHz | 80 MHz (Standard) | 80 MHz |
| | 200 MHz (Optional) | 200 MHz |
| | 320 MHz (Optional) | 320 MHz |
| >3.6 GHz to 14 GHz | 765 MHz (Optional) | 765 MHz |
| >14 GHz to 26.5 GHz | 80 MHz (Standard) | 80 MHz |
| | 200 MHz (Optional) | 200 MHz |
| | 320 MHz (Optional) | 320 MHz |
| | 765 MHz (Optional) | 765 MHz |

 **Note** Equalization is performed by digital filters in the digitizer. The IF through path is limited to either 80 MHz, 200 MHz, 320 MHz, or 765 MHz, depending on the option purchased. IF response self-calibration is performed with the preselector disabled. When using the preselector on the PXIe-5606, the signal is not equalized.


Resolution Bandwidth

Bandwidth range

| | |
|----------|---|
| Standard | <1 Hz to 80 MHz (typical) |
| Optional | <1 Hz to 200 MHz (typical) or <1 Hz to 320 MHz (typical) ⁴ |

Selectivity, 60 dB : 3 dB ratio

| | |
|-------------------------------|---------------|
| Flat Top window | 2.5 (typical) |
| 7-term Blackman-Harris window | 4.1 (typical) |

 **Note** These additional window types are supported: Uniform, Hanning, Hamming, Blackman-Harris, Exact Blackman, Blackman, Flat Top, 4-term Blackman-Harris, Low Side Lobe, Gaussian, and Kaiser-Bessel.

Dither

Dithering adds band-limited noise in the analog signal path to help reduce the quantization effects of the ADC and improve spectral performance. When you enable dithering, the


³ The PXIe-5668 maximum center frequency is either 14 GHz or 26.5 GHz depending on the hardware option purchased.

⁴ Available bandwidth range depends on hardware option purchased.

maximum signal level that can be present at the IF port on the PXIe-5624 is reduced up to 2 dB. The maximum IF input power with dither disabled is 8 dBm, and the maximum IF input power level with dither enabled is 6 dBm. When dithering is enabled, the I/Q data is dithered even if the dither signal is not visible within the displayed spectrum. The dither signal on the device may appear in the I/Q data for large I/Q rates, as shown in the following table.

Table 2. PXIe-5668 Dither Signal Conditions

| IF Filter | Minimum I/Q Rate with 25 MHz Dither Cutoff Frequency | Minimum I/Q Rate with 50 MHz Dither Cutoff Frequency |
|-----------|--|--|
| 300 kHz | >348 MS/s | >298 MS/s |
| 5 MHz | >330 MS/s | >280 MS/s |
| 100 MHz | >325 MS/s | >275 MS/s |
| 320 MHz | Not present | Not present |
| 765 MHz | 500 MS/s for 800 MHz FPGA image ⁵ | 500 MS/s for 800 MHz FPGA image ⁵ |



Note The dither signal is filtered out by NI-RFSA when calling the niRFSA Read Power Spectrum VI, but it may still be present when performing an I/Q acquisition measurement. This can affect the data displayed when using zero span measurements and when processing I/Q data over sampled signals. The dither signal can also cause an I/Q power edge trigger error.

Frequency Reference

Internal Frequency Reference⁶

| | |
|------------------------------|--|
| Frequency | 10 MHz |
| Initial calibration accuracy | $\pm 50 \times 10^{-9}$ over a temperature range from 15 °C to 35 °C |
| Temperature stability | |
| 15 °C to 35 °C | $\pm 10 \times 10^{-9}$ (maximum) |
| 0 °C to 55 °C | $\pm 50 \times 10^{-9}$ |

⁵ Dither signal not present for 400 MHz FPGA image.

Aging after 30 days of continuous operation

| | |
|----------|---|
| Per day | $\pm 0.5 \times 10^{-9}$ (maximum) |
| Per year | $\pm 100 \times 10^{-9}$ (maximum) |
| Accuracy | <i>Initial Calibration Accuracy</i> \pm <i>Aging</i> \pm <i>Temperature Stability</i> |

External Frequency Reference Input⁸

| | |
|--|---|
| Frequency | 5 MHz to 100 MHz in 1 MHz steps |
| Lock range | $\pm 0.2 \times 10^{-6}$ |
| Peak-to-peak amplitude (Vpk-pk) | 0.5 V to 2.0 V into 50 Ω (≥ 1 V recommended) |
| Peak-to-peak absolute maximum amplitude (Vpk-pk) | 5 V |
| Input impedance | 50 Ω , nominal, AC coupled |
| Connector | SMA |

REF OUT 10 MHz reference output⁷

| | |
|---------------------------------|--|
| Accuracy | 10 MHz * <i>Frequency Reference Accuracy</i> |
| Peak-to-peak amplitude (Vpk-pk) | |
| Maximum | 2 V into 50 Ω |
| Typical | 1.2 V into 50 Ω |
| Minimum | 0.71 V into 50 Ω |
| Coupling | AC coupled |
| Connector | SMA |

REF OUT 100 MHz reference output⁸

| | |
|---------------------------------|---|
| Accuracy | 100 MHz * <i>Frequency Reference Accuracy</i> |
| Peak-to-peak amplitude (Vpk-pk) | |
| Maximum | 2 V into 50 Ω |
| Typical | 1.0 V into 50 Ω |
| Minimum | 0.71 V into 50 Ω |
| Coupling | AC coupled |
| Connector | SMA |

⁶ The PXIe-5653 reference oscillator determines this specification.

⁷ The PXIe-5653 10 MHz reference oscillator output determines this specification. System frequency accuracy error is equal to $Y * (f/10 \text{ MHz})$, where Y is equal to the 10 MHz frequency error and f is equal to the frequency. For example, a frequency accuracy error at 20 MHz equals twice the 10 MHz frequency accuracy error.

⁸ The PXIe-5653 reference oscillator determines this specification.

Spectral Purity

Single Sideband (SSB) Phase Noise at 800 MHz

Table 3. SSB Phase Noise (dBc/Hz, Typical)

| Offset | Phase Noise (dBc/Hz) | |
|---------|----------------------|---------------|
| | 23 °C ± 5 °C | 0 °C to 55 °C |
| 10 Hz | — | -87 (nominal) |
| 100 Hz | -106 | -105 |
| 1 kHz | -129 | -127 |
| 10 kHz | -129 | -128 |
| 100 kHz | -128 | -127 |
| 1 MHz | -140 | -140 |


 **Note** Phase noise values use PXIe-5653 internal frequency reference, PXIe-5624 digitizer directly clocked, dithering enabled and the **LO YIG Main Coil Drive** property set to Normal. Refer to the following figures for phase noise performance at additional offsets, frequencies, and with the preselector enabled.

Figure 1. Phase Noise at 100 MHz, 800 MHz, 4 GHz, and 8 GHz (Nominal, Direct Clocking, Dithering Enabled, Preselector Disabled, and Spurs Not Shown)


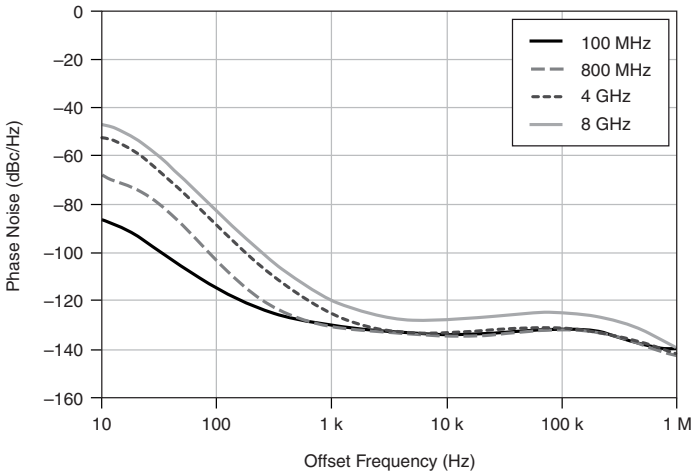


Figure 2. Phase Noise at 8 GHz
(Nominal, Direct Clocking, Dithering Enabled, and Spurs Not Shown)

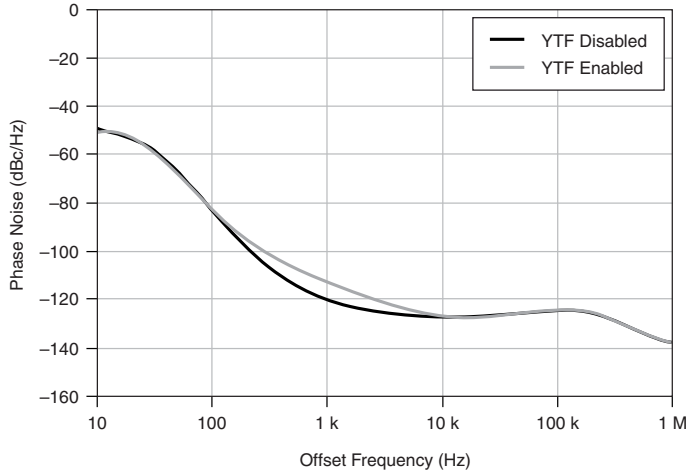


Residual FM (RMS) at 800 MHz

10 Hz to 10 kHz

<0.5 Hz, typical

AM Noise

Figure 3. AM Noise for Carrier Frequencies of 100 MHz, 800 MHz, 4 GHz, and 8 GHz
(Nominal, Spurs Not Shown)

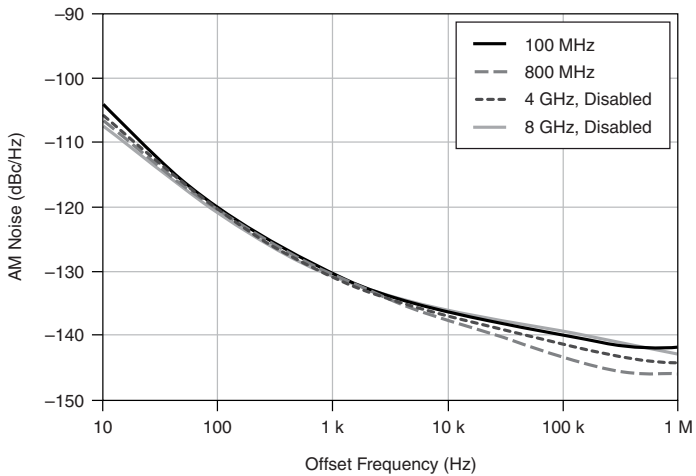

Amplitude

Amplitude Range

| | |
|----------------------|---|
| Amplitude range | <i>Average Noise Level to +30 dBm (nominal)⁹</i> |
| RF input attenuation | |
| Electronic | 0 dB to 30 dB in 1 dB steps (20 Hz to 3.6 GHz) |
| Mechanical | 0 dB to 75 dB in 5 dB steps (20 Hz to 26.5 GHz) |

Display Average Noise Level

Table 4. PXIe-5668 Display Average Noise Level, Preamplifier Disabled and Preselector Disabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| 20 Hz to 200 kHz | — | — | — | -92 |
| >200 kHz to 10 MHz | -151 | -153 | -150 | -152 |
| >10 MHz to 100 MHz | -154 | -155 | -153 | -155 |
| >100 MHz to 300 MHz | -155 | -157 | -155 | -157 |
| >300 MHz to 1.7 GHz | -154 | -157 | -154 | -156 |
| >1.7 GHz to 2.8 GHz | -151 | -154 | -151 | -154 |
| >2.8 GHz to 3.6 GHz | -149 | -151 | -149 | -150 |
| >3.6 GHz to 5 GHz | -153 | -157 | -152 | -157 |

⁹ Refer to the *Maximum Safe Continuous RF Power* section for the lower amplitude range limit under specific conditions.

Table 4. PXIe-5668 Display Average Noise Level, Preamplicifier Disabled and Preselector Disabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| >5 GHz to 14 GHz | -153 | -156 | -151 | -156 |
| >14 GHz to 17 GHz | -147 | -150 | -145 | -148 |
| >17 GHz to 24 GHz | -150 | -154 | -150 | -152 |
| >24 GHz to 26.5 GHz | -148 | -150 | -146 | -149 |


 **Note** Values are based on input-terminated, 0 dB RF attenuation for center frequency ≥ 10 MHz, 300 kHz, 5 MHz, 100 MHz, and 320 MHz IF filter, ≤-50 dBm reference level, and >10 averages. Log average noise level is normalized to a 1 Hz noise bandwidth.

Table 5. PXIe-5668 Display Average Noise Level, Preamplicifier Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| 10 MHz to 30 MHz | -164 | -167 | -163 | -166 |
| >30 MHz to 100 MHz | -165 | -168 | -164 | -166 |
| >100 MHz to 300 MHz | -167 | -169 | -166 | -166 |
| >300 MHz to 1.7 GHz | -165 | -167.5 | -165 | -167 |
| >1.7 GHz to 2.8 GHz | -164 | -166 | -163 | -165 |

Table 5. PXIe-5668 Display Average Noise Level, Preamplifier Enabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| >2.8 GHz to 3.6 GHz | -163 | -165 | -162 | -164 |


 **Note** Values are based on input-terminated, 0 dB RF attenuation, 300 kHz, 5 MHz, 100 MHz, and 320 MHz IF filter, ≤-50 dBm reference level, and >10 averages. Log average noise level normalized to a 1 Hz noise bandwidth.

Table 6. PXIe-5668 Display Average Noise Level, Preselector Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| >3.6 GHz to 5 GHz | -149 | -152 | -149 | -152 |
| >5 GHz to 14 GHz | -149 | -152.5 | -149 | -152 |
| >14 GHz to 17 GHz | -143 | -148 | -144 | -148 |
| >17 GHz to 22 GHz | -146 | -150 | -146 | -150 |
| >22 GHz to 24 GHz | -145 | -149 | -144 | -149 |
| >24 GHz to 26.5 GHz | -143 | -149 | -142 | -149 |



 **Note** Values are based on input-terminated, 0 dB RF attenuation, 300 kHz, 5 MHz, and 100 MHz IF filter, ≤-50 dBm reference level, and >10 averages. Log average noise level normalized to a 1 Hz noise bandwidth.

Table 7. PXIe-5668 Display Average Noise Level, 765 MHz Bandwidth

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|------------------------|------------------|------------------------|------------------|
| | Specification (dBm/Hz) | Typical (dBm/Hz) | Specification (dBm/Hz) | Typical (dBm/Hz) |
| >3.6 GHz to 5 GHz | -154 | -157 | -153 | -156 |
| >5 GHz to 14 GHz | -153 | -156 | -152 | -155 |
| >14 GHz to 17 GHz | -146 | -150 | -145 | -150 |
| >17 GHz to 24 GHz | -148 | -154 | -148 | -153 |
| >24 GHz to 26.5 GHz | -147 | -154 | -146 | -150 |

 **Note** Values are based on input-terminated, 0 dB RF attenuation, 765 MHz filter, ≤-50 dBm reference level, and >10 averages. Log average noise level normalized to a 1 Hz noise bandwidth.

Amplitude Accuracy

Frequency Response

Table 8. PXIe-5668 Frequency Response, Preamplifier Disabled and Preselector Disabled

| Center Frequency | 23 °C ± 5 °C | 0 °C to 55 °C |
|---------------------|--------------|---------------|
| | Typical (dB) | Typical (dB) |
| 10 MHz to 100 MHz | ±0.06 | ±0.09 |
| >100 MHz to 300 MHz | ±0.09 | ±0.11 |
| >300 MHz to 1.7 GHz | ±0.13 | ±0.18 |
| >1.7 GHz to 2.8 GHz | ±0.12 | ±0.38 |

Table 8. PXIe-5668 Frequency Response, Preamplifier Disabled and Preselector Disabled (Continued)

| Center Frequency | 23 °C ± 5 °C | 0 °C to 55 °C |
|---------------------|--------------|---------------|
| | Typical (dB) | Typical (dB) |
| >2.8 GHz to 3.6 GHz | ±0.12 | ±0.38 |



 **Note** Frequency response is measured relative to the 612.5 MHz calibration tone frequency. Values are based on 100 MHz IF filter for center frequency ≥100 MHz, 300 kHz IF filter for center frequency <100 MHz, signal-to-noise ratio >20 dB, and using the automatic calibration correction of the NI-RFSA instrument driver within ±5 °C of the temperature at the last calibration. RF attenuation is 20 dB for frequencies <10 MHz and is 10 dB for frequencies >10 MHz.

Table 9. PXIe-5668 Frequency Response, Preamplifier Enabled

| Center Frequency | 23 °C ± 5 °C | 0 °C to 55 °C |
|---------------------|--------------|---------------|
| | Typical (dB) | Typical (dB) |
| 10 MHz to 100 MHz | ±0.15 | ±0.15 |
| >100 MHz to 300 MHz | ±0.10 | ±0.10 |
| >300 MHz to 1.7 GHz | ±0.02 | ±0.10 |
| >1.7 GHz to 2.8 GHz | ±0.13 | ±0.08 |
| >2.8 GHz to 3.6 GHz | ±0.14 | ±0.26 |

 **Note** Frequency response is measured relative to the 612.5 MHz calibration tone frequency. Values are based on a 100 MHz filter for center frequency ≥100 MHz, 300 kHz IF filter for center frequency <100 MHz, signal-to-noise ratio >20 dB, and using automatic calibration correction of the NI-RFSA instrument driver within ±5 °C of the temperature at the last calibration. RF attenuation is 10 dB for frequencies >10 MHz.

Absolute Amplitude Accuracy

Table 10. PXIe-5668 Absolute Amplitude Accuracy, Preamplifier Disabled and Preselector Disabled

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| 612.5 MHz | ±0.57 | ±0.28 | ±0.21 | ±0.75 | ±0.37 |
| >10 MHz to 100 MHz | ±0.66 | ±0.35 | ±0.27 | ±0.85 | ±0.46 |
| >100 MHz to 300 MHz | ±0.68 | ±0.38 | ±0.30 | ±0.87 | ±0.44 |
| >300 MHz to 1.7 GHz | ±0.72 | ±0.35 | ±0.34 | ±0.96 | ±0.55 |
| >1.7 GHz to 2.8 GHz | ±0.73 | ±0.33 | ±0.25 | ±0.87 | ±0.44 |
| >2.8 GHz to 3.6 GHz | ±0.73 | ±0.42 | ±0.33 | ±1.29 | ±0.75 |
| >3.6 GHz to 8.5 GHz | ±0.82 | ±0.47 | ±0.40 | ±1.70 | ±1.07 |
| >8.5 GHz to 14 GHz | ±0.91 | ±0.56 | ±0.48 | ±2.08 | ±1.35 |
| >14 GHz to 17 GHz | ±0.94 | ±0.58 | ±0.48 | ±1.98 | ±1.27 |
| >17 GHz to 20 GHz | ±1.19 | ±0.76 | ±0.64 | ±2.32 | ±1.52 |

Table 10. PXIe-5668 Absolute Amplitude Accuracy, Preamplifier Disabled and Preselector Disabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| >20 GHz to 26.5 GHz | ±1.50 | ±1.00 | ±0.83 | ±2.99 | ±1.98 |

Values are based on -10 dBm to -50 dBm reference level, 100 MHz IF filter for center frequency ≥100 MHz, 300 kHz IF filter for center frequency <100 MHz, and using automatic calibration correction of the NI-RFSA instrument driver within ±5 °C of the temperature at the last calibration. RF attenuation is 20 dB for frequencies <10 MHz and is 10 dB for frequencies >10 MHz.

The absolute amplitude accuracy is measured at the center frequency. The absolute amplitude accuracy measurements are made after the hardware has settled. The high band to low band signal path transitions can take up to 200 ms for hardware to settle to within 0.1 dB of the final amplitude.

Table 11. PXIe-5668 Absolute Amplitude Accuracy, Preamplifier Enabled

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| 612.5 MHz | ±0.96 | ±0.66 | ±0.56 | ±1.95 | ±1.75 |
| >10 MHz to 100 MHz | ±1.16 | ±0.80 | ±0.70 | ±2.8 | ±2.00 |
| >100 MHz to 300 MHz | ±1.08 | ±0.80 | ±0.70 | ±2.30 | ±1.90 |
| >300 MHz to 1.7 GHz | ±1.0 | ±0.78 | ±0.65 | ±2.30 | ±1.90 |
| >1.7 GHz to 2.8 GHz | ±1.15 | ±0.68 | ±0.60 | ±2.30 | ±1.90 |

Table 11. PXIe-5668 Absolute Amplitude Accuracy, Preamplifier Enabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| >2.8 GHz to 3.6 GHz | ±1.16 | ±0.65 | ±0.58 | ±2.20 | ±1.70 |

Values are based on -20 dBm to -50 dBm reference level, 100 MHz IF filter for center frequency ≥100 MHz, 300 kHz IF filter for center frequency <100 MHz, and using automatic calibration correction of the NI-RFSA instrument driver within ±5 °C of the temperature at the last calibration. RF attenuation is 20 dB for frequencies <10 MHz and is 10 dB for frequencies >10 MHz.

The absolute amplitude accuracy is measured at the center frequency. The absolute amplitude accuracy measurements are made after the hardware has settled. The high band to low band signal path transitions can take up to 200 ms for hardware to settle to within 0.1 dB of the final amplitude.

Table 12. PXIe-5668 Absolute Amplitude Accuracy, Preselector Enabled

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| >3.6 GHz to 8.5 GHz | ±1.60 | ±1.08 | ±0.84 | ±2.80 | ±1.69 |
| >8.5 GHz to 14 GHz | ±1.51 | ±0.98 | ±0.73 | ±2.48 | ±1.50 |
| >14 GHz to 17 GHz | ±1.60 | ±1.09 | ±0.85 | ±2.45 | ±1.54 |
| >17 GHz to 20 GHz | ±2.11 | ±1.42 | ±1.08 | ±3.24 | ±2.01 |

Table 12. PXIe-5668 Absolute Amplitude Accuracy, Preselector Enabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | | 0 °C to 55 °C | |
|---------------------|--------------------|---------|--------------|--------------------|--------------|
| | Specification (dB) | 2σ (dB) | Typical (dB) | Specification (dB) | Typical (dB) |
| >20 GHz to 26.5 GHz | ±2.31 | ±1.61 | ±1.26 | ±3.02 | ±1.99 |

Values are based on -10 dBm to -50 dBm reference level, 10 dB RF attenuation, 100 MHz IF filter, and using the automatic calibration correction of the NI-RFSA instrument driver within ±5 °C of a self-calibration.

The absolute amplitude accuracy is measured at the center frequency. The absolute amplitude accuracy measurements are made after the hardware has settled. The high band to low band signal path transitions can take up to 200 ms for hardware to settle to within 0.1 dB of the final amplitude.

Spurious Responses

Non-Input-Related (Residual) Spurs¹⁰

Table 13. PXIe-5668 Non-Input-Related (Residual) Spurs, Preselector Disabled (23 °C ± 5 °C)

| Frequency | Specification (dBm) | Typical (dBm) |
|---------------------|---------------------|---------------|
| 100 MHz to 3.6 GHz | -110 | -115 |
| >3.6 GHz to 11 GHz | -110 | -115 |
| >11 GHz to 26.5 GHz | -97 | -105 |

Table 14. PXIe-5668 Non-Input-Related (Residual) Spurs, Preselector Disabled (23 °C ± 5 °C), 100 MHz Instantaneous Bandwidth (BW) Path

| Frequency | Specification (dBm) | Typical (dBm) |
|--------------------|---------------------|---------------|
| 100 MHz to 3.6 GHz | -99 | -102 |
| >3.6 GHz to 11 GHz | -102 | -105 |

¹⁰ Non-input-related spurs (residual spurs) are the responses observed when no input signal is present. The non-input-related spur values are based on ambient temperature of 23 °C ± 5 °C, RF input terminated, 0 dB RF attenuation, and -60 dBm reference level using 300 kHz and 5 MHz IF bandwidth.

Table 14. PXIe-5668 Non-Input-Related (Residual) Spurs, Preselector Disabled (23 °C ± 5 °C), 100 MHz Instantaneous Bandwidth (BW) Path (Continued)

| Frequency | Specification (dBm) | Typical (dBm) |
|---------------------|---------------------|---------------|
| >11 GHz to 24 GHz | -92 | -98 |
| >24 GHz to 26.5 GHz | -91 | -95 |

Higher-Order RF Responses¹¹

Table 15. PXIe-5668 Higher-Order RF Responses (23 °C ± 5 °C, Typical)

| Center Frequency | Higher-Order RF Responses (dBc) |
|---------------------|---------------------------------|
| 100 MHz to 3.6 GHz | -47 |
| >3.6 GHz to 14 GHz | -92 |
| >14 GHz to 26.5 GHz | -92 |



Note The higher-order RF responses ($n > 1$) are measured greater than 10 MHz offset from the carrier signal at a mixer level of -10 dBm for center frequencies less than or equal to 3.6 GHz and a mixer level of -40 dBm for center frequencies greater than 3.6 GHz. The preamplifier is disabled. The preselector is enabled for center frequencies greater than 3.6 GHz.

Image Rejection

Table 16. RF Image Rejection

| Center Frequency | 23 °C ± 5 °C | | 0 °C ± 55 °C | |
|--------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBc) | Typical (dBc) | Specification (dBc) | Typical (dBc) |
| 100 MHz to 3.6 GHz | -98 | -102 | -96 | -100 |
| >3.6 GHz to 14 GHz | -81 | -85 | -80 | -84 |

¹¹ Higher-order RF responses are responses resulting from RF second-order and higher-order harmonic-related spurs.

Table 16. RF Image Rejection (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C ± 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBc) | Typical (dBc) | Specification (dBc) | Typical (dBc) |
| >14 GHz to 26.5 GHz | -74 | -78 | -73 | -77 |



Note Values are based on 0 dBm input signal, 10 dB RF attenuation, and 0 dBm reference level. For frequencies less than 3.6 GHz, the IF filter is 100 MHz or 320 MHz and the preamplifier is disabled. For frequencies greater than 3.6 GHz, the preselector is enabled and the IF filter is 100 MHz.

Table 17. IF Image Rejection, Center Frequency <3.6 GHz

| | 23 °C ± 5 °C (dBc, Typical) | 0 °C ± 55 °C (dBc, Typical) |
|------------------------|-----------------------------|-----------------------------|
| Second IF (Direct) | -65 | -63 |
| Second IF (Translated) | -53 | -53 |
| Third IF (Direct) | -95 | -95 |
| Third IF (Translated) | -95 | -95 |



Note IF image rejection describes the rejection of a signal incident on the signal analyzer at the second or third mixer image frequency or at the second or third mixer image frequency, translated to the RF input frequency by the first mixer relative to the level of a signal incident at other tuned frequencies.



Note Values are based on 0 dBm input signal, 10 dB RF attenuation, 0 dBm reference level, 100 MHz or 320 MHz IF filter, and preamplifier disabled.

Table 18. Second IF Image Rejection, Center Frequency >3.6 GHz

| Preselector | 23 °C ± 5 °C (dBc, Typical) | 0 °C ± 55 °C (dBc, Typical) |
|-------------|-----------------------------|-----------------------------|
| Enabled | -93 | -93 |
| Disabled | -84 | -84 |



Note Second IF image rejection describes the rejection of a signal incident on the signal analyzer at the second mixer image frequency or at the second mixer image frequency, translated to the RF input frequency by the first mixer relative to the level of a signal incident at other tuned frequencies.



Note Values are based on 0 dBm input signal, 10 dB RF attenuation, 0 dBm reference level, and 100 MHz IF filter.

IF Rejection¹²

Table 19. IF Rejection, Center Frequency <3.6 GHz¹³

| | 23 °C ± 5 °C (dBc, Typical) | 0 °C ± 55 °C (dBc, Typical) |
|-----------|-----------------------------|-----------------------------|
| Half IF | -60 | -59 |
| First IF | -72 | -70 |
| Second IF | -74 | -74 |
| Third IF | -63 | -63 |


 **Note** Values are based on 0 dBm input signal, 10 dB RF attenuation, 0 dBm reference level, 100 MHz or 320 MHz IF filter, and preamplifier disabled.

Table 20. IF Rejection, Center Frequency >3.6 GHz, 100 MHz IF Filter¹³

| | 23 °C ± 5 °C (dBc, Typical) | 0 °C ± 55 °C (dBc, Typical) |
|-------------------------------|-----------------------------|-----------------------------|
| Half IF | -91 | -91 |
| First IF (3.6 GHz to 14 GHz) | -83 | -82 |
| First IF (14 GHz to 26.5 GHz) | -80 | -79 |
| Second IF | -83 | -83 |



 **Note** Values are based on 0 dBm input signal, 10 dB RF attenuation, and 0 dBm reference level.

Table 21. IF Rejection, Center Frequency >3.6 GHz, 320 MHz IF Filter¹³

| | 23 °C ± 5 °C (dBc, Typical) | 0 °C ± 55 °C (dBc, Typical) |
|----------|-----------------------------|-----------------------------|
| First IF | -60 | -59 |

 **Note** Values are based on 0 dBm input signal, 10 dB RF attenuation, 0 dBm reference level, and preselector disabled.

¹² Refer to the *IF Frequencies* section for the IF1, IF2, and IF3 frequency definitions.

¹³ IF rejection describes the rejection of a signal incident on the signal analyzer at a multiple or sub-multiple of the IF frequency relative to the level of a signal incident at other tuned frequencies.

Linearity

Third-Order Intermodulation Distortion

Table 22. PXIe-5668 Input Third-Order Intercept Point (IP₃), Preamplifier Disabled and YTF Disabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 10 MHz to 100 MHz | +16.0 | +19.0 | +15.0 | +17.0 |
| >100 MHz to 1 GHz | +21.0 | +24.0 | +20.0 | +23.0 |
| >1 GHz to 2 GHz | +23.0 | +26.0 | +22.0 | +25.0 |
| >2 GHz to 2.8 GHz | +23.0 | +26.0 | +22.0 | +25.0 |
| >2.8 GHz to 3.6 GHz | +25.0 | +28.0 | +24.0 | +27.0 |
| >3.6 GHz to 5 GHz | +6.0 | +13.0 | +5.0 | +12.0 |
| >5 GHz to 7.5 GHz | +10.3 | +14.0 | +5.0 | +13.0 |
| >7.5 GHz to 14 GHz | — | +19.0 | — | +19.0 |
| >14 GHz to 17 GHz | — | +19.0 | — | +17.0 |
| >17 GHz to 26.5 GHz | — | +20.0 | — | +20.0 |



Note Values are based on two -10 dBm input tones (-10 dBm equivalent mixer level) at 700 kHz apart, 0 dB RF attenuation, preamplifier disabled, -10 dBm reference level, and the 300 kHz IF filter. Specifications for frequencies greater than 3.6 GHz apply when the preselector is disabled. Mixer level is equivalent to input signal level minus RF attenuation.

Table 23. PXIe-5668 Input Third-Order Intercept Point (IP₃), Preamplicifier Disabled and YTF Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >3.6 GHz to 5 GHz | +11.0 | +19.0 | +10.0 | +18.0 |
| >5 GHz to 7.5 GHz | +11.0 | +21.0 | +14.0 | +18.0 |
| >7.5 GHz to 14 GHz | +15.5 | +22.0 | +17.0 | +21.0 |
| >14 GHz to 17 GHz | +14.0 | +22.0 | +15.0 | +19.0 |
| >17 GHz to 26.5 GHz | +17.0 | +23.5 | +19.5 | +22.0 |


 **Note** Values are based on two -10 dBm input tones (-10 dBm equivalent mixer level) at 700 kHz apart, 0 dB RF attenuation, preamplicifier disabled, -10 dBm reference level, and the 300 kHz IF filter. Mixer level is equivalent to input signal level minus RF attenuation.

Table 24. PXIe-5668 Input Third-Order Intercept Point (IP₃), Preamplicifier Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|-------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 10 MHz to 500 MHz | -16 | -14 | -18 | -16 |
| >500 MHz to 2 GHz | -14 | -13 | -16 | -14 |
| >2 GHz to 3 GHz | -12 | -9 | -13 | -9 |

Table 24. PXIe-5668 Input Third-Order Intercept Point (IP₃), Preamplifier Enabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|-------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >3 GHz to 3.6 GHz | -9 | -6 | -9 | -8 |



Note Values are based on two -30 dBm tones (-30 dBm equivalent mixer level) spaced at 700 kHz apart, 0 dB RF attenuation, preamplifier enabled, -30 dBm reference level, and the 300 kHz filter. Mixer level is equivalent to input signal level minus RF attenuation plus preamplifier gain.

Second Harmonic Distortion (Input SHI)

Table 25. PXIe-5668 Input SHI, Preamplifier Disabled, Signal Conditioning High Pass Filter (HPF) Enabled, and Preselector Enabled

| Source Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|--------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 50 MHz to 700 MHz | — | +40 | — | +35 |
| >700 MHz to 1 GHz | +70 | +75 | +69 | +74 |
| >1 GHz to 1.8 GHz | +71 | +74 | +70 | +72 |
| >1.8 GHz to 7 GHz | +62 | +68 | +61 | +66 |
| >7 GHz to 8.5 GHz | +58 | +68 | +57 | +66 |
| >8.5 GHz to 11 GHz | +58 | +70 | +57 | +68 |

Table 25. PXIe-5668 Input SHI, Preamplifier Disabled, Signal Conditioning High Pass Filter (HPF) Enabled, and Preselector Enabled (Continued)

| Source Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|----------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >11 GHz to 13.25 GHz | +58 | +70 | +57 | +68 |


 **Note** Values are based on a -10 dBm mixer level and 300 kHz IF filter. Mixer level is equivalent to input signal level minus RF attenuation. For center frequencies greater than 3.6 GHz, the preselector is enabled.

Table 26. PXIe-5668 Input SHI, Preamplifier Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 50 MHz to 100 MHz | -7 | -5 | -8 | -6 |
| >100 MHz to 300 MHz | -6 | -3 | -7 | -5 |
| >300 MHz to 1 GHz | -5 | -2 | -6 | -3 |
| >1 GHz to 1.8 GHz | -2 | +2 | -3 | -1 |



 **Note** Values are based on a -40 dBm mixer level and 300 kHz IF filter. Mixer level is equivalent to input signal level minus RF attenuation plus preamplifier gain.

Table 27. PXIe-5668 Input SHI, Preselector Disabled and Signal Conditioning HPF Disabled

| Source Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >300 MHz to 1 GHz | +63.0 | +67.0 | +61.0 | +66.0 |
| >1 GHz to 1.8 GHz | +49.0 | +53.0 | +48.0 | +52.0 |
| >1.8 GHz to 4 GHz | +25.2 | +34.0 | +25.0 | +33.0 |
| >4 GHz to 7 GHz | — | +30.0 | +25.0 | +29.0 |
| >7 GHz to 9 GHz | — | +30.0 | +24.0 | +28.0 |
| >9 GHz to 13.25 GHz | — | +35.0 | +25.5 | +31.0 |

 **Note** Values are based on a -10 dBm mixer level and 300 kHz IF filter. Mixer level is equivalent to input signal level minus RF attenuation.

Gain Compression¹⁴

Table 28. PXIe-5668 1 dB Gain Compression Level, Preamplifier Disabled and Preselector Disabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 10 MHz to 100 MHz | -1 | +1 | -2 | 0 |
| >100 MHz to 1.8 GHz | +4 | +7 | +3 | +6 |
| >1.8 GHz to 3.6 GHz | +4 | +7 | +3 | +6 |
| >3.6 GHz to 20 GHz | +3 | +6 | +3 | +5 |
| >20 GHz to 24 GHz | +6 | +9 | +5 | +8 |

Table 28. PXIe-5668 1 dB Gain Compression Level, Preamplifier Disabled and Preselector Disabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >24 GHz to 26.5 GHz | +8 | +10 | +7 | +9 |


 **Note** Values are based on a two-tone technique, tone separation greater than 1.5 times the instantaneous bandwidth, 0 dB RF attenuation, 0 dBm reference level, and 300 kHz IF filter.

Table 29. PXIe-5668 1 dB Gain Compression Level, Preamplifier Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| 10 MHz to 100 MHz | -30 | -25 | -27 | -25 |
| >100 MHz to 800 MHz | -27 | -24 | -26 | -24 |
| >800 MHz to 2 GHz | -27 | -24 | -26 | -24 |
| >2 GHz to 3 GHz | -26 | -23 | -26 | -24 |
| >3 GHz to 3.6 GHz | -24 | -20 | -25 | -21 |


 **Note** Values are based on a two-tone technique, tone separation greater than 1.5 times the instantaneous bandwidth, 0 dB RF attenuation, -30 dBm reference level, and 300 kHz IF filter.


Table 30. PXIe-5668 1 dB Gain Compression Level, Preselector Enabled

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >3.6 GHz to 7.5 GHz | +6 | +9 | +5 | +8 |
| >7.5 GHz to 11 GHz | +7 | +8 | +6 | +8 |

¹⁴ Compression of an in-band signal by an out-of-band interfering signal, referenced to the RF input.

Table 30. PXIe-5668 1 dB Gain Compression Level, Preselector Enabled (Continued)

| Center Frequency | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------------------|---------------------|---------------|---------------------|---------------|
| | Specification (dBm) | Typical (dBm) | Specification (dBm) | Typical (dBm) |
| >11 GHz to 14 GHz | +8 | +11 | +10 | +11 |
| >14 GHz to 20 GHz | +9 | +11 | +10 | +11 |
| >20 GHz to 26.5 GHz | +9 | +12 | +11 | +12 |

 **Note** Values are based on a two-tone technique, tone separation greater than 1.5 times the instantaneous bandwidth, 0 dB RF attenuation, -30 dBm reference level, and 300 kHz IF filter.

Clipping (ADC Overrange)¹⁵

Single tone, relative to the reference level 10 dB (nominal)

¹⁵ The IF power offset defaults to 0 dB.

Dynamic Range

Figure 4. PXIe-5668 RF Downconverter Dynamic Range at 1 GHz, Preamplifier Disabled (Nominal)


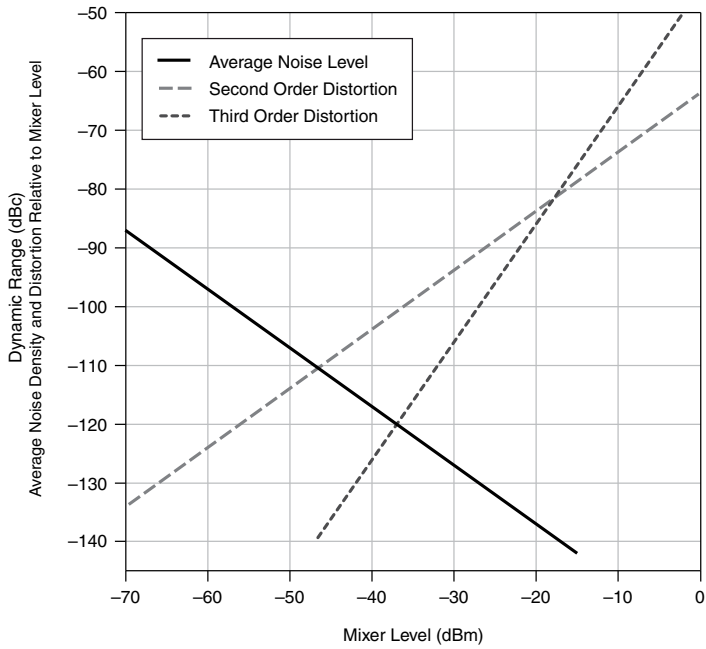


Figure 5. PXle-5668 Downconverter Dynamic Range at 20 GHz, YTF Enabled (Nominal)

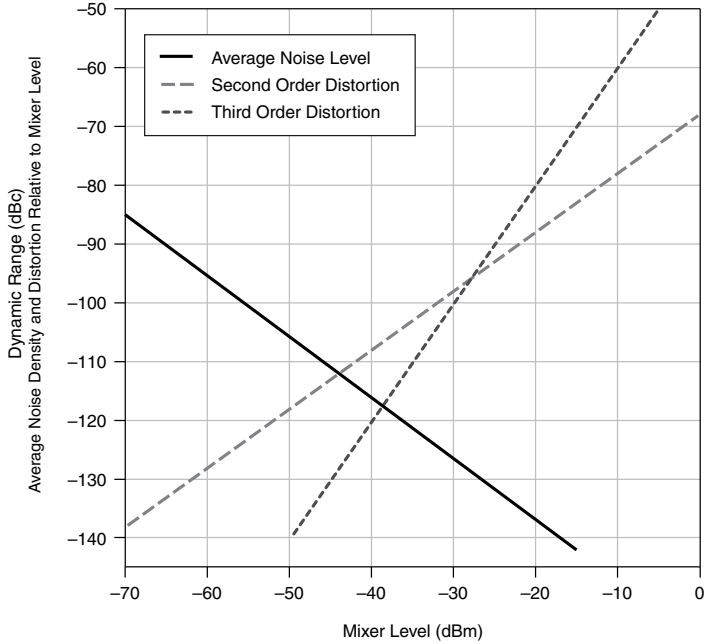

Modulation

IF Amplitude Response

Table 31. Typical PXle-5668 IF Amplitude Response (23 °C ± 5 °C, 100 MHz Path)

| IF Passband (MHz) | Center Frequency ≤ 3.41 GHz (dB) | Center Frequency ≤ 3.6 GHz (dB) | Preamplifier Enabled, Center Frequency ≤ 3.6 GHz (dB) | Center Frequency > 3.6 GHz (dB) |
|-------------------|----------------------------------|---------------------------------|---|---------------------------------|
| ≤5 | ±0.03 | ±0.04 | ±0.03 | ±0.03 |
| ≤10 | ±0.05 | ±0.07 | ±0.05 | ±0.06 |
| ≤25 | ±0.09 | ±0.15 | ±0.08 | ±0.12 |
| ≤40 | ±0.12 | ±0.22 | ±0.10 | ±0.14 |
| ≤50 | ±0.14 | ±0.25 | ±0.12 | ±0.14 |

Table 31. Typical PXIe-5668 IF Amplitude Response (23 °C ± 5 °C, 100 MHz Path)
(Continued)

| IF Passband (MHz) | Center Frequency ≤ 3.41 GHz (dB) | Center Frequency ≤ 3.6 GHz (dB) | Preamplifier Enabled, Center Frequency ≤ 3.6 GHz (dB) | Center Frequency > 3.6 GHz (dB) |
|-------------------|----------------------------------|---------------------------------|---|---------------------------------|
| ≤100 | ±0.27 | ±0.58 | ±0.30 | ±0.24 |


 **Note** IF passband response is relative to IF center frequency. The specification applies when RF center frequency is ≥200 MHz, 10 dB RF attenuation, 100 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz.

Table 32. Typical PXIe-5668 IF Amplitude Response (23 °C ± 5 °C, 320 MHz Path)

| IF Passband (MHz) | Center Frequency ≤ 3.41 GHz (dB) | Preamplifier Enabled, Center Frequency ≤ 3.41 GHz (dB) | Center Frequency > 3.41 GHz (dB) |
|-------------------|----------------------------------|--|----------------------------------|
| ≤5 | ±0.04 | ±0.03 | ±0.03 |
| ≤10 | ±0.08 | ±0.06 | ±0.05 |
| ≤25 | ±0.20 | ±0.14 | ±0.10 |
| ≤40 | ±0.28 | ±0.20 | ±0.15 |
| ≤50 | ±0.30 | ±0.22 | ±0.18 |
| ≤100 | ±0.50 | ±0.45 | ±0.38 |
| ≤320 | ±1.35 | ±1.30 | ±0.86 |



 **Note** IF passband response is relative to IF center frequency. The specification applies when RF center frequency is ≥320 MHz, 10 dB RF attenuation, 320 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz.

Table 33. Typical PXIe-5668 IF Amplitude Response (23 °C ± 5 °C, 765 MHz Path)

| IF Passband (MHz) | Center Frequency > 3.6 GHz (dB) |
|-------------------|---------------------------------|
| ≤5 | ±0.03 |
| ≤10 | ±0.05 |
| ≤25 | ±0.12 |

Table 33. Typical PXIe-5668 IF Amplitude Response (23 °C ± 5 °C, 765 MHz Path)
(Continued)

| IF Passband (MHz) | Center Frequency > 3.6 GHz (dB) |
|-------------------|---------------------------------|
| ≤40 | ±0.18 |
| ≤50 | ±0.25 |
| ≤100 | ±0.50 |
| ≤320 | ±0.75 |
| ≤765 | ±1.27 |

 **Note** IF passband response is relative to IF center frequency. The specification applies when RF center frequency is >3.6 GHz, 10 dB RF attenuation, 765 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz.

IF Phase Linearity (Deviation from Linear Phase)

Table 34. Typical PXIe-5668 Deviation from Linear Phase (Degrees) (23 °C, 100 MHz Path)

| IF Passband | Center Frequency ≤ 3.6 GHz | Preamplifier Enabled, Center Frequency ≤ 3.6 GHz | Center Frequency > 3.6 GHz |
|-------------|----------------------------|--|----------------------------|
| ≤5 MHz | ±0.03 | ±0.03 | ±0.03 |
| ≤10 MHz | ±0.08 | ±0.09 | ±0.10 |
| ≤25 MHz | ±0.45 | ±0.45 | ±0.50 |
| ≤40 MHz | ±0.90 | ±1.00 | ±0.90 |
| ≤50 MHz | ±1.30 | ±1.45 | ±1.10 |
| ≤100 MHz | ±3.50 | ±4.00 | ±1.80 |


 **Note** IF passband response is relative to IF center frequency. The specification applies when RF center frequency is ≥200 MHz, 10 dB RF attenuation, 100 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz.

Table 35. Typical PXIe-5668 Deviation from Linear Phase (Degrees) (23 °C, 320 MHz Path)

| IF Passband | Center Frequency \leq 3.41 GHz | Preamplifier Enabled, Center Frequency \leq 3.41 GHz | Center Frequency $>$ 3.41 GHz |
|----------------|----------------------------------|--|-------------------------------|
| \leq 5 MHz | \pm 0.03 | \pm 0.04 | \pm 0.04 |
| \leq 10 MHz | \pm 0.06 | \pm 0.06 | \pm 0.07 |
| \leq 25 MHz | \pm 0.32 | \pm 0.30 | \pm 0.35 |
| \leq 40 MHz | \pm 0.85 | \pm 0.70 | \pm 0.75 |
| \leq 50 MHz | \pm 1.30 | \pm 1.10 | \pm 1.00 |
| \leq 100 MHz | \pm 4.10 | \pm 4.00 | \pm 2.45 |
| \leq 320 MHz | \pm 12.5 | \pm 13.0 | \pm 8.00 |



 **Note** IF passband response is relative to IF center frequency. The specification applies when RF center frequency is \geq 320 MHz, 10 dB RF attenuation, 320 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz.

Table 36. Nominal PXIe-5668 Deviation from Linear Phase (Degrees) (23 °C, 765 MHz Path)

| IF Passband | Center Frequency $>$ 3.6 GHz (Nominal) | Center Frequency $>$ 9 GHz (Nominal) |
|----------------|--|--------------------------------------|
| \leq 5 MHz | \pm 0.04 | \pm 0.04 |
| \leq 10 MHz | \pm 0.06 | \pm 0.06 |
| \leq 25 MHz | \pm 0.25 | \pm 0.25 |
| \leq 40 MHz | \pm 0.60 | \pm 0.60 |
| \leq 50 MHz | \pm 0.90 | \pm 0.90 |
| \leq 100 MHz | \pm 2.25 | \pm 2.25 |
| \leq 320 MHz | \pm 6.00 | \pm 6.00 |

Table 36. Nominal PXIe-5668 Deviation from Linear Phase (Degrees) (23 °C, 765 MHz Path) (Continued)

| IF Passband | Center Frequency > 3.6 GHz (Nominal) | Center Frequency > 9 GHz (Nominal) |
|---|--------------------------------------|------------------------------------|
| ≤765 MHz | ±10.00 | ±16.00 |
|  Note IF passband response is relative to IF center frequency. The specification applies when RF center frequency is >3.6 GHz, 10 dB RF attenuation, 765 MHz signal path, IF equalization is enabled, and self-calibration is performed. The standard 80 MHz bandwidth option for the PXIe-5668 provides IF bandwidth up to 80 MHz. | | |

Error Vector Magnitude (EVM) and Modulation Error Ratio (MER)

Data length in the following two tables is a 1,250 symbol pseudorandom bit sequence (PRBS) at a -10 dBm power level. These results were obtained using the independent onboard clock for the PXIe-5668 with the independent Reference Clock for the PXIe-5646 Vector Signal Transceiver. The results do not include software equalization using the Modulation Toolkit. Results are the composite effect of both the PXIe-5668 and the PXIe-5646.

Table 37. 825 MHz Carrier Frequency (Nominal)¹⁶

| QAM Order | Symbol Rate (kS/s) | α_{RRC} | EVM (% RMS) | MER (dB) |
|-----------|--------------------|----------------|-------------|----------|
| 4 | 160 | 0.25 | 0.11 | 59.00 |
| | 800 | 0.21 | 0.11 | 59.35 |
| | 4,090 | 0.22 | 0.12 | 58.58 |
| 16 | 17,600 | 0.25 | 0.21 | 51.26 |
| | 32,000 | 0.25 | 0.48 | 43.93 |
| 64 | 5,360 | 0.15 | 0.09 | 57.28 |
| | 6,952 | 0.15 | 0.10 | 56.45 |
| | 40,990 | 0.22 | 0.60 | 40.92 |
| 256 | 6,952 | 0.15 | 0.09 | 56.71 |

¹⁶ NI-RFSA reference level = -7 dBm, RF attenuation = 10 dB, IF filter = 320 MHz

Table 38. 2.4 GHz Carrier Frequency (Nominal)¹⁶

| QAM Order | Symbol Rate (kS/s) | α_{RRC} | EVM (% RMS) | MER (dB) |
|------------------|---------------------------|---|--------------------|-----------------|
| 4 | 160 | 0.25 | 0.28 | 51.19 |
| | 800 | 0.25 | 0.23 | 52.66 |
| | 4,090 | 0.22 | 0.20 | 53.97 |
| 16 | 17,600 | 0.25 | 0.22 | 50.77 |
| | 32,000 | 0.25 | 0.48 | 43.90 |
| 64 | 5,360 | 0.15 | 0.14 | 53.43 |
| | 6,952 | 0.15 | 0.15 | 53.19 |
| | 40,990 | 0.22 | 0.62 | 40.79 |
| 256 | 6,952 | 0.15 | 0.13 | 53.50 |

Table 39. 5.8 GHz Carrier Frequency (Nominal)¹⁶

| QAM Order | Symbol Rate (kS/s) | α_{RRC} | EVM (% RMS) | MER (dB) |
|------------------|---------------------------|---|--------------------|-----------------|
| 4 | 160 | 0.25 | 0.63 | 44.12 |
| | 800 | 0.25 | 0.52 | 45.77 |
| | 4,090 | 0.22 | 0.45 | 46.97 |
| 16 | 17,600 | 0.25 | 0.34 | 46.82 |
| | 32,000 | 0.25 | 0.39 | 45.65 |
| 64 | 5,360 | 0.15 | 0.30 | 46.96 |
| | 6,952 | 0.15 | 0.30 | 46.87 |
| | 40,990 | 0.22 | 0.42 | 43.98 |
| 256 | 6,952 | 0.15 | 0.27 | 47.01 |


Application-Specific Modulation Quality

WLAN 802.11ac

OFDM EVM


| | |
|---|--------------------------------------|
| 80 MHz bandwidth | -49 dB (RMS) (nominal) ¹⁷ |
| 80 MHz bandwidth with channel tracking enabled (preamble and data) | -52 dB ¹⁷ |
| 160 MHz bandwidth | -44 dB (RMS) (nominal) ¹⁷ |
| 160 MHz bandwidth with channel tracking enabled (preamble and data) | -47 ¹⁷ |

Figure 6. WLAN 802.11ac RMS EVM (dB) Versus Measured Average Power (dBm)

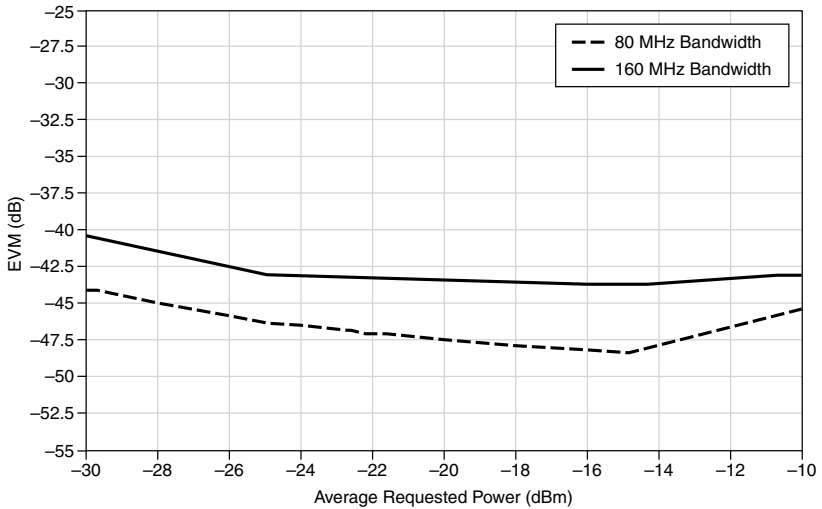

¹⁷ Conditions: RF IN = 5,800 MHz; RF attenuation = 0 dB; average input power = -30 dBm to -10 dBm; IF filter = 320 MHz; reference level = auto-level based on real-time average power measurement with optimized offset, optimized IF power offset, 20 packets, 16 OFDM data symbols; MCS = 9, 256 QAM.

Figure 7. WLAN 802.11ac RMS EVM (dB) Versus Measured Average Power (dBm), Channel Tracking Enabled

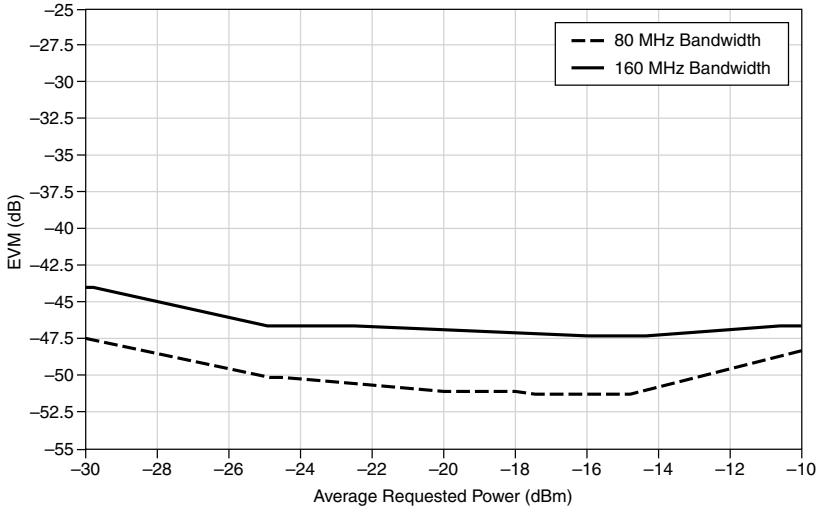

WLAN 802.11n

Table 40. 802.11n OFDM EVM (RMS) (dB), Nominal

| Frequency | 20 MHz Bandwidth | | 40 MHz Bandwidth | |
|-----------|---------------------------|---|--------------------------|---|
| | Channel Tracking Disabled | Channel Tracking Enabled, Preamble and Data | Channel Tracking Enabled | Channel Tracking Enabled, Preamble and Data |
| 2.412 GHz | -53 | -56 | -51 | -54 |
| 5.000 GHz | -51 | -53 | -50 | -52 |

Conditions: RF attenuation = 10 dB; average input power = -10 dBm; IF filter = 320 MHz; reference level = auto-level based on real-time average power measurement with -10 dB offset, 20 packets, 3/4 coding rate, 64 QAM.

WLAN 802.11a/g/j/p

Table 41. 802.11a/g/j/p OFDM EVM (RMS) (dB) (Nominal)

| Frequency | 20 MHz Bandwidth | |
|-----------|---------------------------|---|
| | Channel Tracking Disabled | Channel Tracking Enabled, Preamble and Data |
| 2.412 GHz | -55 | -57 |
| 5.000 GHz | -51 | -54 |

Conditions: RF attenuation = 10 dB; average input power = -10 dBm; IF filter = 320 MHz; reference level = auto-level based on real-time average power measurement with -10 dB offset, 20 packets, 3/4 coding rate, 64 QAM.

WLAN 802.11g

Table 42. 802.11g DSSS-OFDM EVM (RMS) (dB) (Nominal)

| Frequency | 20 MHz Bandwidth | |
|-----------|---------------------------|---|
| | Channel Tracking Disabled | Channel Tracking Enabled, Preamble and Data |
| 2.412 GHz | -54 | -56 |
| 5.000 GHz | -51 | -53 |

Conditions: RF attenuation = 10 dB; average input power = -10 dBm; IF filter = 320 MHz; reference level = auto-level based on real-time average power measurement with -10 dB offset, 20 packets, 3/4 coding rate, 64 QAM.

LTE

Table 43. SC-FDMA (Uplink FDD) EVM (RMS) (dB) (Nominal)

| Frequency | 5 MHz Bandwidth | 10 MHz Bandwidth | 20 MHz Bandwidth |
|-----------|-----------------|------------------|------------------|
| 700 MHz | -55 | -55 | -52 |
| 900 MHz | -55 | -55 | -52 |
| 1.430 GHz | -54 | -54 | -51 |
| 1.750 GHz | -53 | -53 | -51 |
| 1.900 GHz | -52 | -52 | -51 |

Table 43. SC-FDMA (Uplink FDD) EVM (RMS) (dB) (Nominal) (Continued)

| Frequency | 5 MHz Bandwidth | 10 MHz Bandwidth | 20 MHz Bandwidth |
|-----------|-----------------|------------------|------------------|
| 2.500 GHz | -51 | -51 | -50 |

Conditions: single channel uplink only, RF attenuation = 0 dB; average input power = -30 dBm to -5 dBm; IF filter = 320 MHz; reference level = auto-level based on real-time average power measurement with -5 dB offset.

Figure 8. LTE RMS EVM (dB) Versus Measured Average Power (dBm), 5 MHz Bandwidth

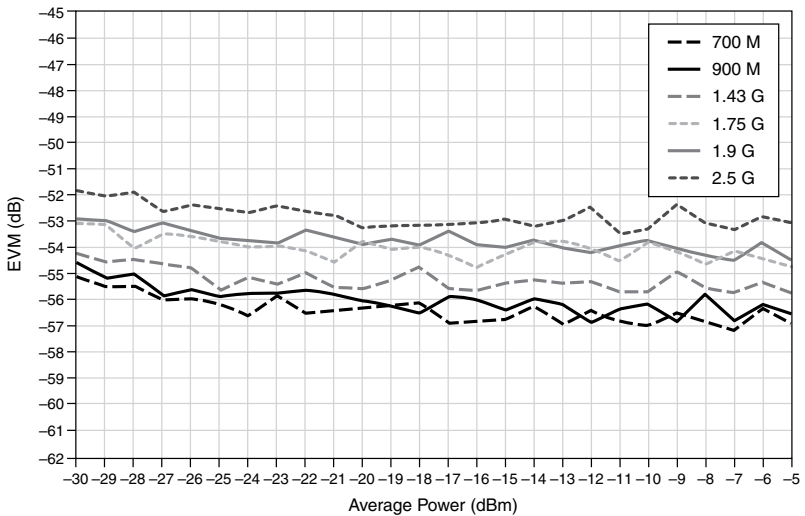


Figure 9. LTE RMS EVM (dB) Versus Measured Average Power (dBm), 10 MHz Bandwidth


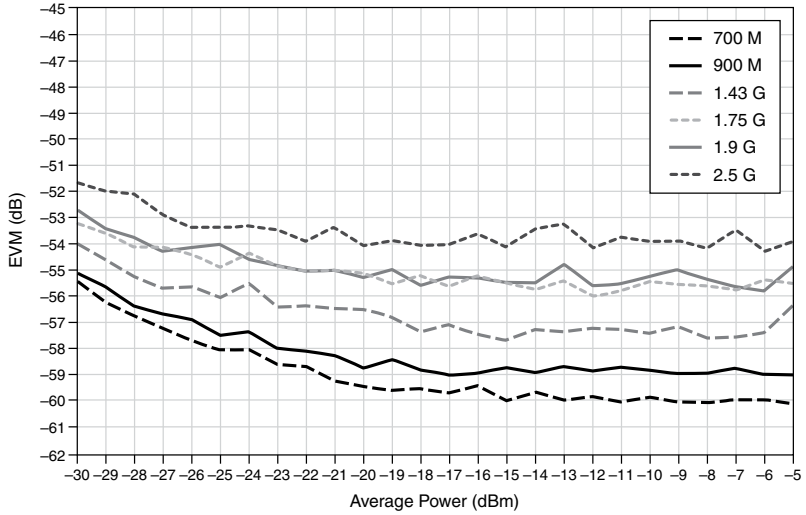


Figure 10. LTE RMS EVM (dB) Versus Measured Average Power (dBm), 20 MHz Bandwidth

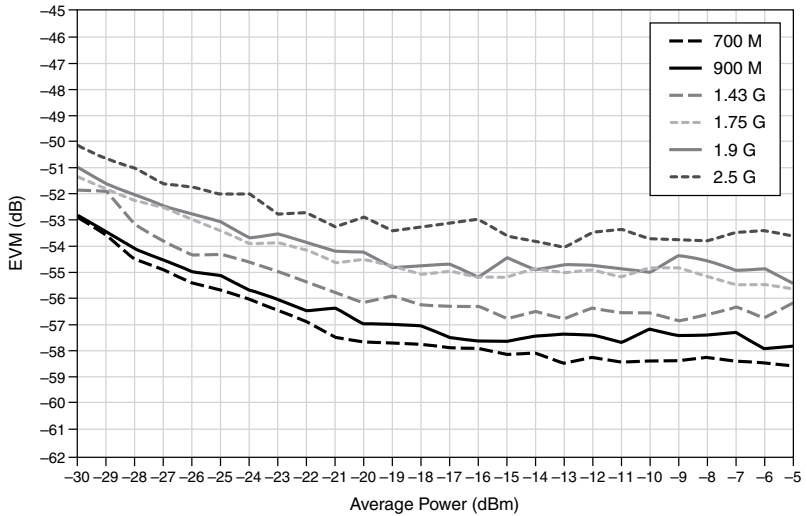

Measurement Speed

Measurement duration is made up of tuning time plus analysis time. The tuning benchmark includes programming time, frequency settling time, and amplitude settling time. Programming time partially overlaps frequency settling time and amplitude settling time. Measurement duration is dependent on the specific measurement settings used.

Amplitude Settling Time¹⁸

Table 44. PXIe-5668 Amplitude Settling Time (Nominal)

| Center Frequency | Mechanical Attenuator Stationary (μ s) | Mechanical Attenuator State Changed (ms) |
|-----------------------------|---|--|
| >100 MHz to \leq 3.6 GHz | 25 | 40 |
| >3.6 GHz to \leq 26.5 GHz | 25 | 40 |

Tuning Time

Table 45. PXIe-5668 Tuning Time (ms, Nominal)¹⁹

| Step Size | Fast Configuration ²⁰ | Normal Configuration ²¹ |
|-----------|----------------------------------|------------------------------------|
| 50 MHz | 1.8 | 5.6 |
| 75 MHz | 1.9 | 7.7 |
| 250 MHz | 2.3 | 9.3 |
| 1.0 GHz | 6.6 | 15.0 |
| 3.5 GHz | 14.5 | 19.6 |

¹⁸ Amplitude settling is within 0.1 dB.

¹⁹ Tuning times refer to tuning with a single band, for example, tuning within 0 Hz to 3.6 GHz or within 3.6 GHz to 7.5 GHz. The tuning times for tuning within the 7.5 GHz to 14 GHz band are lower than if the frequency spans multiple frequency bands. If your application uses the PXIe-5668 26.5 GHz VSA with the preselector enabled, add the preselector tuning times to the tuning times listed in this table.

²⁰ Fast Configuration refers to setting the **LO YIG Main Coil Drive** property to Fast at an accuracy of 1.0×10^{-6} of final frequency.

²¹ Normal Configuration refers to setting the **LO YIG Main Coil Drive** property to Normal at an accuracy of 0.1×10^{-6} of final frequency.

Preselector Tuning Time


Table 46. PXIe-5668 Preselector Tuning Time (Nominal)

| Center Frequency Step Size | Preselector Tuning Time (ms) ²² |
|----------------------------|--|
| ≤100 MHz | 10.5 |
| 500 MHz | 12.8 |
| 1.0 GHz | 14.1 |
| 2.0 GHz | 15.2 |
| 3.0 GHz | 16.4 |
| 3.5 GHz | 16.9 |
| 4.0 GHz | 17.5 |
| 6.0 GHz | 19.7 |
| 13.0 GHz | 27.6 |
| 22.9 GHz | 38.8 |

²² Tuning time refers to the time required to tune the preselector upwards in frequency range from 3.6 GHz to 26.5 GHz of preselector path. The time required to tune downwards in frequency can be 16 ms to 26 ms for RF center frequencies from 3.6 GHz to 7.5 GHz, 25 ms to 39 ms for RF center frequencies from 7.5 GHz to 14 GHz, and 38 ms to 62 ms for RF center frequencies from 14 GHz to 26.5 GHz.

Analysis Time Versus Span²³

Figure 11. PXIe-5668 Analysis Time, Preselector Disabled (Nominal)

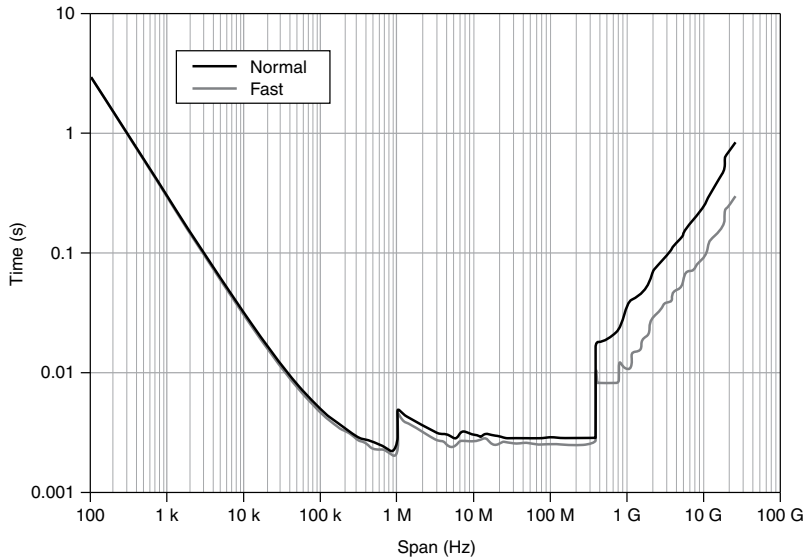

²³ Analysis time versus span was measured with a tuned frequency > 10 MHz. For spans smaller than 1 MHz, 100 frequency points were measured; above 1 MHz span, 1,000 frequency points were measured. Analysis time includes acquisition, FFT analysis, and data transfer time. For spans larger than 320 MHz, analysis time also includes tuning time. Tuning Mode refers to the setting of the **LO YIG Main Coil Drive** property to either Fast or Normal .

Figure 12. PXle-5668 Analysis Time, Preselector Enabled (Nominal)


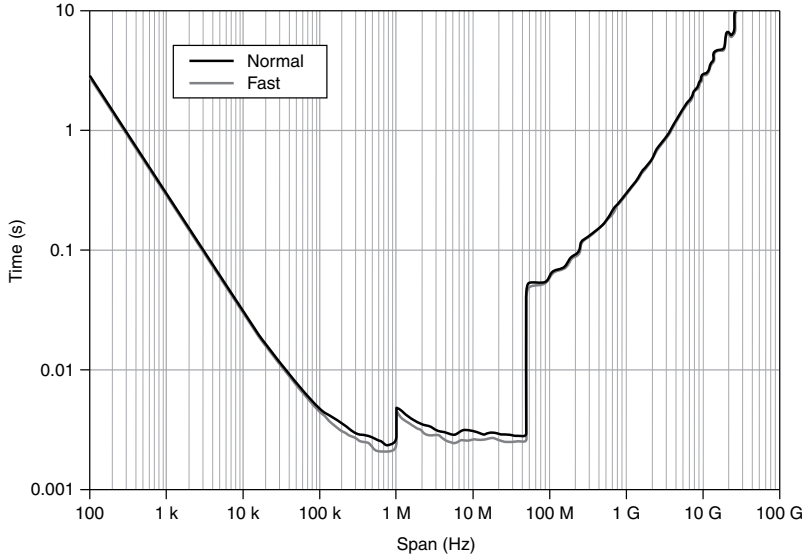


Figure 13. PXIe-5668 Analysis Time with 320 MHz and 765 MHz Bandwidth Setting for High Band (Nominal)²⁴

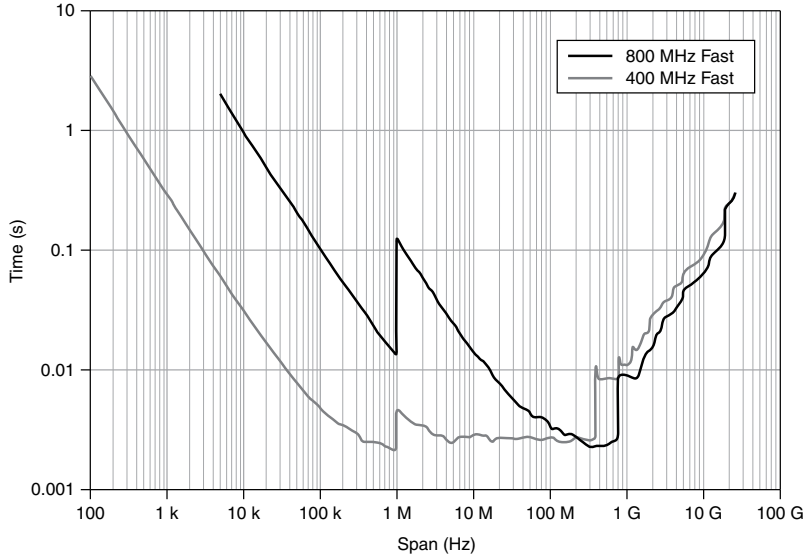

Input and Output Characteristics

RF IN Front Panel Connector (PXIe-5606)

| | |
|---|----------------------------|
| Connector | 2.92 mm female |
| Impedance | 50 Ω (nominal) |
| Coupling | AC and DC |
| Maximum safe DC input voltage, DC coupled | ± 40 VDC ²⁵ |

²⁴ Plots measured using 800 MHz and 400 MHz acquisition mode FPGA images for the PXIe-5624 digitizer. Refer to [NI RF Vector Signal Analyzers Help](#) for more information about using NI-RFSA instrument driver FPGA extensions.

²⁵ Ensure that the DC voltage at the RF IN connector of the PXIe-5606 is limited to ± 40 V even with the DC block attached to the RF IN connector. With the DC block removed, the maximum safe DC input voltage for the RF IN connector is 0 V.

NOISE SOURCE Front Panel Connector (PXIe-5606)

| | |
|------------------|---------|
| Connector | HD BNC |
| Noise source On | +28 VDC |
| Noise source Off | 0 VDC |

Maximum Safe Continuous RF Power

| | |
|-----------|---------|
| PXIe-5606 | +30 dBm |
|-----------|---------|

Voltage Standing Wave Ratio (VSWR) of RF Input

Table 47. PXIe-5606 VSWR (Nominal)

| Attenuation ²⁶ | Preselector (Enabled/ Disabled) | Center Frequency (MHz) | MAX VSWR (1 : 1) |
|---------------------------|------------------------------------|------------------------|------------------|
| 0 dB | N/A | >10 MHz to ≤3.6 GHz | 2.35 : 1 |
| | Disabled | >3.6 GHz to ≤14 GHz | 2.20 : 1 |
| | | >14 GHz to ≤26.5 GHz | 2.45 : 1 |
| | Enabled | >3.6 GHz to ≤14 GHz | 2.50 : 1 |
| | | >14 GHz to ≤26.5 GHz | 2.60 : 1 |
| ≥10 dB | N/A | >10 MHz to ≤3.6 GHz | 1.25 : 1 |
| | Disabled | >3.6 GHz to ≤14 GHz | 1.30 : 1 |
| | | >14 GHz to ≤26.5 GHz | 1.58 : 1 |
| | Enabled | >3.6 GHz to ≤14 GHz | 1.33 : 1 |
| | | >14 GHz to ≤26.5 GHz | 1.58 : 1 |

IF OUT Front Panel Connector (PXIe-5606)

| | |
|-------------|-----------------|
| Connector | SMA female |
| Impedance | 50 Ω (nominal) |
| Return loss | 15 dB (nominal) |

²⁶ Attenuation available in 1 dB steps for frequencies less than 3.6 GHz. Attenuation is available in 5 dB steps for frequencies from 20 Hz to 26.5 GHz. Based on a 90% tolerance interval and 90% confidence with k factor 2.59.

| | |
|-------------------------|--------|
| Nominal IF output level | +7 dBm |
| Output voltage | 0 V DC |

LO IN and LO OUT Front Panel Connectors (PXIe-5606)

| | |
|-----------|-----------------------|
| Connector | SMA female |
| Impedance | 50 Ω (nominal) |
| Coupling | AC |

| | |
|--------------------------|---------|
| Maximum safe power level | |
| LO1 IN | +13 dBm |
| LO2 IN | +13 dBm |
| LO3 IN | +15 dBm |
| LO1 OUT | +21 dBm |
| LO2 OUT | +17 dBm |
| LO3 OUT | +20 dBm |

| | |
|----------------------|--------|
| Maximum safe voltage | |
| LO1 IN | 25 VDC |
| LO2 IN | 12 VDC |
| LO3 IN | 24 VDC |
| LO1 OUT | 0 VDC |
| LO2 OUT | 0 VDC |
| LO3 OUT | 0 VDC |

| | |
|--------------|--------------------|
| LO frequency | |
| LO1 | 4.6 GHz to 8.3 GHz |
| LO2 | 4.0 GHz |
| LO3 | 800 MHz |

| | |
|-----------------|---|
| LO output level | |
| LO1 | +7 dBm to +8 dBm (typical, varies with frequency) |
| LO2 | +9 dBm to +10 dBm (typical) |
| LO3 | +9 dBm to +10 dBm (typical) |

LO Output (PXIe-5653)

Table 48. LO Output Level

| LO | Minimum | Nominal | Maximum |
|-------------------------------|-------------------------------|--|-------------------------------|
| LO1 (from 3.2 GHz to 8.2 GHz) | <i>Nominal Value</i> - 2.5 dB | Varies by frequency according to the following equation: $10.5 - 3\left(\frac{\text{Frequency(GHz)} - 3.2\text{GHz}}{5.0\text{GHz}}\right)(\text{dBm})$ | <i>Nominal Value</i> + 2.5 dB |
| LO1 (at 8.3 GHz) | +4 dBm | +6.5 dBm | +9 dBm |
| LO2 | +6.5 dBm | +9 dBm | +13 dBm |
| LO3 | +7 dBm | +9 dBm | +13 dBm |

Power Requirements

Table 49. PXIe-5668 Power Requirements (Voltages \pm 5%)

| Module | From +3.3 VDC | From +12 VDC | Total Power (W) |
|--------------------------|-----------------|------------------|-----------------|
| PXIe-5606 | 1.60 A (5.28 W) | 5.00 A (60.00 W) | 65.28 |
| PXIe-5624 | 2.45 A (8.09 W) | 1.95 A (23.40 W) | 31.49 |
| PXIe-5653 | 1.10 A (3.63 W) | 4.00 A (48.00 W) | 51.63 |
| PXIe-5668 (combined VSA) | — | — | 148.40 |

Calibration

Interval 2 years

PXIe-5653 LO Specifications

LO frequency

| | |
|-----|------------------------------|
| LO1 | 3.2 GHz to 8.3 GHz (nominal) |
| LO2 | 4.0 GHz (nominal) |
| LO3 | 800 MHz (nominal) |

Single Sideband (SSB) Phase Noise (LO1)

LO1 (5.4125 GHz)

Table 50. Phase Noise (dBc/Hz), PXIe-5668 Center Frequency = 800 MHz

| Offset | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------|------------------------|------------------|------------------|------------------|
| | Specification (dBc/Hz) | Typical (dBc/Hz) | Nominal (dBc/Hz) | Typical (dBc/Hz) |
| 10 Hz | — | — | <-73 | — |
| 100 Hz | <-89 | <-94 | — | <-89 |
| 1 kHz | <-118 | <-122 | — | <-119 |
| 10 kHz | <-128 | <-131 | — | <-130 |
| 100 kHz | <-125 | <-128 | — | <-127 |
| 1 MHz | <-141 | <-144 | — | <-143 |
| 5 MHz | <-155 | <-157 | — | <-155 |

Conditions: **LO YIG Main Coil Drive** property set to Normal.

LO1 (7.8125 GHz)

Table 51. Phase Noise (dBc/Hz), PXIe-5668 Center Frequency = 3.2 GHz

| Offset | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------|------------------------|------------------|------------------|------------------|
| | Specification (dBc/Hz) | Typical (dBc/Hz) | Nominal (dBc/Hz) | Typical (dBc/Hz) |
| 10 Hz | — | — | <-70 | — |
| 100 Hz | <-86 | <-92 | — | <-86 |
| 1 kHz | <-115 | <-119 | — | <-116 |
| 10 kHz | <-127 | <-130 | — | <-129 |
| 100 kHz | <-125 | <-128 | — | <-127 |
| 1 MHz | <-141 | <-144 | — | <-143 |
| 5 MHz | <-155 | <-157 | — | <-155 |

Conditions: **LO YIG Main Coil Drive** property set to Normal.

Figure 14. LO1 Phase and Amplitude Noise (AM, Nominal)²⁷


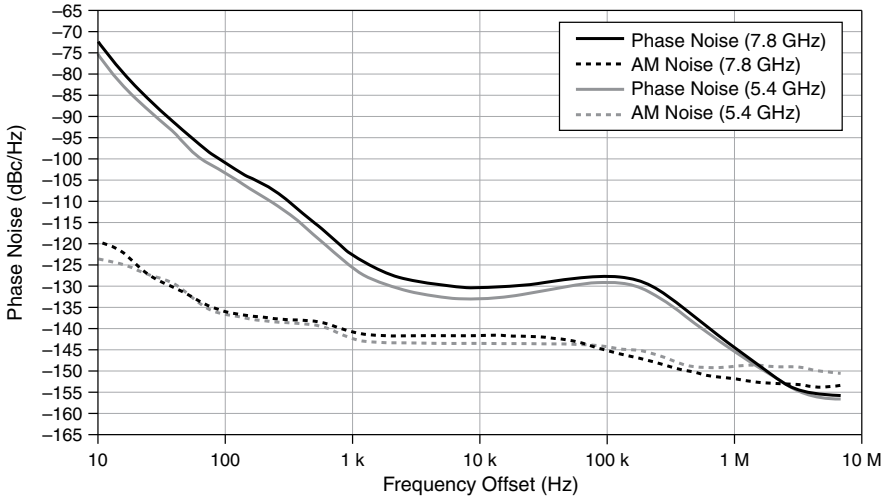


Figure 15. LO1 Phase Noise Measured Performance Comparison, Normal Tuning Versus Fast Tuning Speed²⁸

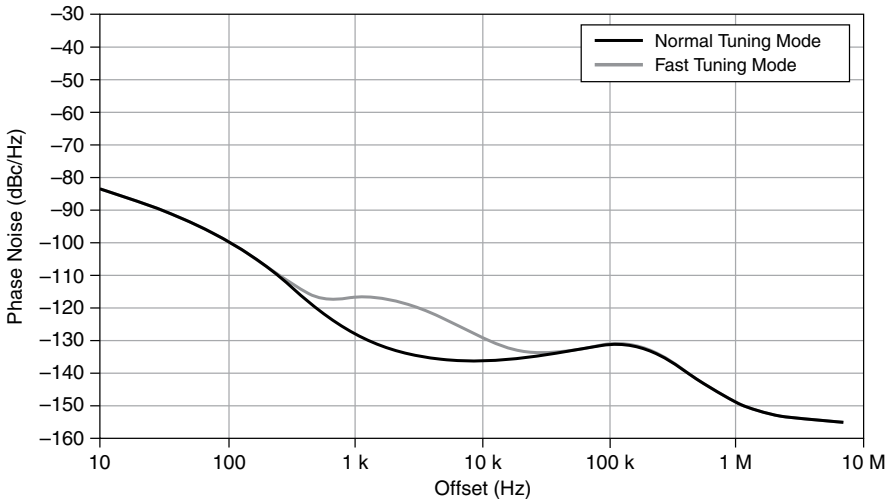

²⁷ LO1 Noise Sidebands: LO1 = 5.4125 GHz, 7.8125 GHz. Plots of measured LO1 performance (Phase Noise and AM Noise) shown without spurs.

²⁸ LO1 frequency is 5 GHz. Representative of nominal performance difference across the entire frequency range of LO1 (shown without spurs). Tuning Mode refers to the setting of the **LO YIG Main Coil Drive** property to Fast or Normal.


Single Sideband (SSB) Phase Noise (LO2)

LO2 (4 GHz)

Table 52. Noise Density, PXIe-5668 Center Frequencies > 3.6 GHz

| Offset | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------|------------------------|------------------|------------------|------------------|
| | Specification (dBc/Hz) | Typical (dBc/Hz) | Nominal (dBc/Hz) | Typical (dBc/Hz) |
| 10 Hz | — | — | <-76 | — |
| 100 Hz | <-92 | <-97 | — | <-92 |
| 1 kHz | <-121 | <-125 | — | <-122 |
| 10 kHz | <-134 | <-137 | — | <-135 |
| 100 kHz | <-134 | <-137 | — | <-135 |
| 1 MHz | <-143 | <-146 | — | <-145 |
| 5 MHz | <-155 | <-157 | — | <-155 |

Figure 16. LO2 Phase and Amplitude Noise (Nominal)²⁹

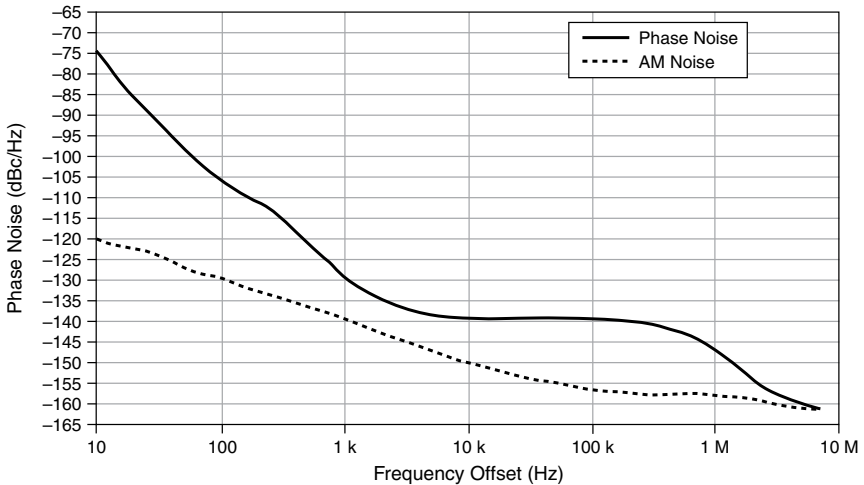

²⁹ LO2 = 4.0 GHz. Plots of measured LO2 performance (*Phase Noise* and *AM Noise*) shown without spurs.


Single Sideband (SSB) Phase Noise (LO3)

LO3 (800 MHz)

Table 53. Noise Density, PXIe-5668 Center Frequencies >3.6 GHz

| Offset | 23 °C ± 5 °C | | 0 °C to 55 °C | |
|---------|------------------------|------------------|--------------------------------|------------------|
| | Specification (dBc/Hz) | Typical (dBc/Hz) | Nominal ³⁰ (dBc/Hz) | Typical (dBc/Hz) |
| 10 Hz | — | — | <-90 | — |
| 100 Hz | <-104 | -111 | — | <-106 |
| 1 kHz | <-135 | -139 | — | <-134 |
| 10 kHz | <-148 | -152 | — | <-149 |
| 100 kHz | <-149 | -153 | — | <-150 |
| 1 MHz | <-158 | -160 | — | <-156 |
| 5 MHz | <-160 | -163 | — | <-159 |

Figure 17. LO3 Phase Noise³¹

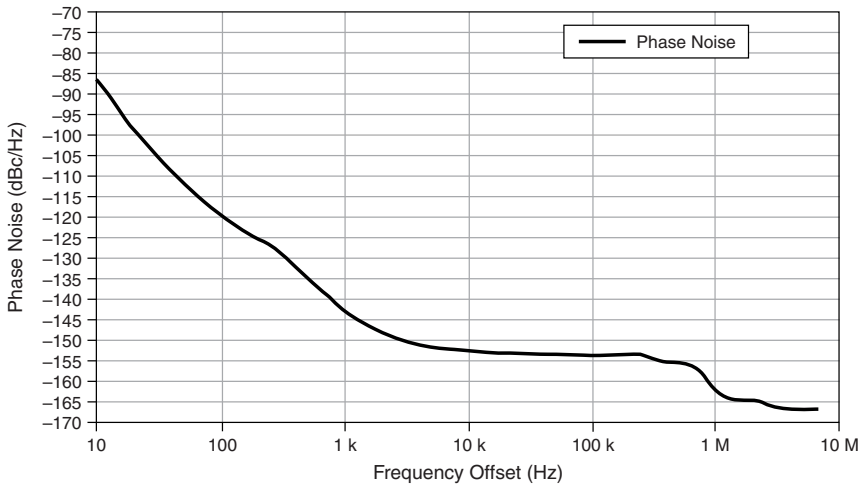

³⁰ When used in a VSA system, the nominal specification for the VSA improves significantly from this value because the VSA uses all the LOs instead of a single LO. The phase noise of other LOs is correlated to the phase noise on LO1 at low offsets, which improves performance of the VSA system.

³¹ LO3 = 800 MHz. *Phase Noise* plot of measured LO3 performance shown without spurs.

PXIe-5653 Frequency Lock Time³²

Table 54. PXIe-5653 Maximum Lock Time (0 °C to 55 °C)

| Frequency Step Size | Fast Tuning Mode ³³ (ms) | Normal Tuning Mode ³⁴ (ms) |
|---------------------|-------------------------------------|---------------------------------------|
| ≤25 MHz | 0.85 | 3 |
| ≤50 MHz | 1.10 | 6 |
| ≤75 MHz | 1.35 | 7 |
| ≤80 MHz | 1.35 | 7 |
| ≤90 MHz | 1.35 | 7 |
| ≤100 MHz | 1.35 | 7 |
| ≤250 MHz | 1.80 | 10 |
| ≤500 MHz | 6 | 12 |
| ≤1.0 GHz | 10 | 14 |
| ≤2.0 GHz | 13 | 17 |
| ≤3.0 GHz | 15 | 18 |
| ≤5.1 GHz | 17 | 20 |

PXIe-5653 Frequency Settling Time³⁵

³² PXIe-5653 Frequency Tuning Time consists of *Lock Time + Settling Time to Required Accuracy*. For example, in Fast Configuration mode, a 50 MHz step requires 1.1 ms (the frequency lock time) + 0.75 (the frequency settling time), or 1.85 ms to lock and settle to 0.1 ppm accuracy.

³³ Fast Tuning Mode refers to setting the **LO YIG Main Coil Drive** property to Fast at an accuracy of 1.0×10^{-6} of the final frequency.

³⁴ Normal Tuning Mode refers to setting the **LO YIG Main Coil Drive** property to Normal at an accuracy of 1.0×10^{-6} of the final frequency.

³⁵ PXIe-5653 Frequency Tuning Time consists of *Lock Time + Settling Time to Required Accuracy*. For example, in Fast Configuration mode, a 50 MHz step requires 1.1 ms (the frequency lock time) + 0.75 (the frequency settling time), or 1.85 ms to lock and settle to 0.1 ppm accuracy.

Table 55. PXIe-5668 Maximum Settling Time (0 °C to 55 °C)

| Settling Accuracy (Relative to Final Frequency) | Fast Tuning Mode ³⁶ (ms) | Normal Tuning Mode ³⁷ (ms) |
|--|--|--|
| 1.0×10^{-6} | 0.00 | 0.00 |
| 0.1×10^{-6} | 0.75 | 1.00 |
| 0.01×10^{-6} | 1.60 | 6.00 |
| 0.001×10^{-6} | 5 | 20 |

PXIe-5606 Downconverter Specifications

Instantaneous Bandwidth

IF passband bandwidth

| | |
|-----------------------------------|----------------------------------|
| IF through path (≥ 100 MHz) | 3 dB (23 °C \pm 5 °C, typical) |
| ≥ 5 MHz | 3 dB (23 °C \pm 5 °C, typical) |
| ≥ 300 kHz | 3 dB (23 °C \pm 5 °C, typical) |

RF preselector³⁸ passband bandwidth

| | |
|--------------------------------------|----------------------------------|
| Preselector enabled (≤ 65 MHz) | 6 dB (23 °C \pm 5 °C, typical) |
|--------------------------------------|----------------------------------|

IF Frequencies

Table 56. Nominal PXIe-5668 Downconverter IF Frequencies

| RF Center Frequency | IF Signal Path | IF1 | IF2 | IF3 |
|------------------------|---|------------|-----------|-----------|
| 20 Hz to 3.6 GHz | 80 MHz ³⁹ /100 MHz ⁴⁰ | 4.6125 GHz | 612.5 MHz | 187.5 MHz |
| | 5 MHz | 4.6100 GHz | 610.0 MHz | 190.0 MHz |
| | 300 kHz | 4.6010 GHz | 601.0 MHz | 199.0 MHz |
| | 200 MHz and 320 MHz (device option) | 4.730 GHz | 730 MHz | — |

³⁶ Fast Tuning Mode refers to setting the **LO YIG Main Coil Drive** property to Fast at an accuracy of 1.0×10^{-6} of the final frequency.

³⁷ Normal Tuning Mode refers to setting the **LO YIG Main Coil Drive** property to Normal at an accuracy of 1.0×10^{-6} of the final frequency.

³⁸ Preselector ripple may affect the bandwidth due to passband ripple and modes.

³⁹ 80 MHz BW option

⁴⁰ 200 MHz or 320 MHz BW option

Table 56. Nominal PXIe-5668 Downconverter IF Frequencies (Continued)

| RF Center Frequency | IF Signal Path | IF1 | IF2 | IF3 |
|---------------------|---|-----------|-----------|-----|
| >3.6 GHz | 80 MHz ³⁹ /100 MHz ⁴⁰ | 612.5 MHz | 187.5 MHz | — |
| | 5 MHz | 610.0 MHz | 190.0 MHz | — |
| | 300 kHz | 601.0 MHz | 199.0 MHz | — |
| | 200 MHz and 320 MHz (device option) | 730 MHz | — | — |
| | 400 MHz and 765 MHz (device option and image selection) | 507.5 MHz | — | — |

Amplitude Range

The PXIe-5606 amplitude range is the same as the amplitude range specified for the PXIe-5668.

Display Average Noise Level


Preamplifier Disabled

Table 57. PXIe-5606 Downconverter Display Average Noise Level, Preamplifier Disabled (Typical)

| Center Frequency | 23 °C ± 5 °C (dBm/Hz) | 0 °C to 55 °C (dBm/Hz) |
|---------------------|-----------------------|------------------------|
| 20 Hz to 200 kHz | — | -92 |
| >200 kHz to 10 MHz | -153 | -152 |
| >10 MHz to 100 MHz | -155 | -155 |
| >100 MHz to 300 MHz | -157 | -157 |
| >300 MHz to 1.7 GHz | -157 | -156 |
| >1.7 GHz to 2.8 GHz | -154 | -153 |
| >2.8 GHz to 3.6 GHz | -151 | -150 |
| >3.6 GHz to 5 GHz | -158 | -157 |
| >5 GHz to 14 GHz | -156 | -156 |
| >14 GHz to 17 GHz | -150 | -148 |
| >17 GHz to 24 GHz | -154 | -152 |

Table 57. PXIe-5606 Downconverter Display Average Noise Level, Preamplifier Disabled (Typical) (Continued)


| Center Frequency | 23 °C ± 5 °C (dBm/Hz) | 0 °C to 55 °C (dBm/Hz) |
|---------------------|-----------------------|------------------------|
| >24 GHz to 26.5 GHz | -150 | -149 |

 **Note** Values based on input terminated, no input signal, 0 dB RF attenuation for center frequency ≥ 10 MHz, 100 MHz IF filter for center frequency ≥ 100 MHz, 300 kHz IF filter for center frequency < 100 MHz, ≤ -50 dBm reference level, and > 10 averages. Log average noise level normalized to a 1 Hz noise bandwidth.

Preamplifier Enabled

Table 58. PXIe-5606 Downconverter Display Average Noise Level, Preamplifier Enabled (Typical)

| Center Frequency | 23 °C ± 5 °C (dBm/Hz) | 0 °C to 55 °C (dBm/Hz) |
|---------------------|-----------------------|------------------------|
| 10 MHz to 30 MHz | -167 | -166 |
| >30 MHz to 100 MHz | -168 | -166 |
| >100 MHz to 300 MHz | -169 | -168 |
| >300 MHz to 1.7 GHz | -168 | -167 |
| >1.7 GHz to 2.5 GHz | -166 | -165 |
| >2.8 GHz to 3.6 GHz | -165 | -164 |

 **Note** Values based on input terminated, no input signal, 0 dB RF attenuation, 100 MHz IF filter for center frequency ≥ 100 MHz, 300 kHz IF filter for center frequency < 100 MHz, ≤ -50 dBm reference level, IF through path, and > 10 averages. Log average noise level measured in a 1 Hz noise bandwidth using NI-RFSA I/Q acquisition mode.


Preselector (YIG-Tuned Filter) Present and Enabled

Table 59. PXIe-5606 Downconverter Display Average Noise Level, Preselector (YIG-Tuned Filter) Present and Enabled (Typical)

| Center Frequency | 23 °C ± 5 °C (dBm/Hz) | 0 °C to 55 °C (dBm/Hz) |
|-------------------|-----------------------|------------------------|
| >3.6 GHz to 5 GHz | -152 | -152 |
| >5 GHz to 14 GHz | -154 | -153 |
| >14 GHz to 17 GHz | -147 | -147 |
| >17 GHz to 22 GHz | -150 | -149 |

Table 59. PXIe-5606 Downconverter Display Average Noise Level, Preselector (YIG-Tuned Filter) Present and Enabled (Typical) (Continued)

| Center Frequency | 23 °C ± 5 °C (dBm/Hz) | 0 °C to 55 °C (dBm/Hz) |
|---------------------|-----------------------|------------------------|
| >22 GHz to 24 GHz | -148 | -147 |
| >24 GHz to 26.5 GHz | -148 | -147 |

 **Note** Values based on input terminated, 0 dB RF attenuation, ≤-50 dBm reference level, 100 MHz IF filter, and >10 averages. Log average noise level normalized to a 1 Hz noise bandwidth.


Downconverter Gain Accuracy

(Typical)

The PXIe-5606 gain accuracy after use of the internal self-calibration factor is the same as the amplitude accuracy specification. The receiver that is used with the PXIe-5606 downconverter should have resolution and temperature stability equal to or better than that of the PXIe-5624 digitizer.

Downconverter Conversion Gain

Figure 18. PXIe-5606 Conversion Gain at 100 MHz BW

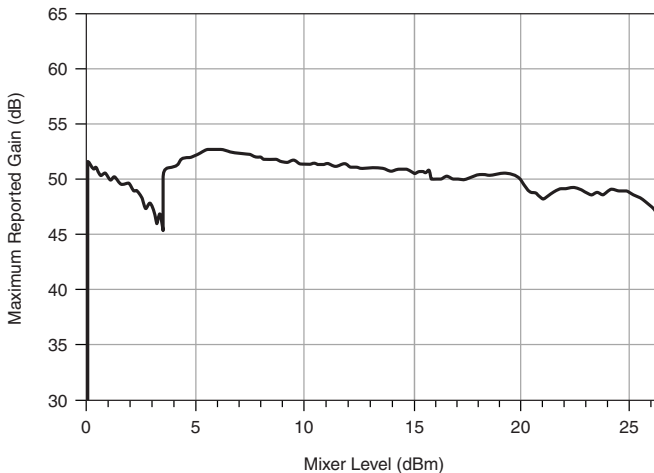

Spurious Response Level

The PXIe-5606 spurious response level is the same as or better than the PXIe-5668 spurious responses specification when the PXIe-5653 is used as the LO and the PXIe-5624 is used as the digitizer.

Image and IF Rejection

The PXIe-5606 image and IF rejection are the same as those specified for the PXIe-5668.

Linearity and Dynamic Range Specifications

The PXIe-5606 linearity (TOI, SHI, two tone compression) and dynamic range specifications are the same as or better than the PXIe-5668 linearity and dynamic range specifications.

Measurement Configuration Speed

The PXIe-5606 measurement configuration speed specification is the same as or better than the PXIe-5668 measurement speed specification when the PXIe-5653 is used as the LO.

PXIe-5624 IF Digitizer Module Specifications

IF IN

| | |
|------------------------------|---------------------------------------|
| Connector | SMA female |
| Input impedance | 50 Ω , nominal |
| Coupling | AC |
| Absolute maximum input power | 20 dBm, continuous wave (CW) RMS |
| Input return loss/VSWR | >15 dB/1.43:1 ⁴¹ , typical |

PFI 0 (Programmable Function Interface)

| | |
|-------------------------------|-----------------------------|
| Connector | SMA female |
| Voltage levels | |
| Absolute maximum input range | -0.5 V to 5.5 V |
| V _{IL} | 0.8 V |
| V _{IH} | 2.0 V |
| V _{OL} | 0.2 V with 100 μ A load |
| V _{OH} | 2.9 V with 100 μ A load |
| Recommended operating voltage | 0 V to 3.3 V |
| Input impedance | 10 k Ω , nominal |
| Output impedance | 50 Ω , nominal |

⁴¹ 5 MHz to 2 GHz.

| | |
|---|-------------------------------------|
| Maximum DC drive strength | 24 mA |
| Minimum required direction change latency | 60 ns + 1 clock cycle ⁴² |

CLK IN

| | |
|-------------------------------------|--------------------------------|
| Connector | SMA female |
| Frequency | |
| Sample Clock | 4 GHz, 2 GHz |
| Reference Clock | 100 MHz, 10 MHz |
| Tolerance | ±50 ppm |
| Amplitude | |
| 10 MHz and 100 MHz Reference Clocks | -3 dBm to 15 dBm ⁴³ |
| 2 GHz and 4 GHz Sample Clocks | -5 dBm to 10 dBm |
| Input impedance | 50 Ω, nominal |
| Coupling | AC |

CLK OUT

| | |
|-------------------------------|--|
| Connector | SMA female |
| Frequency | |
| Sample Clock | 2 GHz |
| Reference Clock | 100 MHz, 10 MHz ⁴⁴ |
| Tolerance | Same as Reference Clock or Sample Clock source ⁴⁵ |
| Amplitude, typical | |
| Reference Clock (CLK IN) | CLK IN input power + 3 dB, nominal |
| Reference Clock (PXIe_CLK100) | 7.5 dBm |
| Sample Clock | 5 dBm |
| Output impedance | 50 Ω, nominal |
| Coupling | AC |

⁴² *Clock cycle* refers to the FPGA clock domain used for direction control.

⁴³ Optimal performance for a 10 MHz Reference Clock is greater than 4 dBm.

⁴⁴ 100 MHz available when locking to CLK IN or PXIe_CLK100. 10 MHz available when locking to external front panel CLK IN.

⁴⁵ Refer to the [Internal Frequency Reference](#) section for more information about internal frequency reference accuracy specifications.

Environment

| | |
|------------------|---|
| Maximum altitude | 2,000 m (800 mbar) (at 25 °C ambient temperature) |
|------------------|---|

| | |
|------------------|---|
| Pollution Degree | 2 |
|------------------|---|

Indoor use only.

Operating Environment

| | |
|---------------------------|---------------|
| Ambient temperature range | 0 °C to 55 °C |
|---------------------------|---------------|

| | |
|-------------------------|---------------------------|
| Relative humidity range | 10% to 90%, noncondensing |
|-------------------------|---------------------------|

Storage Environment

| | |
|---------------------------|-----------------|
| Ambient temperature range | -41 °C to 71 °C |
|---------------------------|-----------------|

| | |
|-------------------------|--------------------------|
| Relative humidity range | 5% to 95%, noncondensing |
|-------------------------|--------------------------|

Shock and Vibration

| | |
|-----------------|---|
| Operating shock | 30 g peak, half-sine, 11 ms pulse ⁴⁶ |
|-----------------|---|

Random vibration

| | |
|-----------|--------------------------------------|
| Operating | 5 Hz to 500 Hz, 0.3 g _{rms} |
|-----------|--------------------------------------|

| | |
|--------------|--------------------------------------|
| Nonoperating | 5 Hz to 500 Hz, 2.4 g _{rms} |
|--------------|--------------------------------------|

Physical Characteristics

Table 60. PXIe-5668 Module Characteristics

| Module | Dimensions | Weight | |
|-----------------------------------|-------------|---------|--------|
| | | Grams | Ounces |
| PXIe-5606 RF Signal Downconverter | 3U, 4 slots | 1,880.0 | 63.3 |
| PXIe-5624 IF Digitizer | 3U, 1 slot | 490.0 | 17.3 |

⁴⁶ Internal mechanical attenuator may change states during shock application. Use instrument preset or reset attenuator to return to normal operating state.

Table 60. PXIe-5668 Module Characteristics (Continued)

| Module | Dimensions | Weight | |
|--------------------------------------|-------------|---------|--------|
| | | Grams | Ounces |
| PXIe-5653 RF Analog Signal Generator | 3U, 2 slots | 1,270.0 | 44.8 |
| PXIe-5668 Vector Signal Analyzer | 3U, 7 slots | 3,640.0 | 128.4 |



Notice Clean the hardware with a soft, nonmetallic brush. Make sure that the hardware is completely dry and free from contaminants before returning it to service.

Compliance and Certifications

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Commitment to the Environment* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



NI 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 NI 中国 RoHS 合规性信息, 请登录 ni.com/environment/rohs_china。
(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help>Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.