



1		2			3		4				
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
▲	1	DIS-C-000585	T.K	E.K	07.07.27	▲					. .
▲						▲					. .
▲						▲					. .

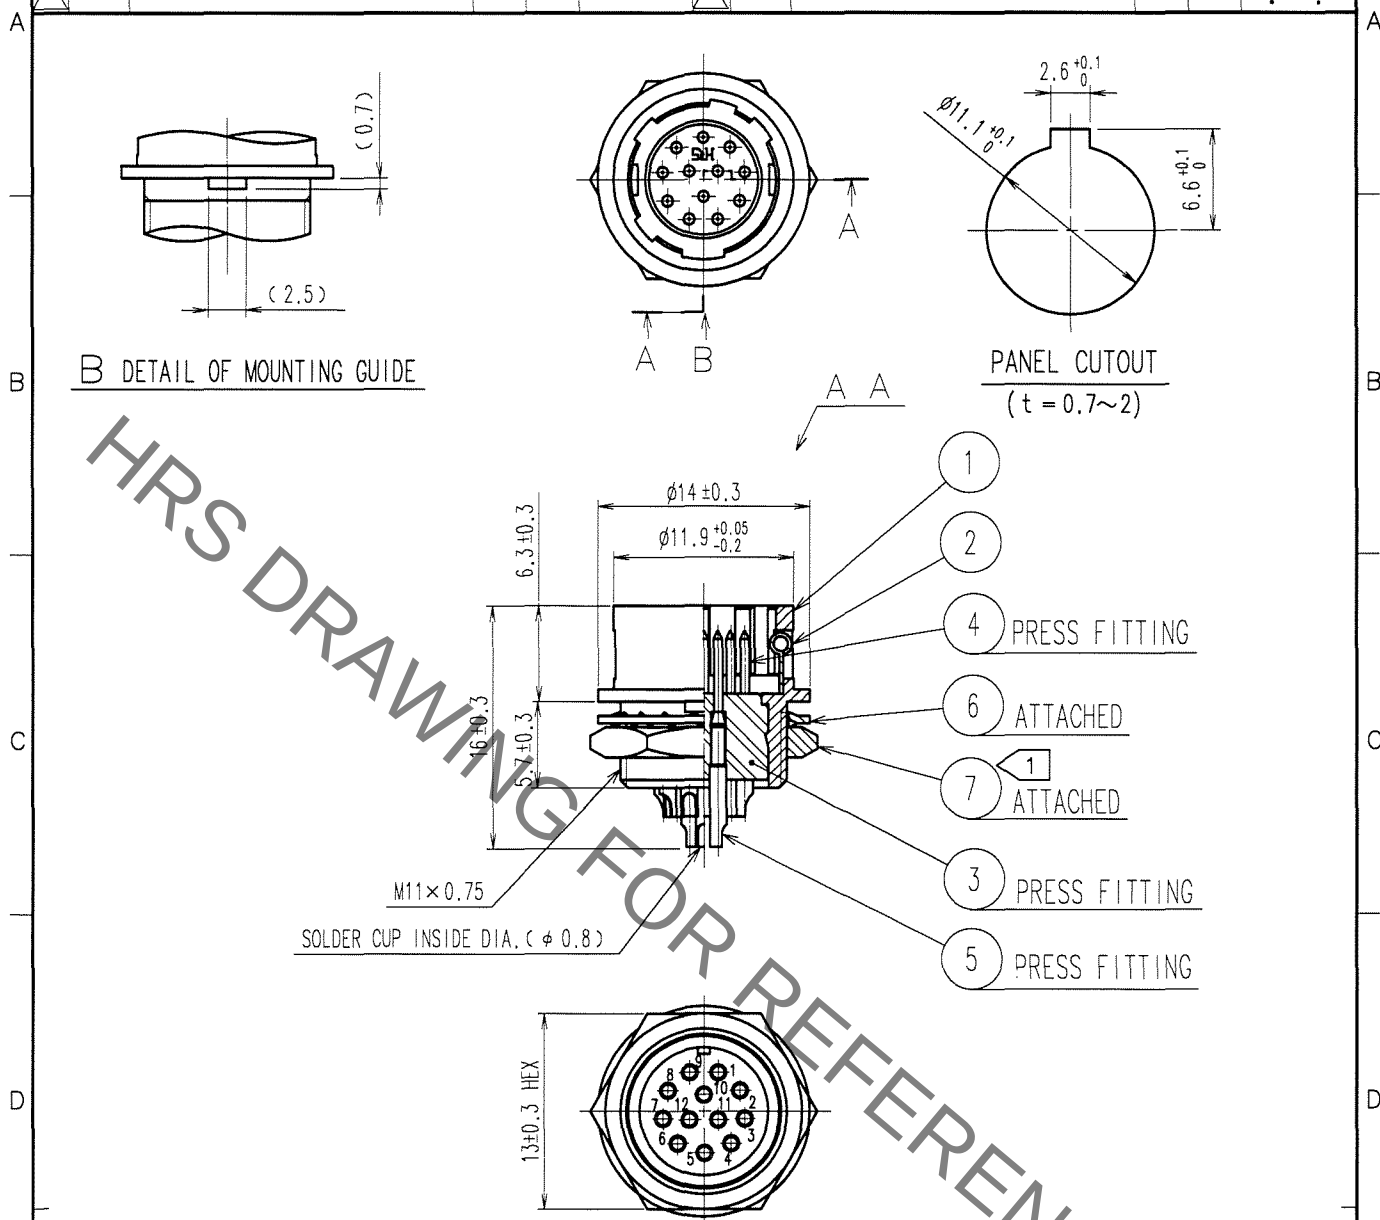

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE $2 \text{ N} \cdot \text{m}$.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑦ FROM LOOSENING.

			7	BRASS ①	NICKEL PLATING
3	POLYAMIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	STAINLESS STEEL		5	BRASS	SILVER PLATING 2μ m min.
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		D.MATSUNE	D.MATSUNE	E.KUNII	M.SATO	
		'05 10 01	'05 10 01	'05 10 03	'05 10 14	

	DRAWING NO.	PART NO.
	EDC4-020553-73	HR10A-10R-12P(73)
	CODE NO.	CL110-0404-5-73
SCALE 2 : 1		
UNITS mm		

HRS

HIROSE ELECTRIC CO., LTD.