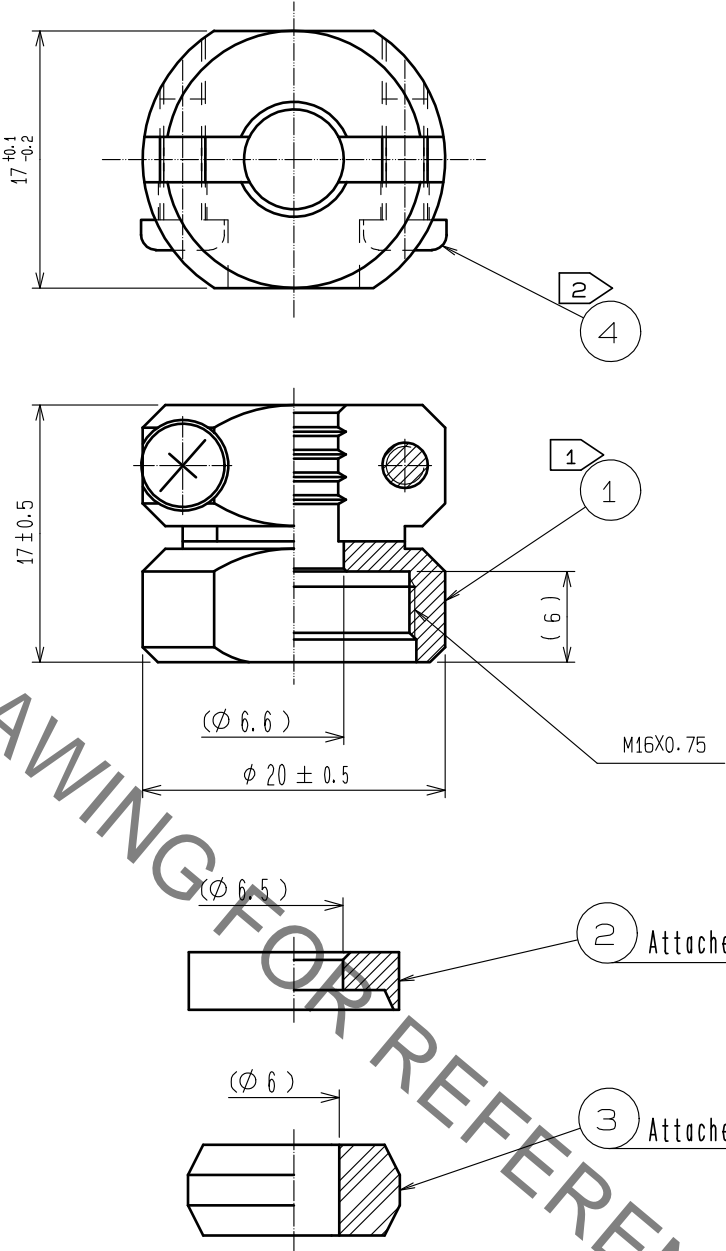



1		2		3		4	
A		B		C		D	
							
Notes		<p>① The recommended clamp torque of REF. No. ① to be 2 to 2.5 N·m. LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent REF. No. ① from loosening.</p> <p>② The recommended clamp torque of REF. No. ④ to be 0.65 to 0.7 N·m.</p> <p>③ Sealing and airtightness and oil resisting shall be tested under mated condition with an applicable connector.</p>					
2		BRASS		NICKEL PLATING		4	
1		BRASS		CHROME PLATING		3	
NO.		MATERIAL		FINISH . REMARKS		NO.	
UNITS mm				SCALE 2 : 1		COUNT	
DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
APPROVED : HY. KOBAYASHI 15.08.04		DRAWING NO. EDC-110596-72-00					
CHECKED : HY. KOBAYASHI 15.08.04		PART NO. JR13WCC-6(72)					
DESIGNED : HY. KISHI 15.08.04		CODE NO. CL114-2047-6-72					
DRAWN : HY. KISHI 15.08.04							
FORM HC0011-5-51		2		3		4	