
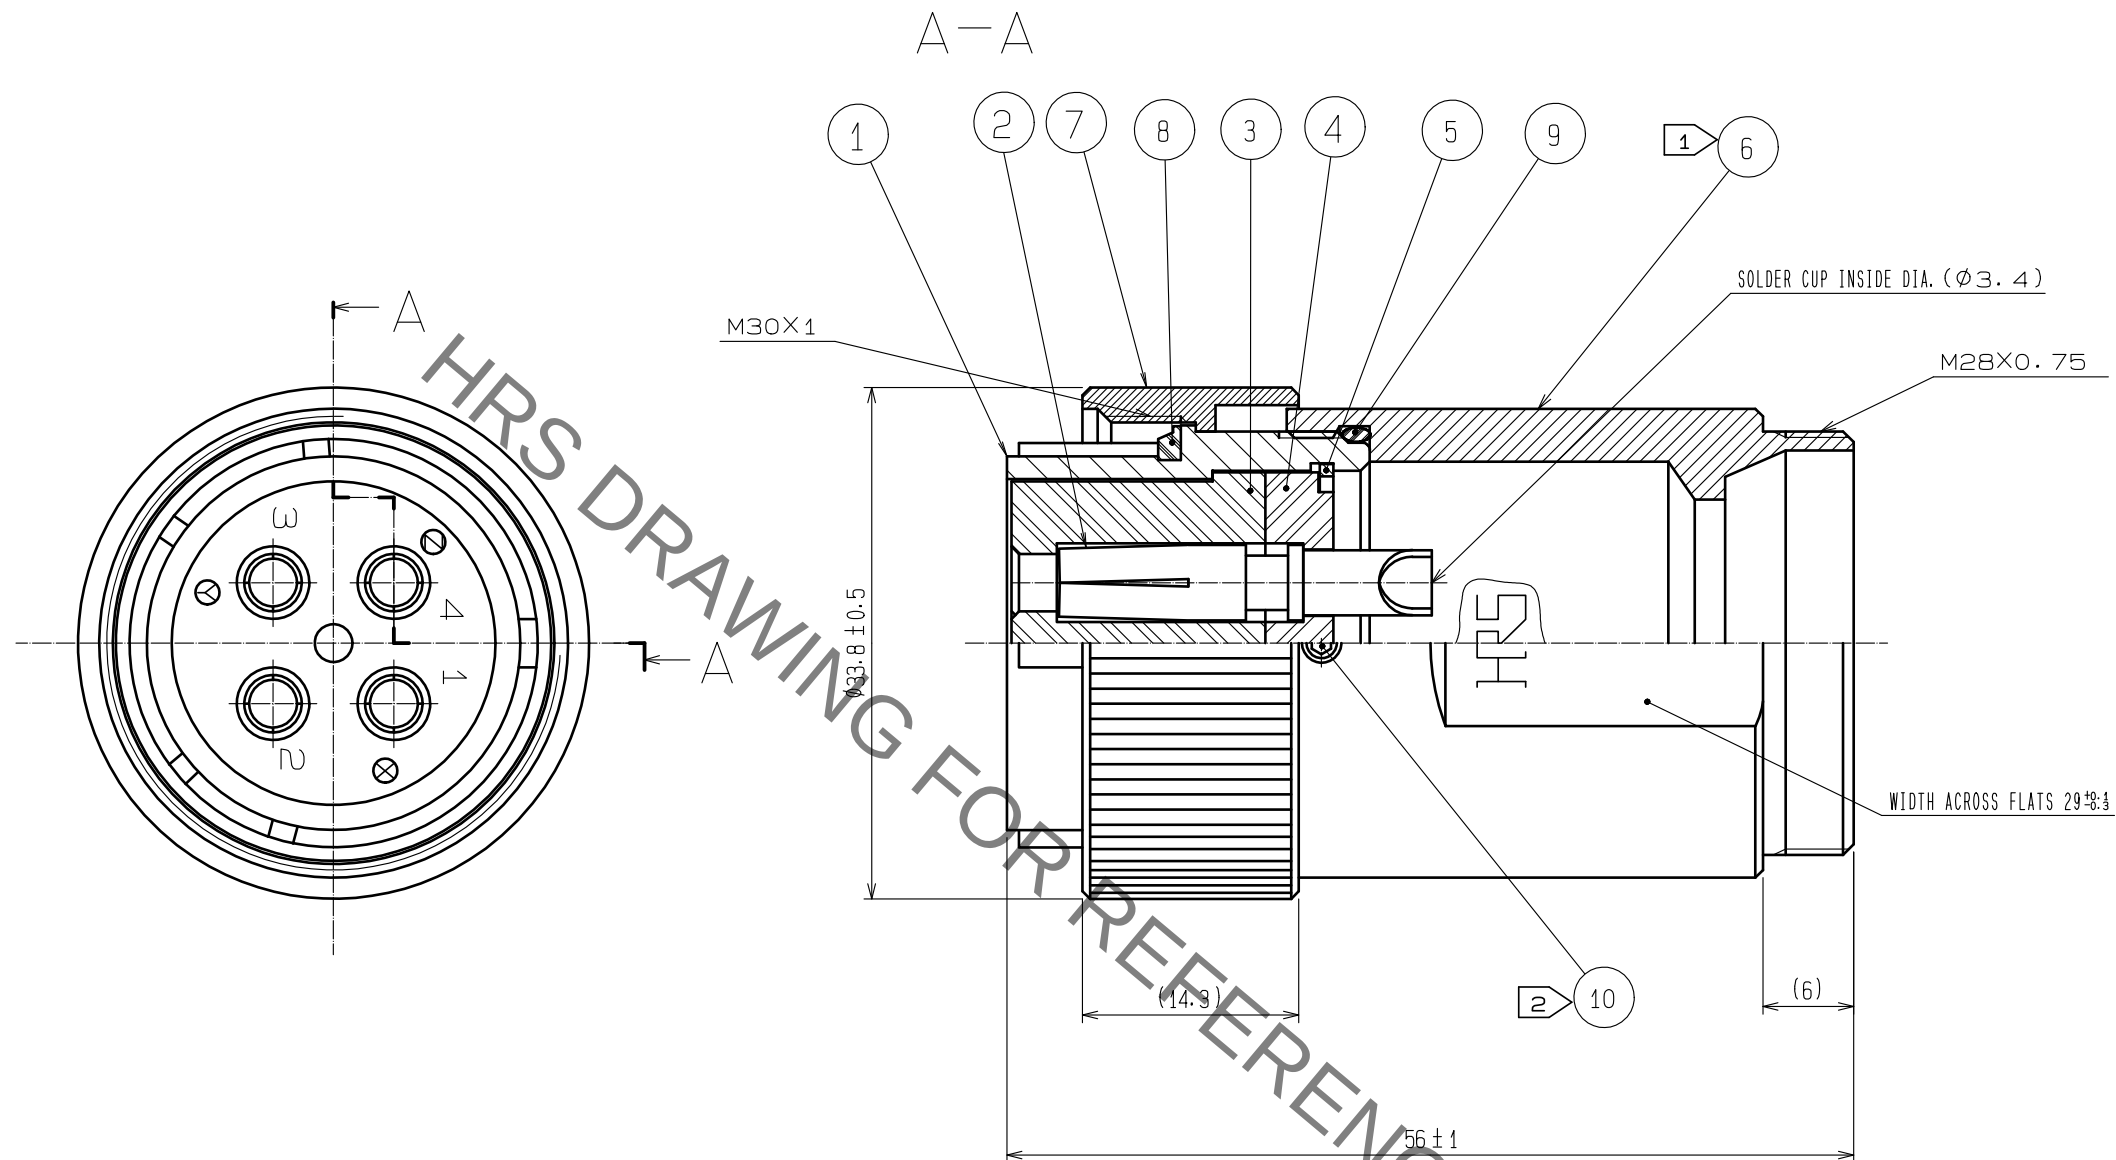


Feb.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑥ SHALL BE 5 TO 5.5N · m.
 - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑩ SHALL BE 0.2 TO 0.25N · m.
 - 3 LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ①, ⑥ AND ⑩ FROM LOOSENING.
 - 4 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑥ TO REF. NO. ① AND THE SOLDER CUP OF REF. NO. ② ARE SHOWN.
 - 5 THIS PRODUCT IS TO BE USED WITH CABLE CLAMP, JR25WCC-*(72).
*DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.
- △ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.
- △ 6 UL certified product(E52653).

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	HEX:1.27 		
4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	9	SILICONE RUBBER	(BLACK)		
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)		
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING		
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00003802	DESIGNED YS. NARA	CHECKED EJ. KUNII	DATE 20200129

 HIROSE ELECTRIC CO., LTD.	APPROVED	• EJ. KUNII	20130130	DRAWING NO.	EDC3-118063-00	
	CHECKED	• HY. KISHI	20130130	PART NO.	JR25WPH-4S	
	DESIGNED	• HK. NAMAI	20130129	CODE NO.	CL114-2183-4-00	
	DRAWN	• HK. NAMAI	20130129			

	
---	---