


Feb.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

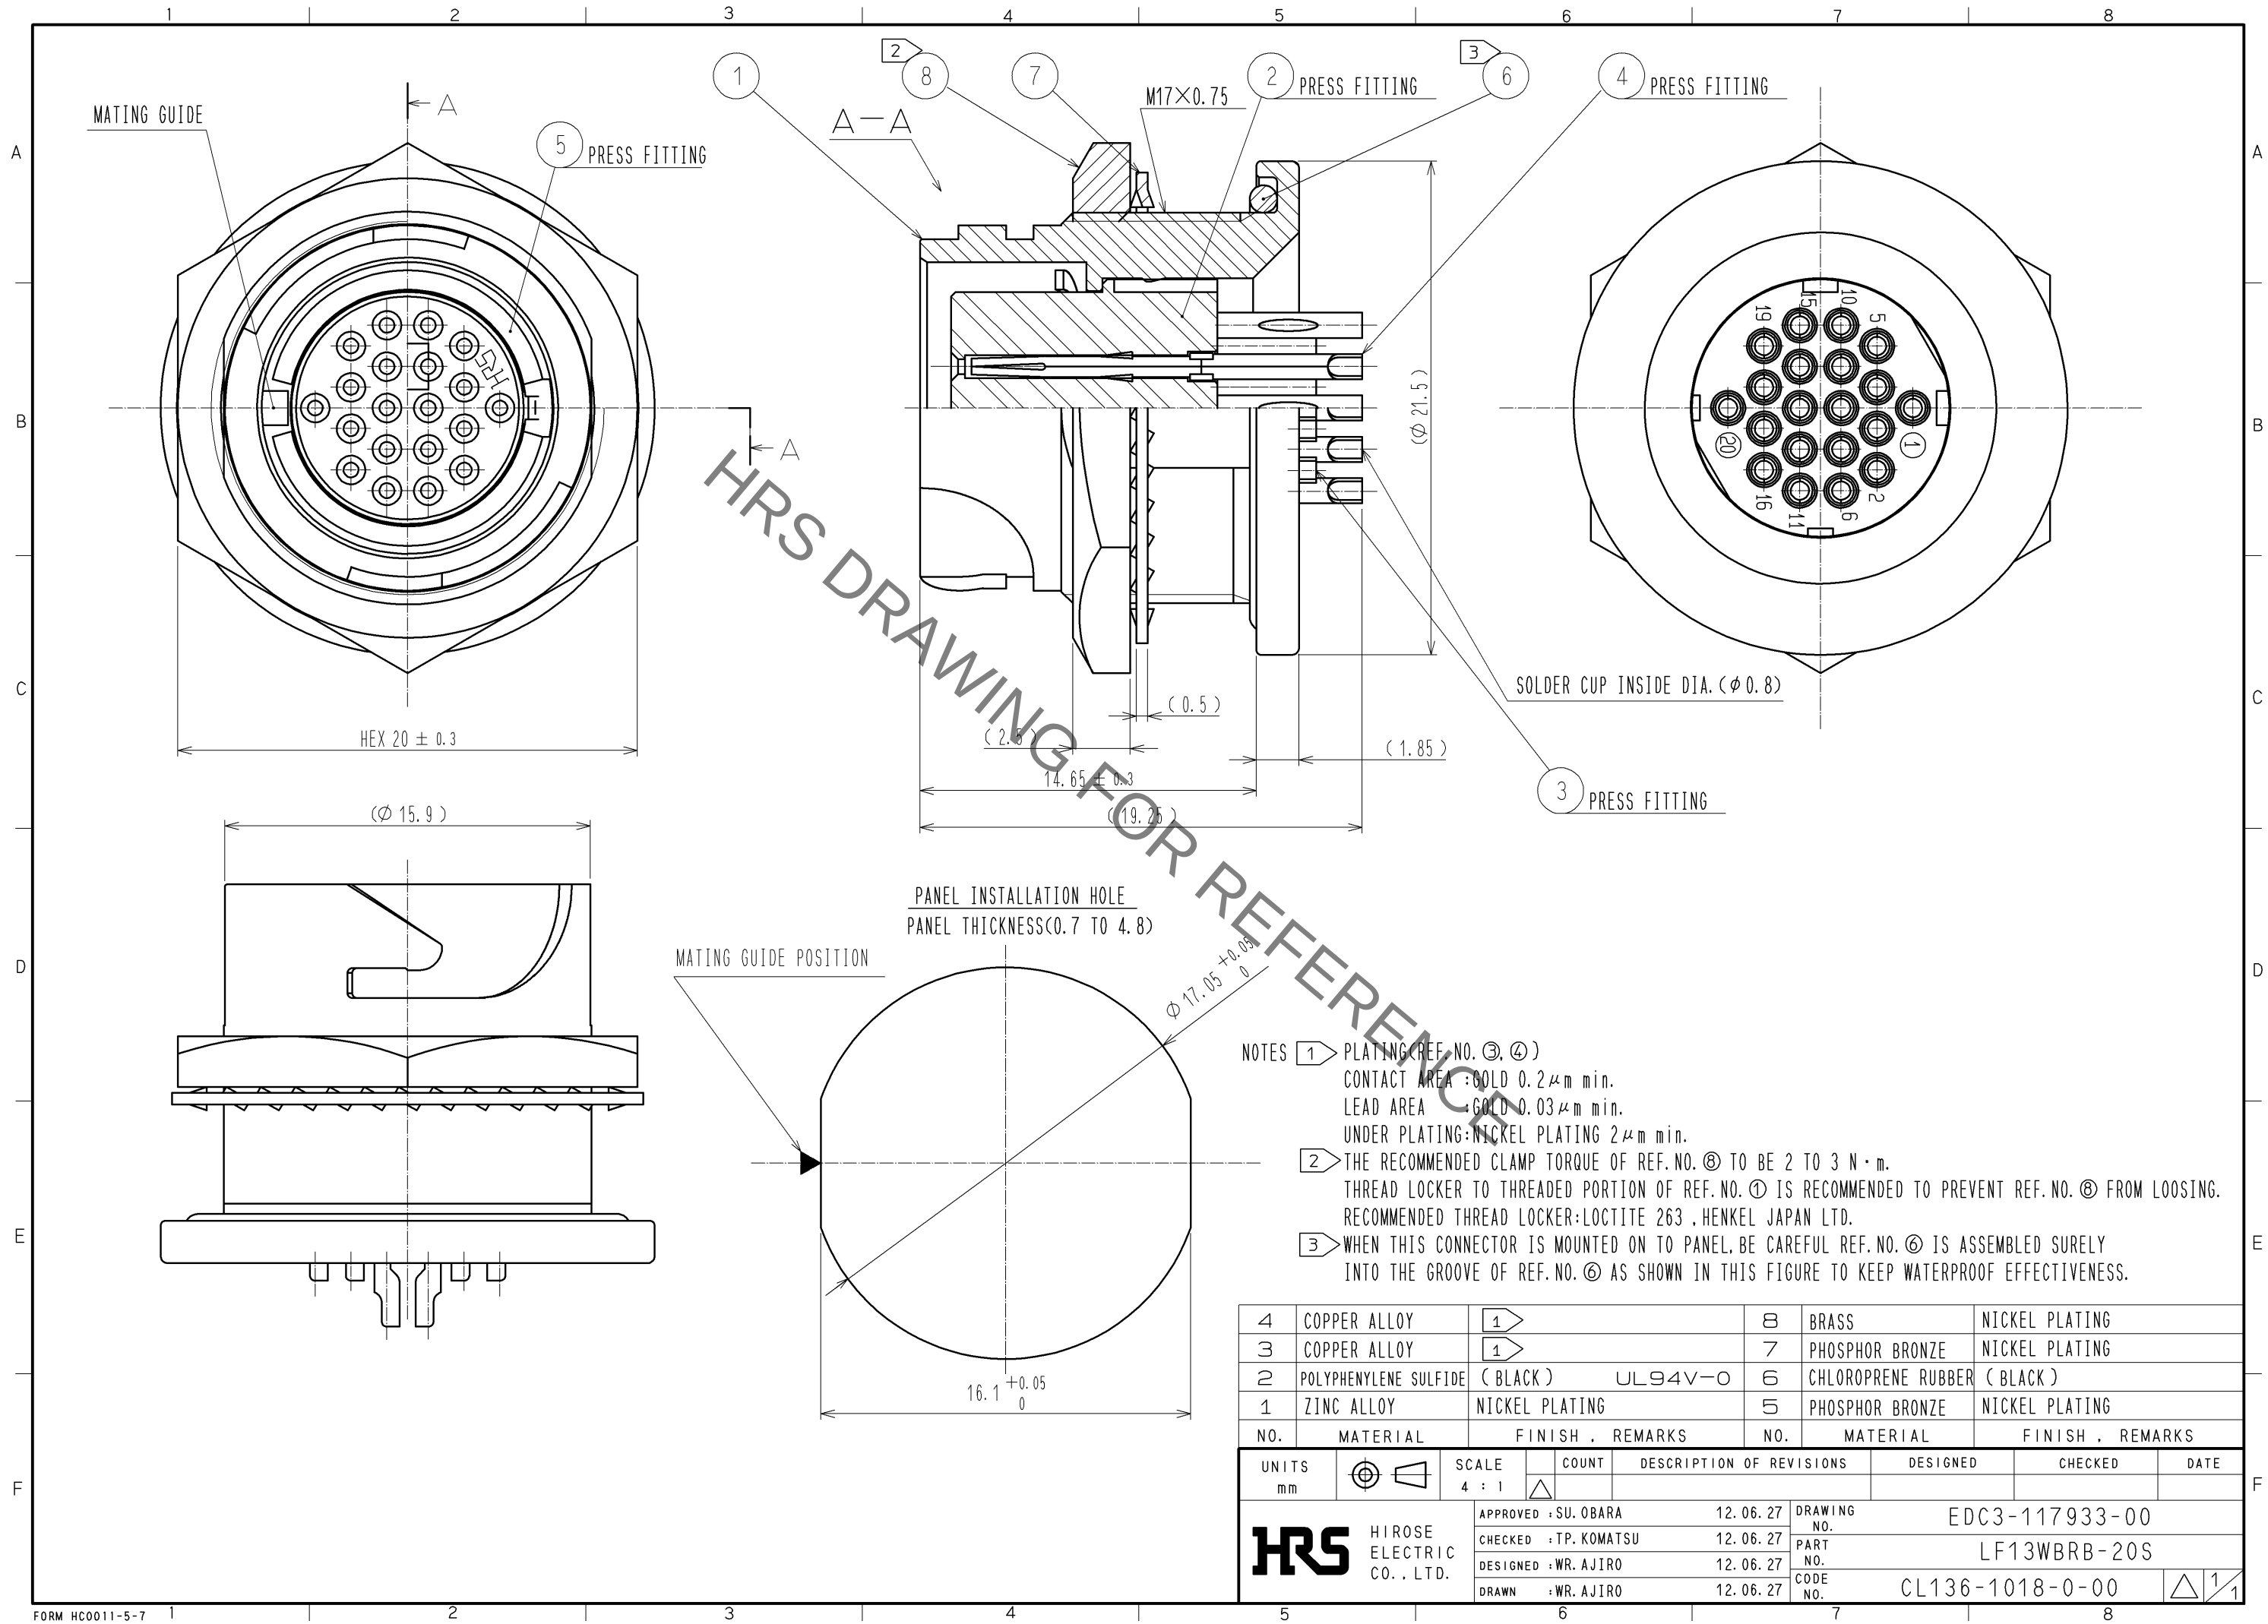

- NOTES ① PLATING (REF. NO. ③, ④)
CONTACT AREA : GOLD 0.2 μ m min.
LEAD AREA : GOLD 0.03 μ m min.
UNDER PLATING: NICKEL PLATING 2 μ m min.
- ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑧ TO BE 2 TO 3 N · m.
THREAD LOCKER TO THREADED PORTION OF REF. NO. ① IS RECOMMENDED TO PREVENT REF. NO. ⑧ FROM LOOSING.
RECOMMENDED THREAD LOCKER: LOCTITE 263 , HENKEL JAPAN LTD.
- ③ WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF. NO. ⑥ IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. ④ AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

4	COPPER ALLOY		8	BRASS	NICKEL PLATING				
3	COPPER ALLOY		7	PHOSPHOR BRONZE	NICKEL PLATING				
2	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0	6	CHLOROPRENE RUBBER (BLACK)					
1	ZINC ALLOY	NICKEL PLATING	5	PHOSPHOR BRONZE	NICKEL PLATING				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA		12. 06. 27	DRAWING NO. EDC3-117933-00				
		CHECKED : TP. KOMATSU		12. 06. 27	PART NO. LF13WBRB-20S				
		DESIGNED : WR. AJIRO		12. 06. 27	CODE NO. CL136-1018-0-00				
		DRAWN : WR. AJIRO		12. 06. 27	1/1				