



Data Sheet | Item Number: 2773-2401
PUSH WIRE® Inline Splicing Connector; for solid and stranded conductors; max. 4 mm²; 2-conductor; transparent housing; Transparent cover; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent
<https://www.wago.com/2773-2401>

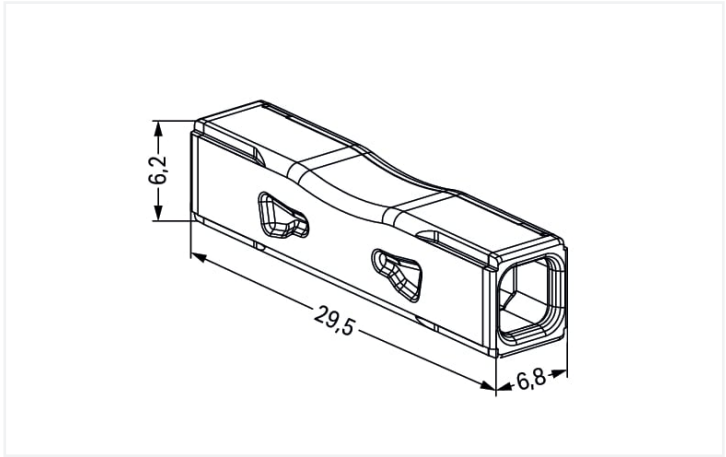

Color: ☐ transparent

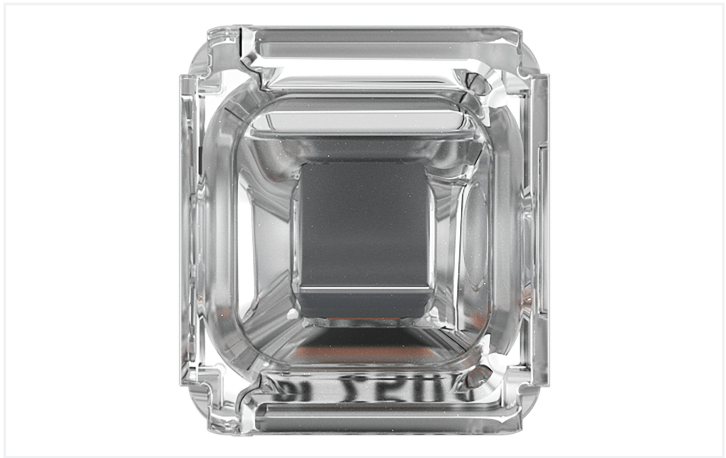

| Electrical data | | | | | | | |
|----------------------|-----|----------|-------|--|---------------|---|---------|
| Ratings per | | EN 60664 | | | Approvals per | | UL 486C |
| Overvoltage category | III | III | II | | Use group | B | C D |
| Pollution degree | 3 | 2 | 2 | | Rated voltage | - | 600 V - |
| Nominal voltage | - | - | 450 V | | Rated current | - | 20 A - |
| Rated surge voltage | - | - | 4 kV | | | | |
| Rated current | - | - | 32 A | | | | |



Connection data

| Connection 1 | |
|--------------------|-------------------------------------|
| Solid conductor | 0.75 ... 4 mm² / 18 ... 12 AWG |
| Stranded conductor | 1.5 ... 4 mm² |
| Conductor diameter | 1.6 ... 2 mm / 18 ... 12 AWG |
| Strip length | 10 ... 11 mm / 0.39 ... 0.43 inches |

Physical data

| | |
|--------|------------------------|
| Width | 6.8 mm / 0.268 inches |
| Height | 6.15 mm / 0.242 inches |
| Depth | 29.5 mm / 1.161 inches |

Material data

| | |
|-------------------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color | transparent |
| Cover color | transparent |
| Material group | IIIa |
| Insulation material | Polycarbonate (PC) |
| Flammability class per UL94 | V2 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper (E _{Cu}) |
| Contact plating | Tin |
| Fire load | 0.038 MJ |
| Weight of insulation material | 0.8 g |
| Weight | 1.4 g |

Environmental requirements

| | |
|----------------------------------|----------------|
| Processing temperature | -35 ... +60 °C |
| Continuous operating temperature | 105 °C |

Commercial data

| | |
|-----------------------|----------------|
| PU (SPU) | 1000 (100) pcs |
| Country of origin | CH |
| GTIN | 4066966321630 |
| Customs tariff number | 85369010000 |

Environmental Product Compliance

| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Downloads

Environmental Product Compliance

| |
|---|
| Compliance Search |
| Environmental Product Compliance 2773-2401 |




| |
|-------------------------------------|
| 1 Compatible Products |
| 1.1 Optional Accessories |
| 1.1.1 General accessories |
| 1.1.1.1 Installation terminal block |



Item No.: 207-5485/316-000
cable repair set; for multicore cables;
Straight-through; with glue; Cable diame-
ter 8 - 24 mm; with enclosed splicing
connectors; medium-walled; black

| |
|-----------------------|
| Installation Notes |
| Conductor termination |



Strip conductor to 10 mm.



Insert the conductor.



Check for the correct conductor position.

| |
|-------------------|
| Conductor removal |
|-------------------|



Twist the connector alternately left and
right while pulling it off the conductor.


| |
|-------------|
| Application |
|-------------|



Wiring conductors in a flush-mounted
junction box.



Extending short wires.



Use with a shrink tube



Use of the inline splicing connector (for
plugging in with a shrink tube) in the cable
repair set 207-5485/316-000.

Application




Damaged cable

Strip the damaged cable approx. 10 cm uniformly around the damaged area.

Cut out the damaged areas in the copper and disconnect all other conductors. For damaged areas between 1 mm and 30 mm, at least 30 mm of the damaged conductor must be removed. Tip: A connector (approx. 30 mm long) can be used as a length guide.

Strip conductor and conductor bridge to 10 mm specified and insert into connector. Only one connector is required for damage points 1 mm.



Strip 10 mm conductor per specification and insert connector (example shows staggered connectors).

Pull the shrink tube over the cable end.

The shrink tube must have an overlap length of at least 30 mm on the cable sheath.

Heat the shrink tube evenly with a hot air blower between 110°C and 200°C.



The shrinking process is only completed when the shrink tube is tightly connected to the cable and the adhesive has visibly melted (see photo).