


Feb.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

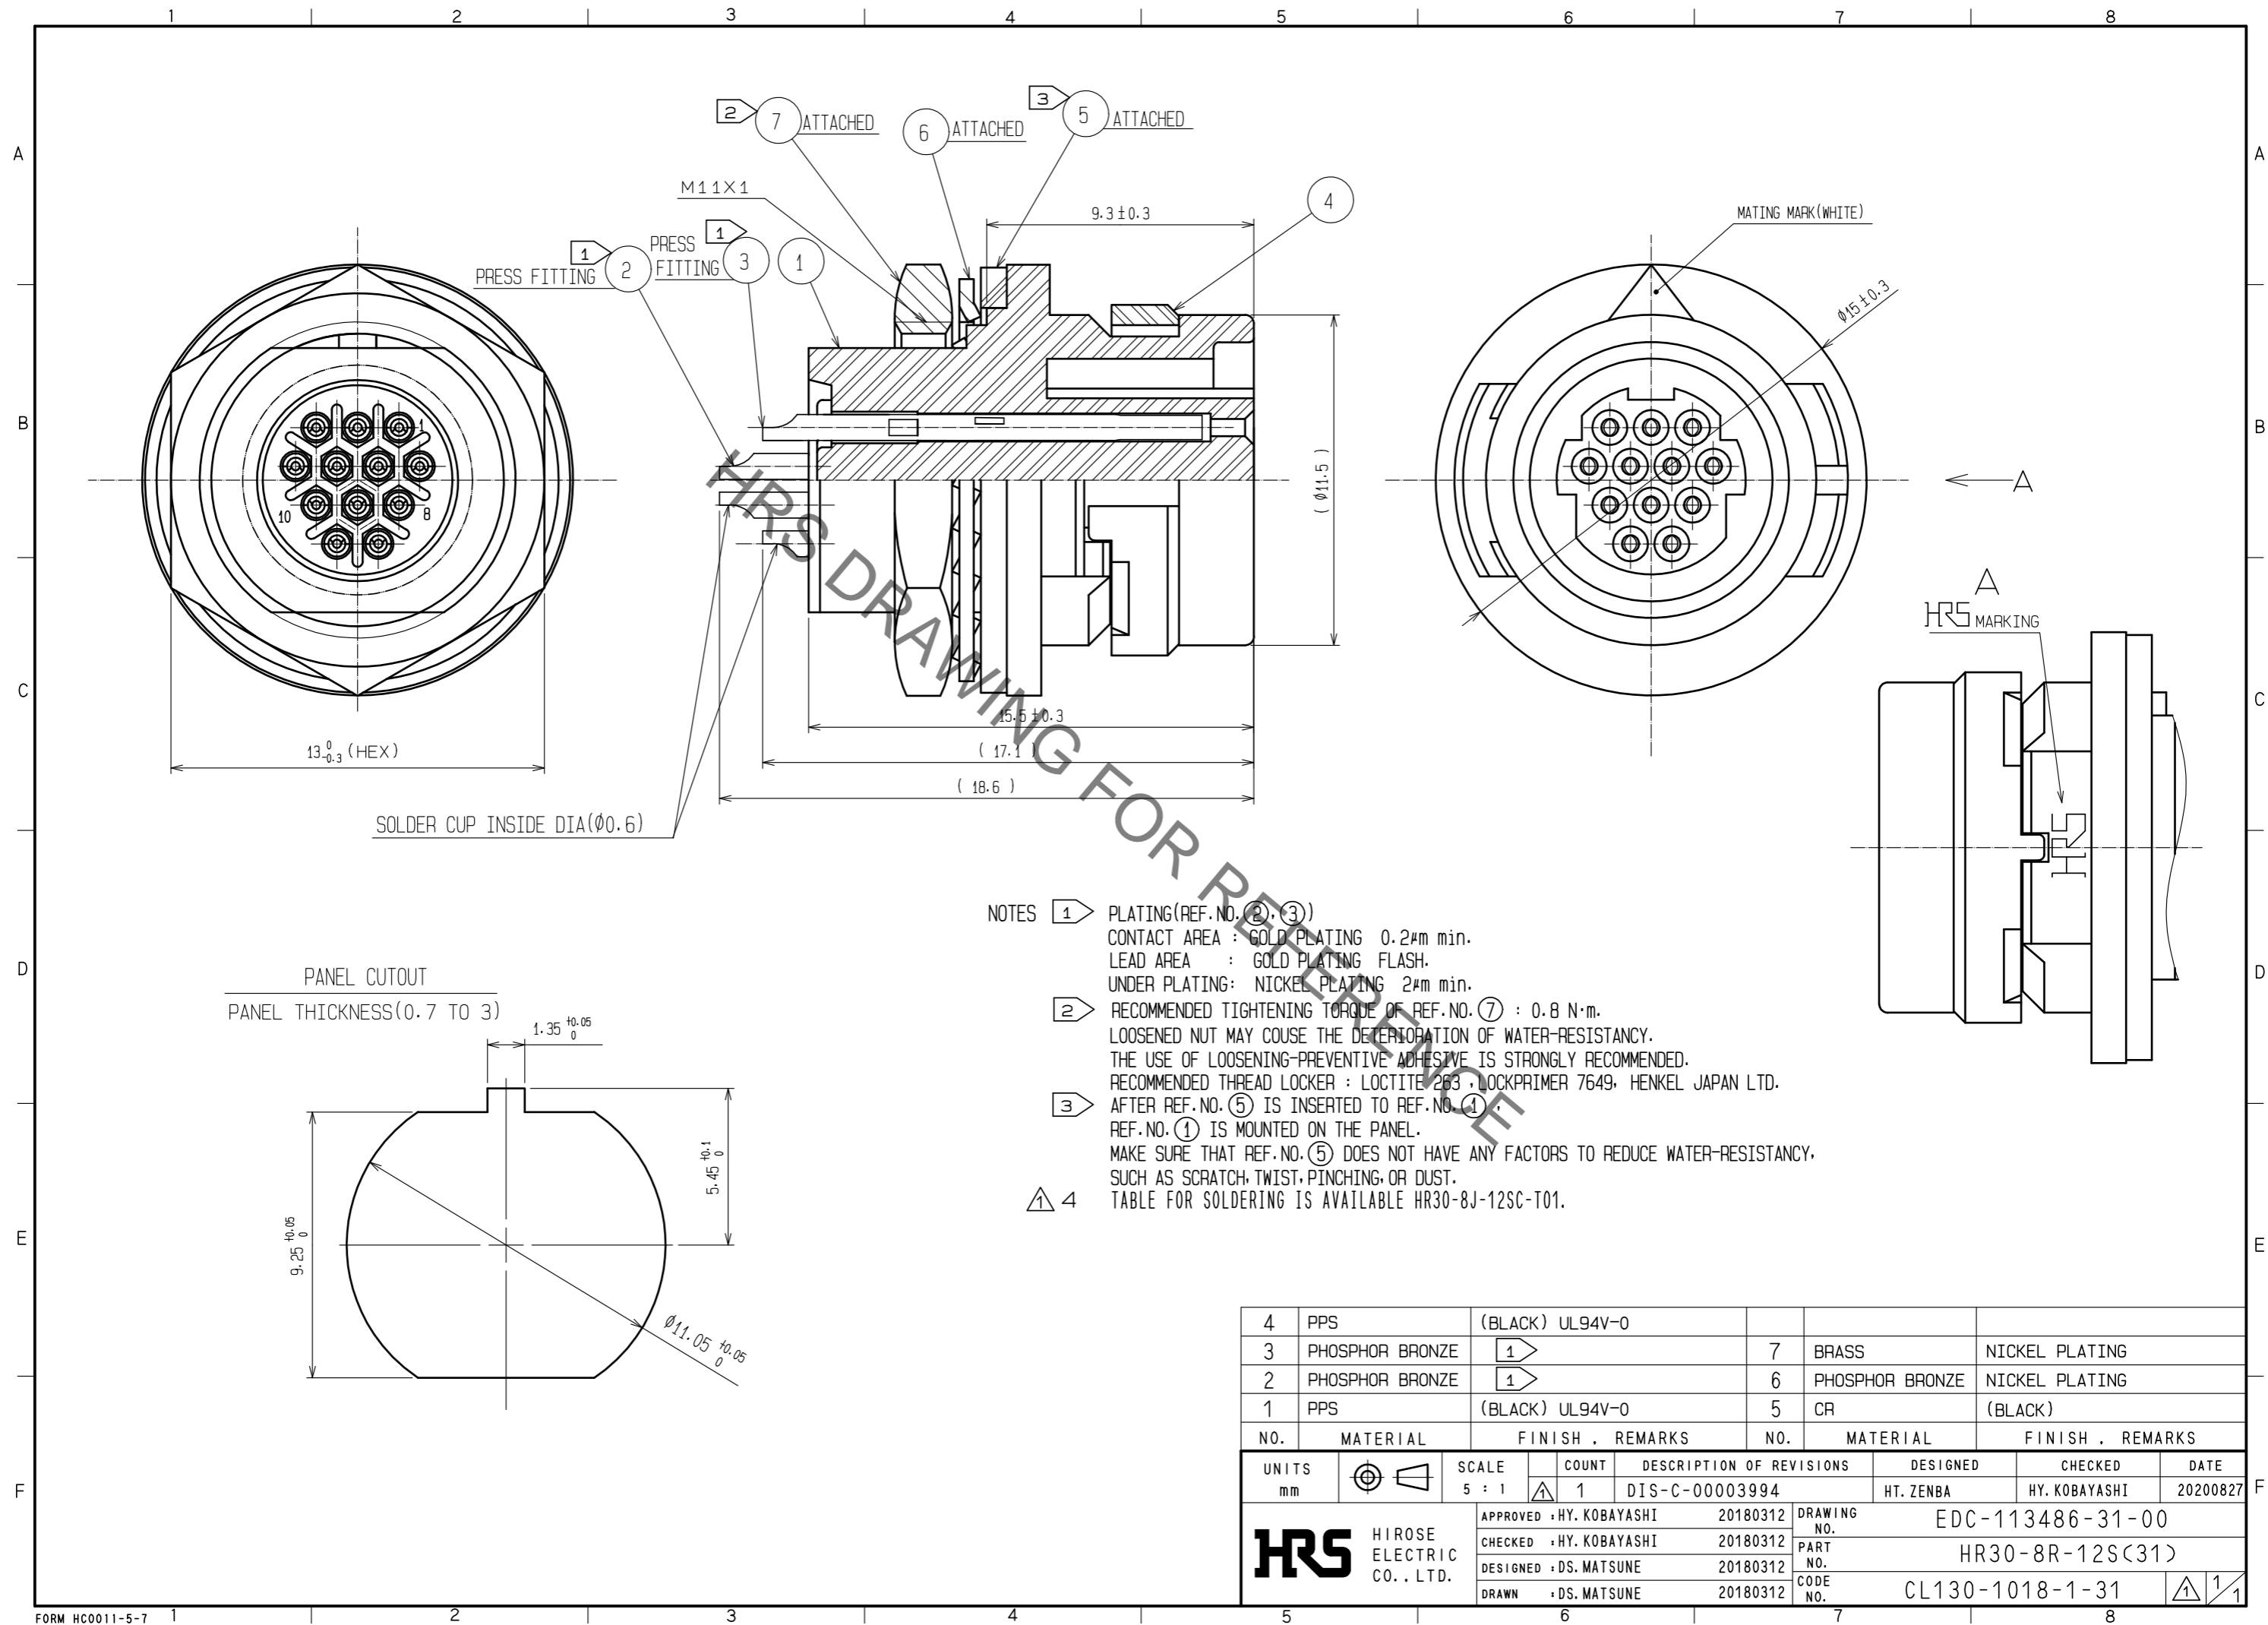

- NOTES
- PLATING(REF.NO. ②, ③)  
CONTACT AREA : GOLD PLATING 0.2μm min.  
LEAD AREA : GOLD PLATING FLASH.  
UNDER PLATING: NICKEL PLATING 2μm min.
  - RECOMMENDED TIGHTENING TORQUE OF REF.NO. ⑦ : 0.8 N·m.  
LOOSENED NUT MAY COUSE THE DETERIORATION OF WATER-RESISTANCY.  
THE USE OF LOOSENING-PREVENTIVE ADHESIVE IS STRONGLY RECOMMENDED.  
RECOMMENDED THREAD LOCKER : LOCTITE 263, LOCKPRIMER 7649, HENKEL JAPAN LTD.
  - AFTER REF.NO. ⑤ IS INSERTED TO REF.NO. ①,  
REF.NO. ① IS MOUNTED ON THE PANEL.  
MAKE SURE THAT REF.NO. ⑤ DOES NOT HAVE ANY FACTORS TO REDUCE WATER-RESISTANCY,  
SUCH AS SCRATCH, TWIST, PINCHING, OR DUST.  
TABLE FOR SOLDERING IS AVAILABLE HR30-8J-12SC-T01.
- ④

4	PPS	(BLACK) UL94V-0			
3	PHOSPHOR BRONZE	①	7	BRASS	NICKEL PLATING
2	PHOSPHOR BRONZE	①	6	PHOSPHOR BRONZE	NICKEL PLATING
1	PPS	(BLACK) UL94V-0	5	CR	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00003994	DESIGNED HT. ZENBA
HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	20180312	DRAWING NO.	EDC-113486-31-00
		CHECKED : HY. KOBAYASHI	20180312	PART NO.	HR30-8R-12SC(31)
		DESIGNED : DS. MATSUNE	20180312	CODE NO.	CL130-1018-1-31
		DRAWN : DS. MATSUNE	20180312		
					DATE 20200827