


1					2			3			4		
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
△						△					. .		
△						△					. .		
△						△					. .		

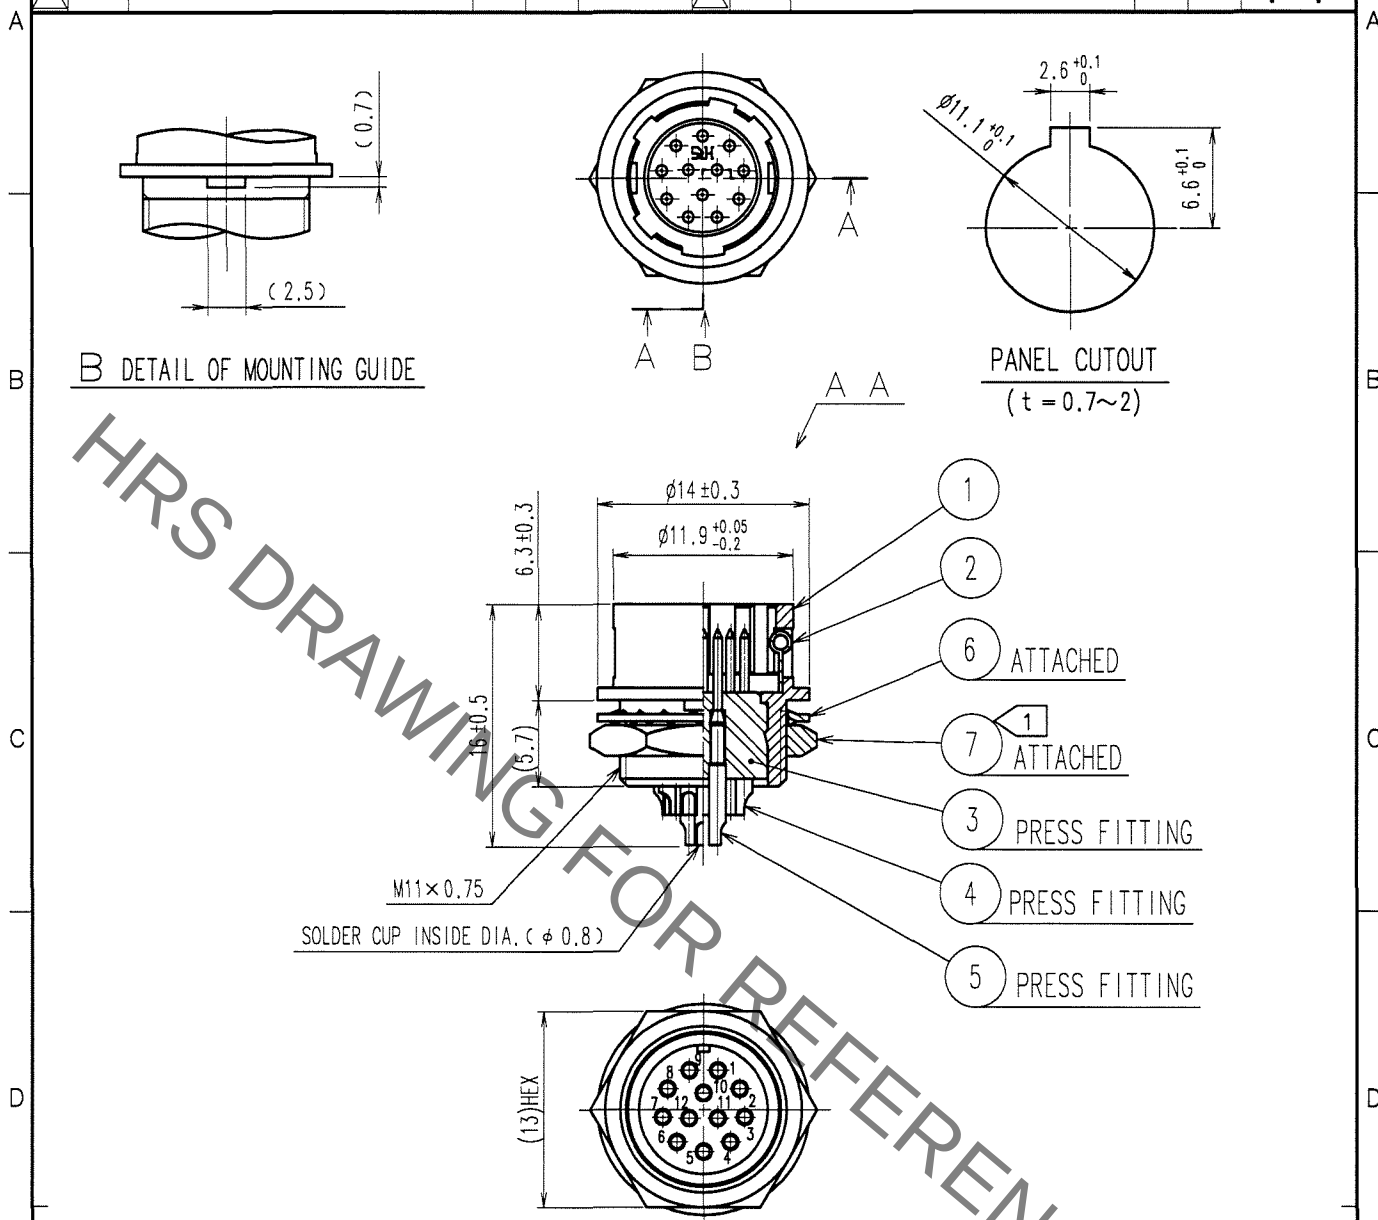

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. 7 TO BE 2 N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. 7 FROM LOOSENING.

3	POLYAMIDE	(BLUE)	7	BRASS	NICKEL PLATING
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	GOLD PLATING 0.2μ m min.
			4	BRASS	NICKEL UNDER PLATING 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN D. Matsume 05.11.19	DESIGNED D. Matsume 05.11.19	CHECKED E. Kunii 05.11.22	APPROVED M. Sato 05.11.24	RELEASED
----------------------	---------------------------------	------------------------------------	---------------------------------	---------------------------------	----------

DRAWING NO. EDC4-007771-73	PART NO. HR10-10R-12P(73)
CODE NO. CL110-0036-3-73	1/1