
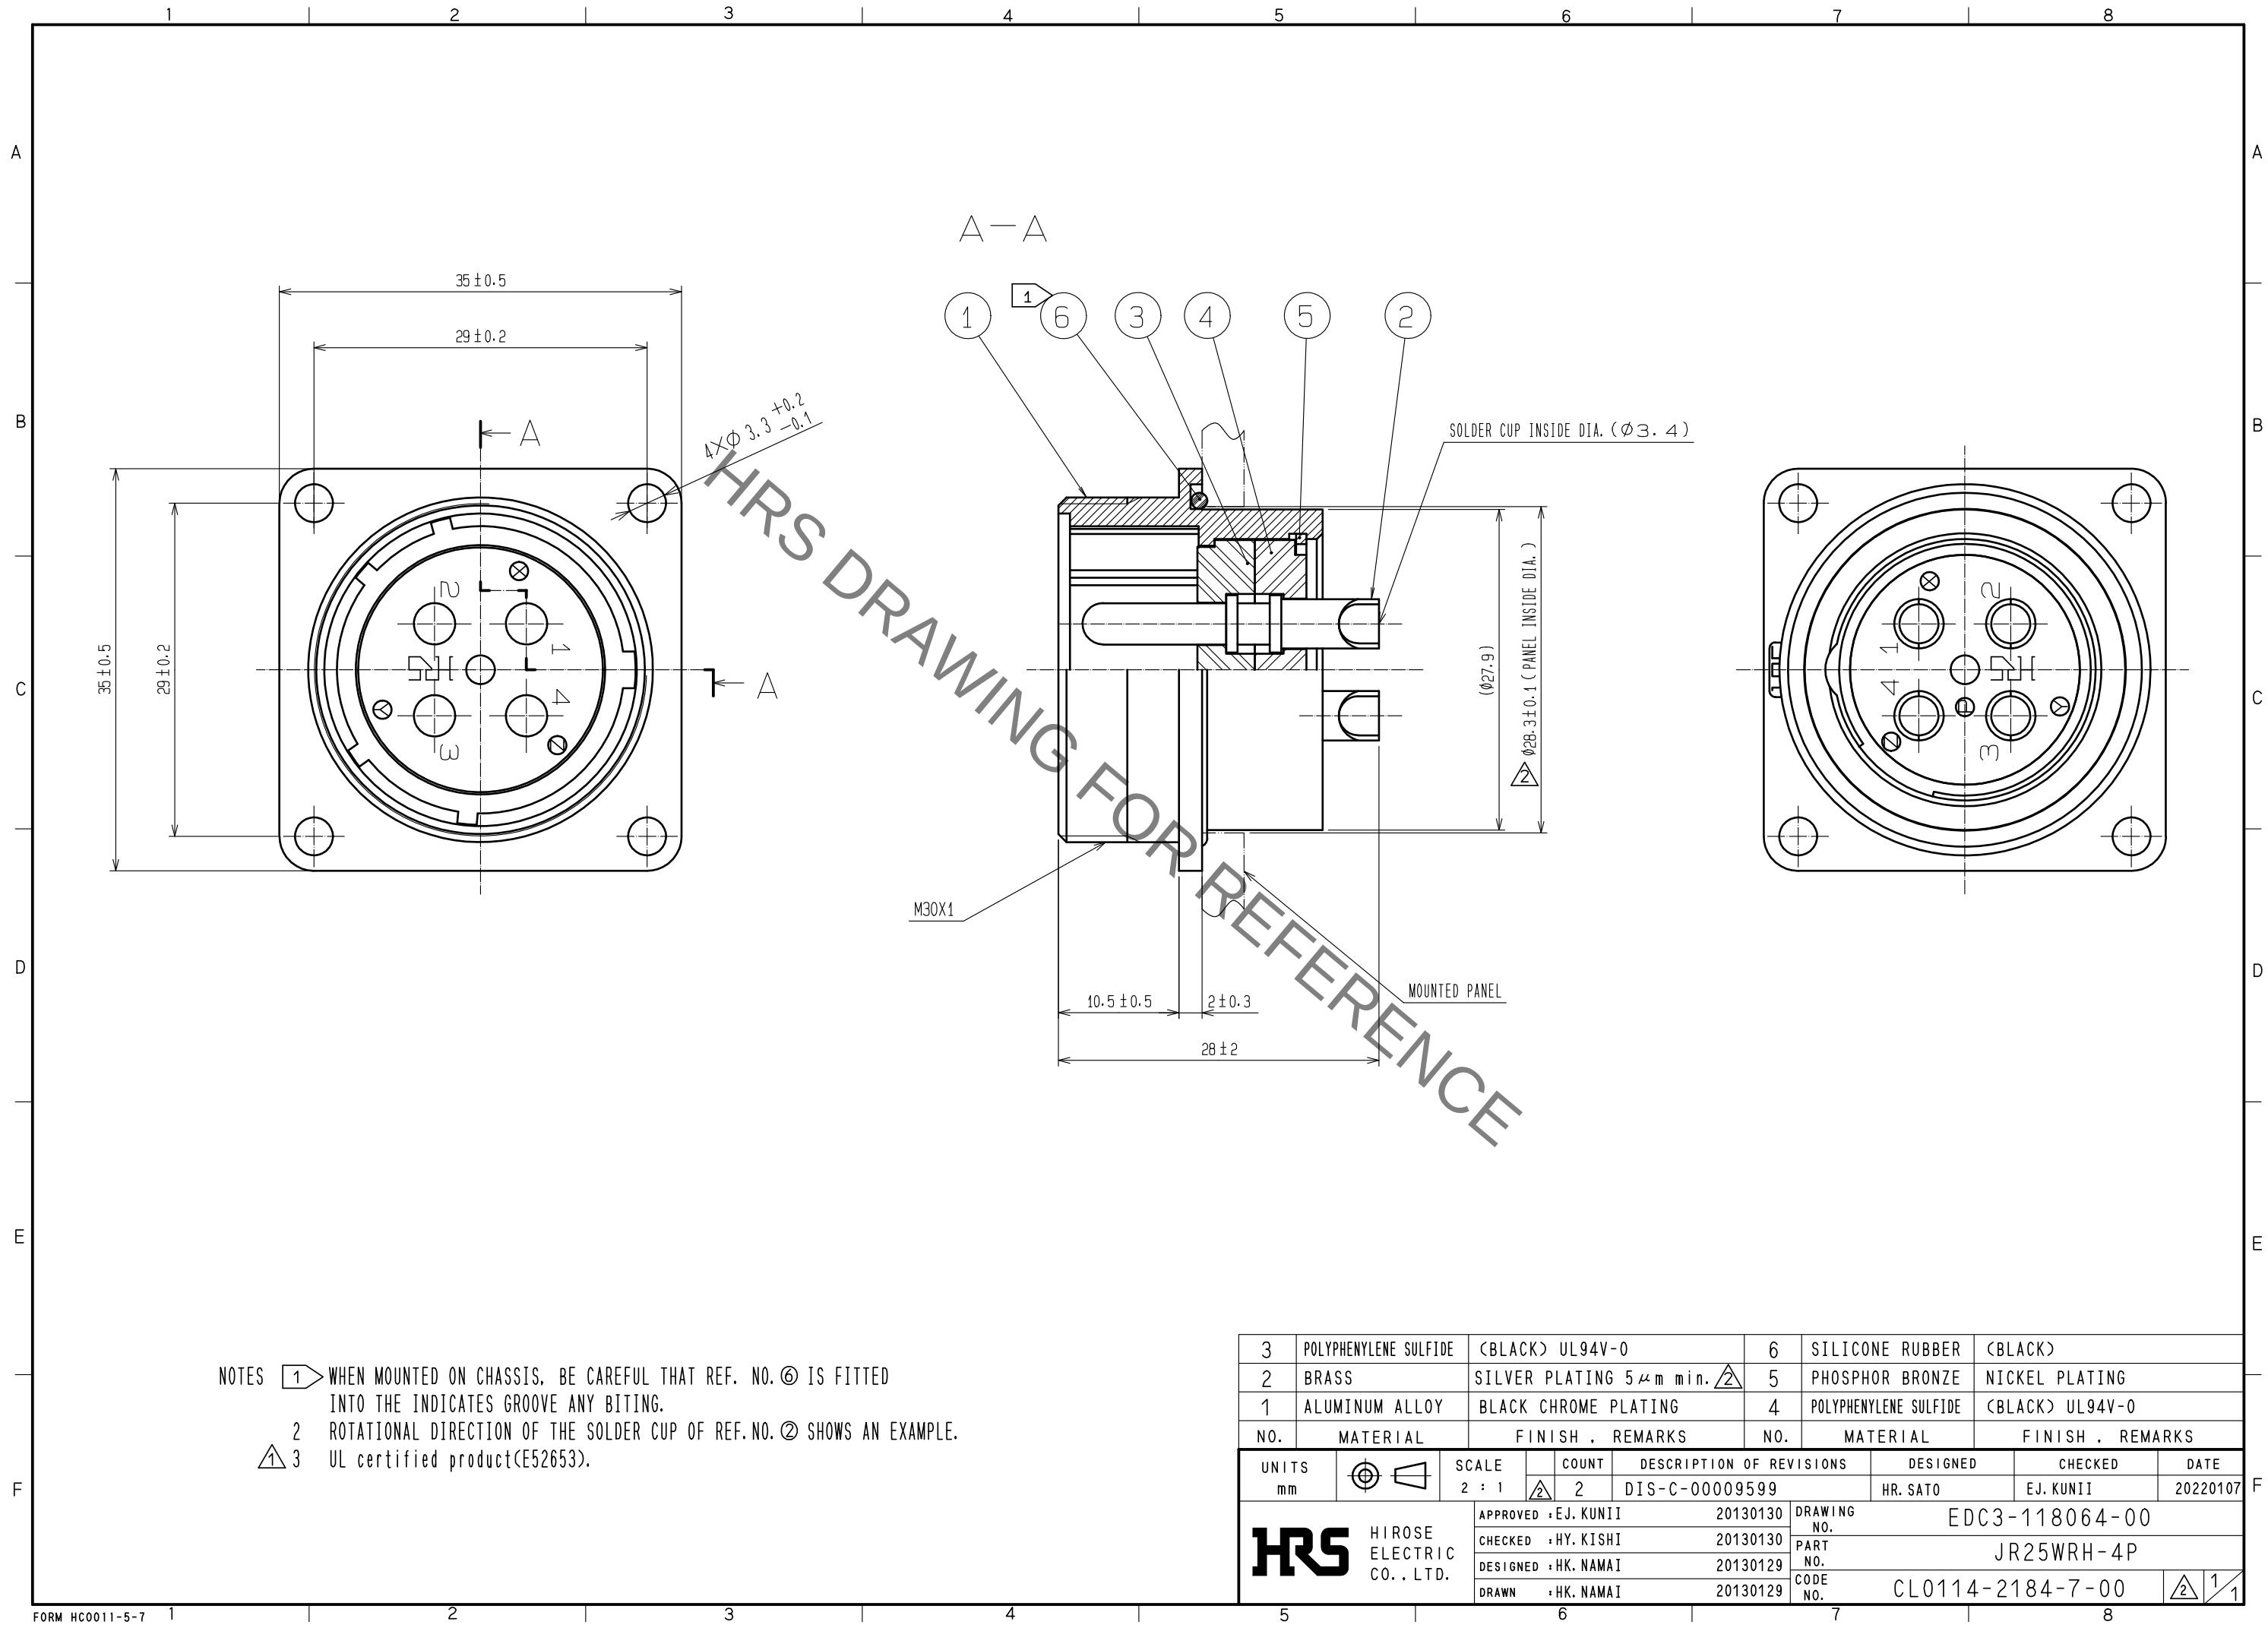


Feb.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTES ① WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REF. NO. ⑥ IS FITTED INTO THE INDICATES GROOVE ANY BITING.
2 ROTATIONAL DIRECTION OF THE SOLDER CUP OF REF.NO. ② SHOWS AN EXAMPLE.
③ UL certified product(E52653).

3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	SILICONE RUBBER	(BLACK)			
2	BRASS	SILVER PLATING 5μm min. 	5	PHOSPHOR BRONZE	NICKEL PLATING			
1	ALUMINUM ALLOY	BLACK CHROME PLATING	4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00009599	DESIGNED HR. SATO	CHECKED EJ. KUNII	DATE 20220107
 HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	20130130	DRAWING NO.	EDC3-118064-00			
		CHECKED : HY. KISHI	20130130	PART NO.	JR25WRH-4P			
		DESIGNED : HK. NAMAI	20130129	CODE NO.	CL0114-2184-7-00			
		DRAWN : HK. NAMAI	20130129	  				