


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△						△					
△						△					
△						△					

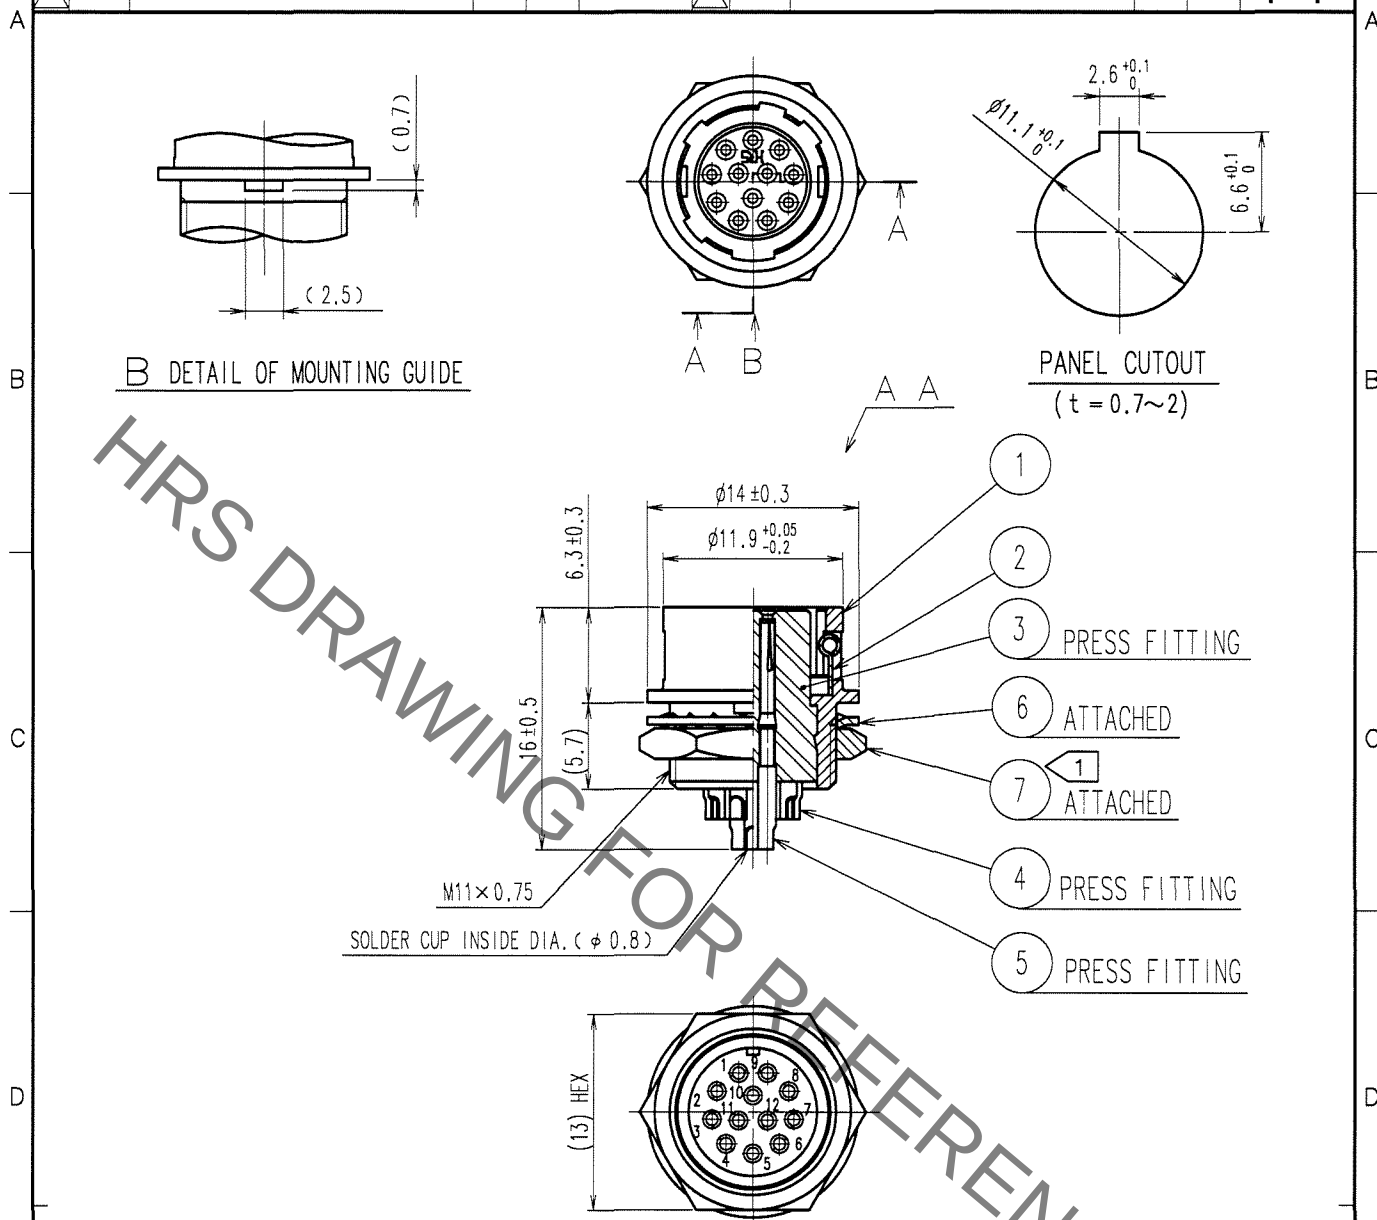

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑦ FROM LOOSENING.

			7	BRASS	NICKEL PLATING
3	POLYAMIDE	(BLUE)	6	PHOSPHOR BRONZE	NICKEL PLATING
2	STAINLESS STEEL		5	BERYLLIUM COPPER	GOLD PLATING 0.2μm min.
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	NICKEL UNDER PLATING 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		<i>T. Komatsu</i>	<i>D. Matsume</i>	<i>E. Kunii</i>	<i>M. Sato</i>	
		05.11.30	05.11.30	05.11.30	05.11.30	

	DRAWING NO.	PART NO.
	EDC4-007770-73	HR10-10R-12S(73)
	CODE NO.	CL110-0035-0-73
SCALE 2 : 1		
UNITS mm		

HRS

HIROSE ELECTRIC CO., LTD.

CL110-0035-0-73