

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	510650600	Micro-Latch 2.0 Rec Housing 6P		1	PC
B	503728000	Micro-Latch 2.0 Crimp R Term Tin #22-26		6	PC
C	--	PAPER PRINTED PAPER WHITE (S100X150YAJ)		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A6	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

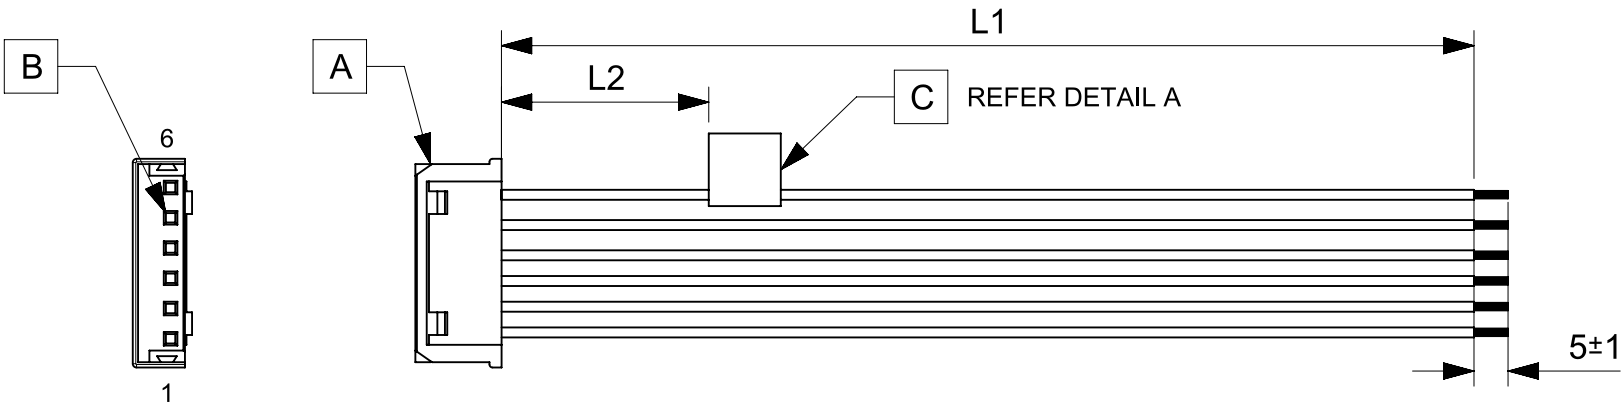


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196791060	50±3	15	Micro Latch 2.0 R-S 6ckt 50mm disc Sn
2196791061	100±3	15	Micro Latch 2.0 R-S 6ckt 100mm disc Sn
2196791062	150±4	15	Micro Latch 2.0 R-S 6ckt 150mm disc Sn
2196791063	300±4	15	Micro Latch 2.0 R-S 6ckt 300mm disc Sn
2196791064	600±6	15	Micro Latch 2.0 R-S 6ckt 600mm disc Sn

NOTES

- Connector view shown is from mating side.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in Flag type on a single cable.
- Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning Dia must be 0.9 mm Max.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2022/02/27	A	INITIAL RELEASE	SAIKIG

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
	mm	NTS	
	GENERAL TOLERANCES (UNLESS SPECIFIED)		
DIVISIONAL SYMBOLS	ANGULAR TOL	±	°
	4 PLACES	±	
	3 PLACES	±	
	2 PLACES	±	
DIVISIONAL SYMBOLS	1 PLACE	±	
	0 PLACES	±	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING
			SERIES
		A4-SIZE	219679
		MATERIAL NUMBER	CUSTOMER
		SEE TABLE	GENERAL MARKET
		SHEET NUMBER	1 OF 1

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2196791060	PSD	000	A

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/08	14:03:43
-----------------	----	--------------	------------	----------