NOTES:

1. MATERIALS:
   - CONTACT: BERYLLIUM COPPER
   - ALL OTHER METAL PARTS: STAINLESS STEEL
   - INSULATOR: ULTEM1000
2. FINISH:
   - CONTACT: GOLD
   - ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:
   - DURABILITY: 500 CYCLES
4. ELECTRICAL:
   - IMPEDANCE: 50Ω
   - FREQUENCY RANGE: DC to 40GHz
   - VSWR(dB): 1.1:1 (-26.44dB)

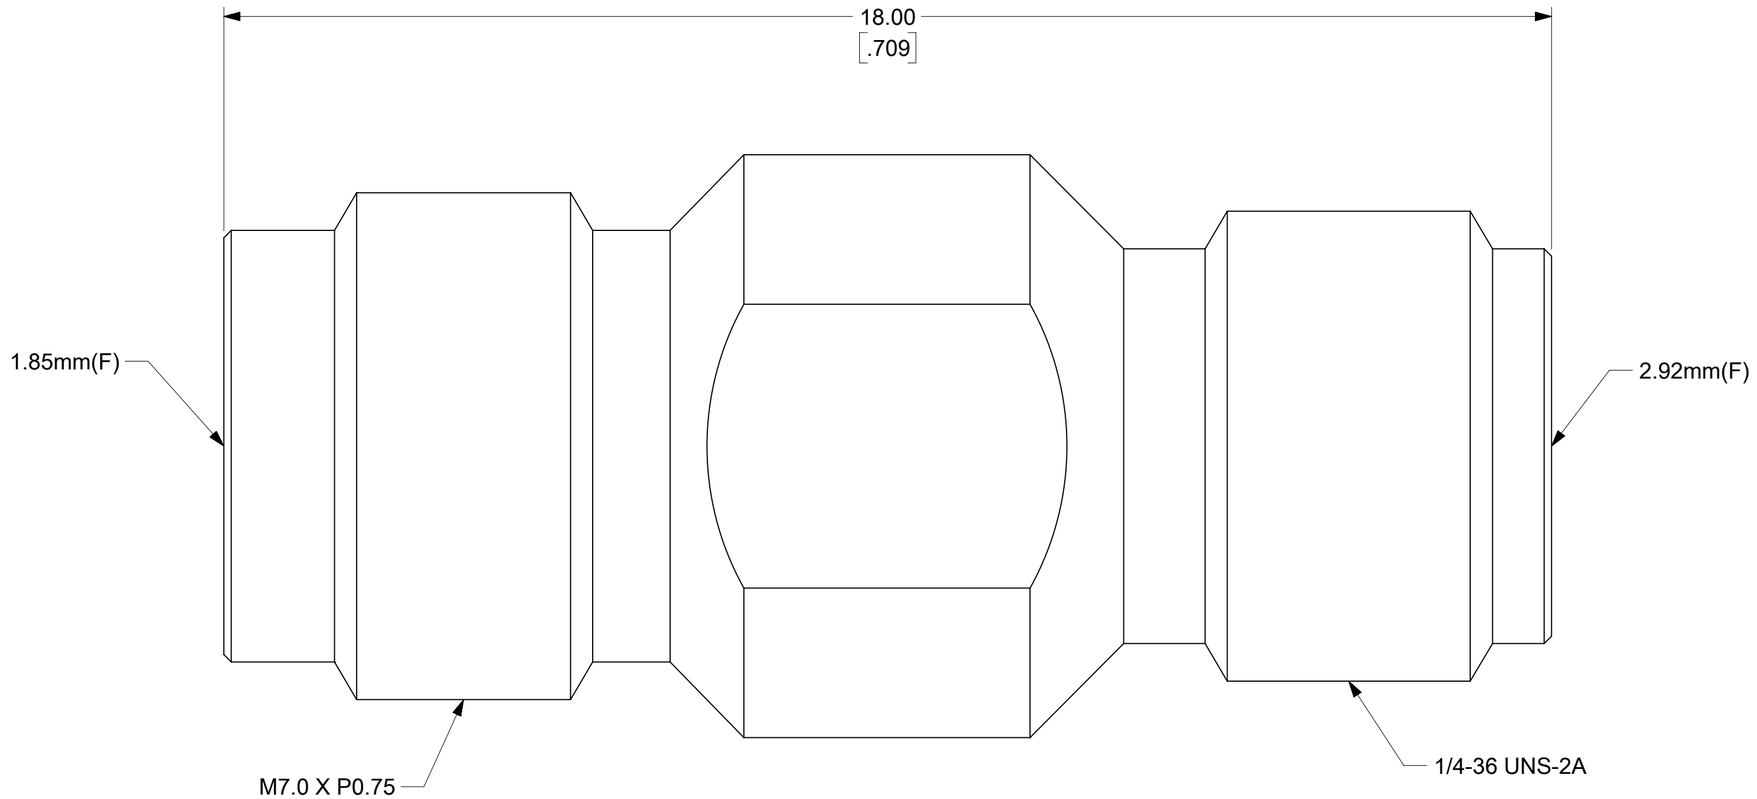

DOCUMENT STATUS	P1	RELEASE DATE	2023/01/19 15:06:01								

FORMAT: Eng-lega-master-B-prod-C
REVISION: E1
DATE: 2021/05/01

FUNCTIONAL SYMBOLS											
FA = 0											
FC = 0											
FP = 0											
DIVISIONAL SYMBOLS											

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: MM/INCH
SCALE: NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	±	±
1 PLACE	±	±
0 PLACES	±	±
ANGULAR TOL	± °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: UPDATED TO GENERAL MARKET

EC NO: 735515
DRWN: KTAGAN 2023/01/18
CHK'D: LMEIER 2023/01/18
APPR: JBORRELLI 2023/01/19

INITIAL REVISION:
DRWN: VISHNM2 2022/11/24
APPR: LMEIER 2022/12/15

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 73386

molex

1.85MM JACK TO 2.92MM JACK ADAPTER

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
733862320	PSD	000	A1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
733862320		1 OF 1