
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 47425	05/23	
			SEE PDM

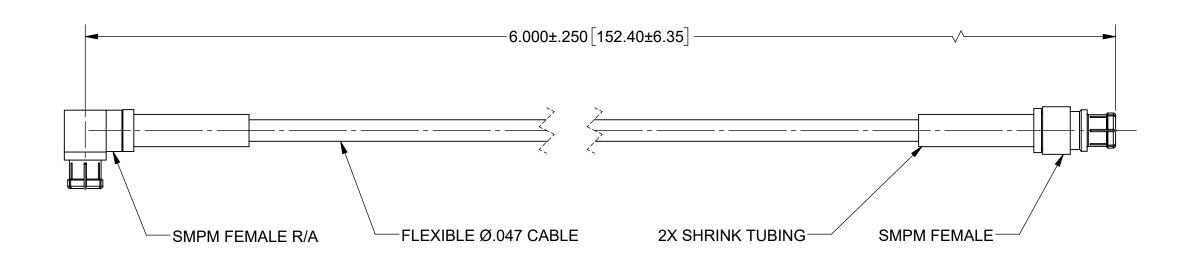

COMPONENTS:

SMPM FEMALE R/A (3222-40006) **CONNECTORS**:

SMPM FEMALE (3221-40007)

FLEXIBLE Ø.047 CABLE (200-70-214 OR EQUIVALENT) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE: 50 OHMS DC TO 40.0 GHz.

SEE NOTES
SEE NOTES
N/A
OPRIETARY
CONTAINED IN THIS DRAW ERTY OF SV MICROWAVE, I DN IN PART OR AS A WHOLE ITEN PERMISSION OF
(

	DIMENSIONS ARE IN INCHES TOLERANCES:
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' +15'
	DECIMAL: .X ±.030 .XX +.010
_	XXX ±.010

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 THIRD

D ANGLE PROJECTION	DRAWN:	KRR 05/10/23
	CHECKED:	SEE PDM
	APPROVED:	SEE PDM

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES. 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63. MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

Amphenol
MICROWAVE microwave.com

FEMALE 6" CABLE ASSEMBLY FOR Ø.047 CABLE

,	SIZE B	DWG. NO.	7032-9731		
	SCALE: 4:1			SHEET 1 OF 1	