



DIMENSIONS:	
A	2.33" ± 0.063
B	2.34" ± 0.125
C	1.98" ± 0.063

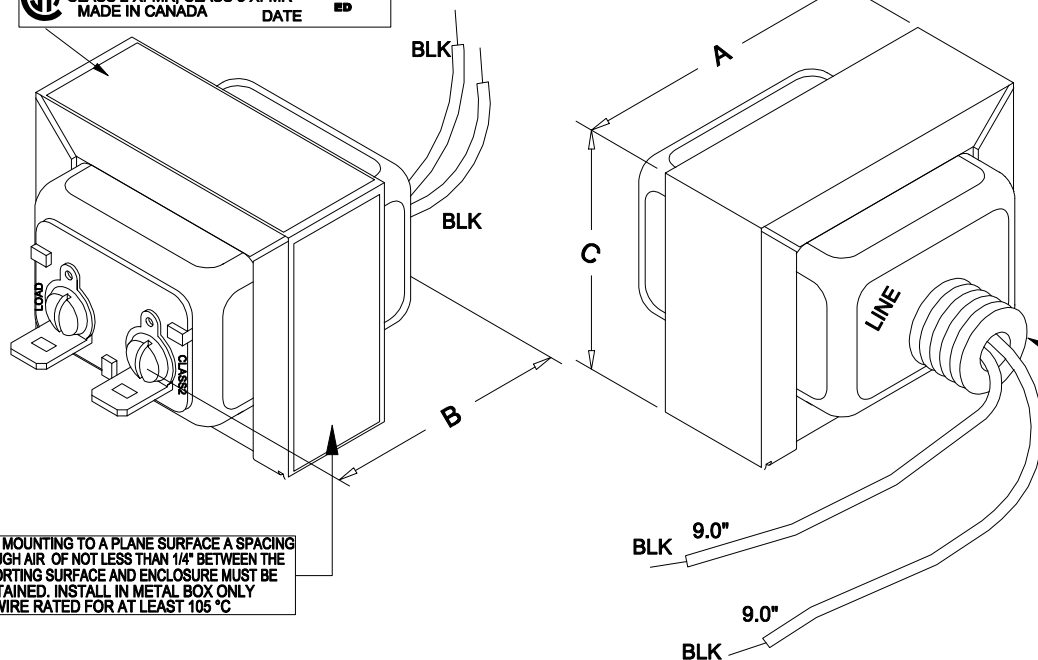

OFFSET TO BOTTOM

WHEN MOUNTING TO A PLANE SURFACE A SPACING THROUGH AIR OF NOT LESS THAN 1/4" BETWEEN THE SUPPORTING SURFACE AND ENCLOSURE MUST BE MAINTAINED. INSTALL IN METAL BOX ONLY USE WIRE RATED FOR AT LEAST 105 °C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, BLK - BLK	100mA	Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK		
	TER - TER =	17.13V	$\pm 2\%$
DCR	@ 20°C, BLK - BLK =	50.10 Ω	$\pm 20\%$
	@ 20°C, TER - TER =	0.740 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 01/18/19	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CLASS 2 - PLUG IN ENERGY LIMITING TX.	
			DATE: 01/18/19	APP'D. BY:		
				DIMENSIONS: IN(X) MM()	DWG. NO. BD2EE	

PH # (519) 886-6181
FAX # (519) 886-9540