



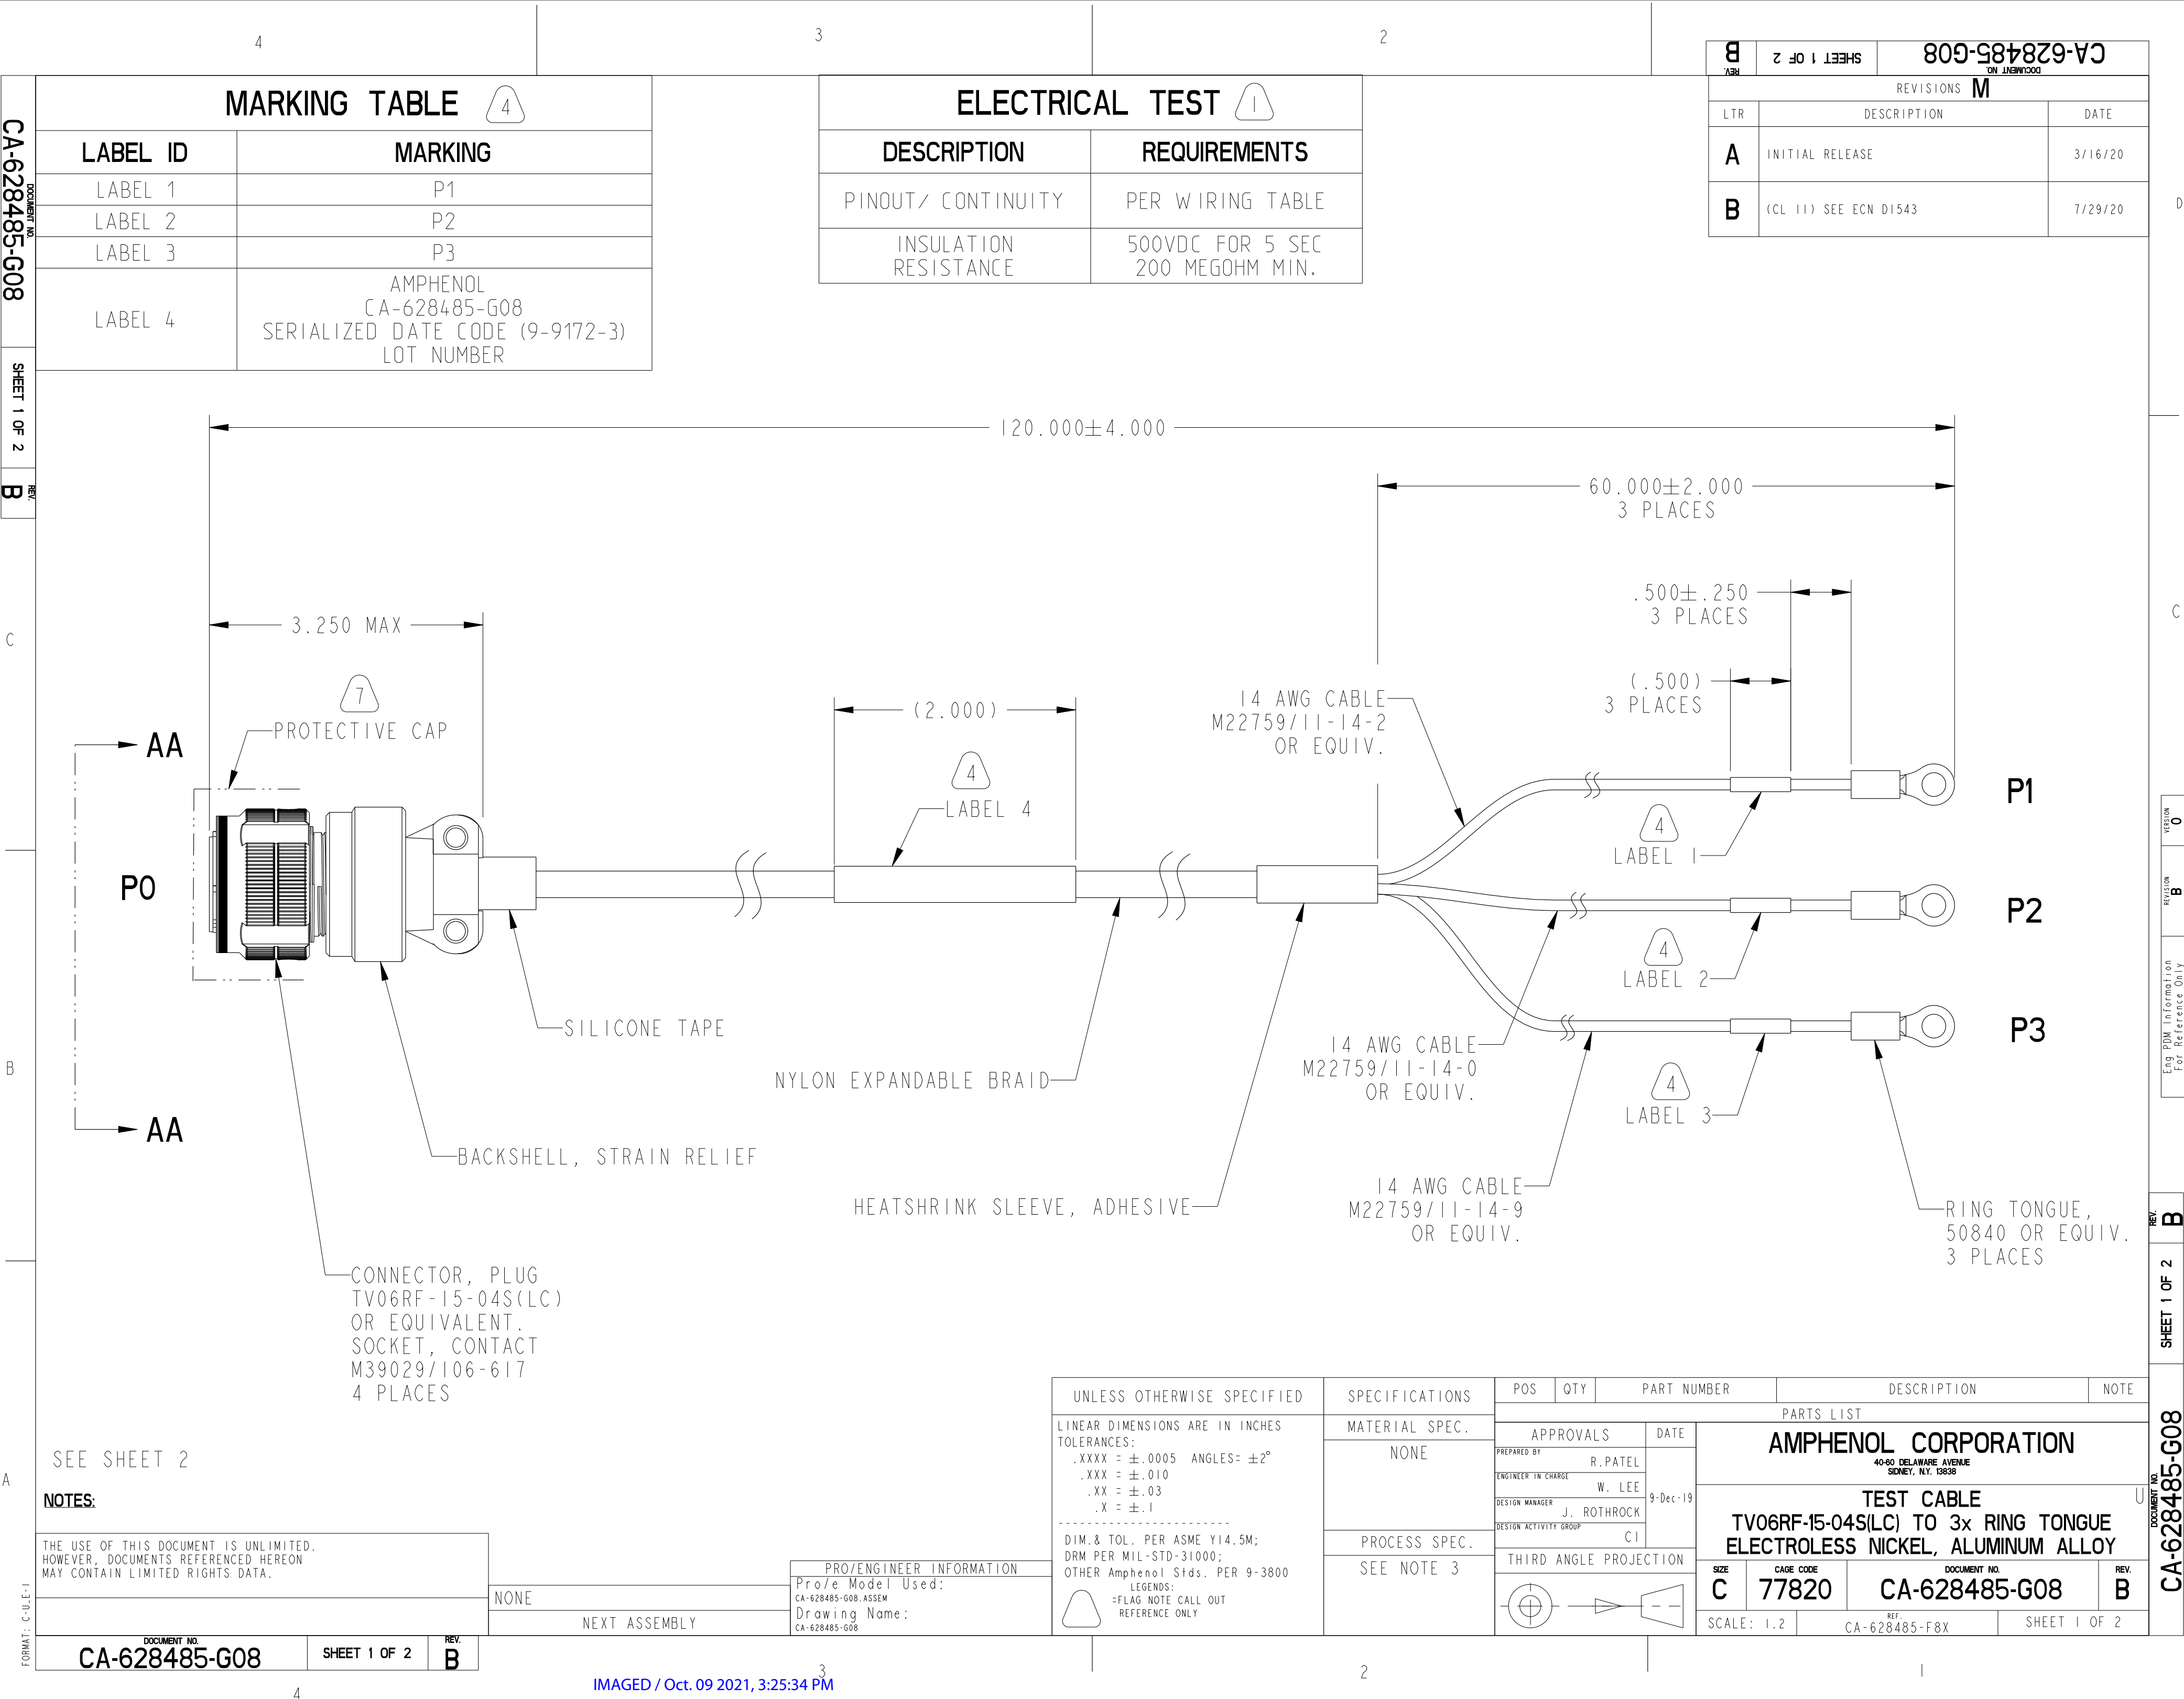

WIRING TABLE

PO CONNECTOR CAVITY ID	RING TONGUE CONNECTOR ID	14 AWG WIRE P/N	WIRE COLOR
A	P1	M22759/11-14-2	RED
B	P2	M22759/11-14-0	BLACK
C	P3	M22759/11-14-9	WHITE
D	NOT CONNECTED		

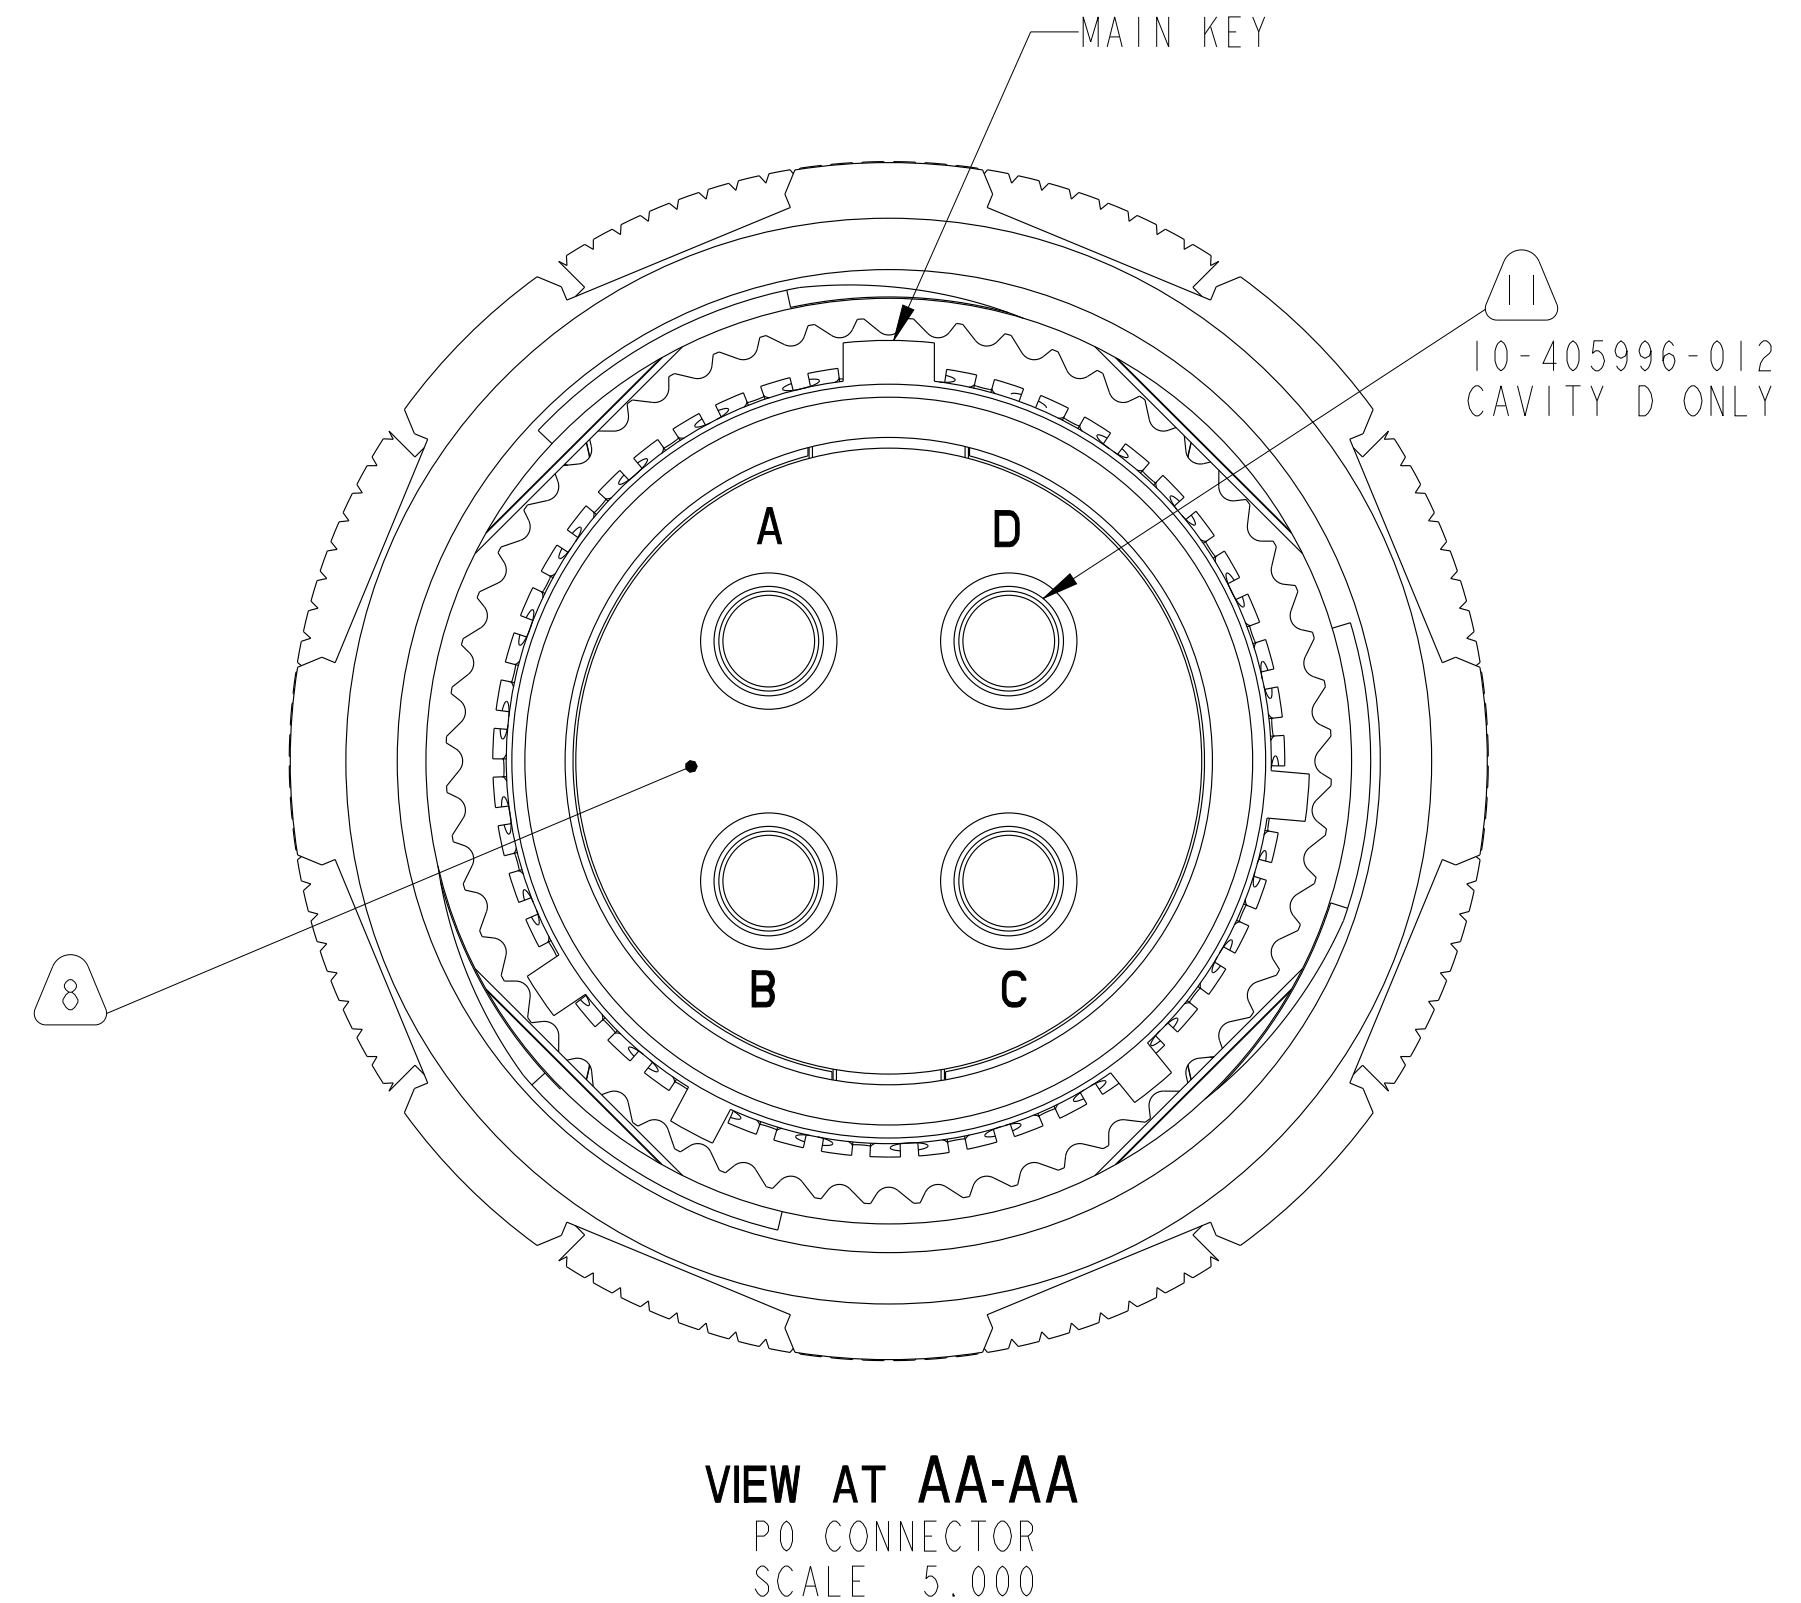

1. PO CONNECTOR CAVITY D CONTACT SHALL BE BACKED BY SIZE 12 SEALING PLUG.
10. CABLE ASSEMBLY SHALL BE MANUFACTURED AND INSPECTED IN ACCORDANCE WITH IPC/WHMA-A-620, CLASS 3.
9. PO CONNECTOR SHELL IS ELECTROLESS NICKEL PLATED ALUMINUM ALLOY.
8. SEE L-21815-4 FOR INSERT ARRANGEMENT.
7. PROTECTIVE CAP SHALL BE INSTALLED PRIOR TO SHIPPING.
6. SEE WORK ORDER FOR PERMISSIBLE ADDITIONAL OR ALTERNATE MARKING.
5. CABLE ASSEMBLIES SHALL BE INSTALLED IN CONNECTOR TO MEET THE REQUIREMENTS OF THE WIRING TABLE.
4. MARKING SHALL BE APPLIED WITH BLACK INK ON WHITE LABEL PER MARKING TABLE. LABEL 4 SHALL BE LOCATED APPROXIMATELY AT THE CENTER OF THE HARNESS.
3. PROCESS SPEC:
9-9172-3
2. PACKAGE PER PRODUCTION PROCESS SHEET.
1. CABLE ASSEMBLY SHALL BE TESTED PER ELECTRICAL TEST TABLE.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.