


Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

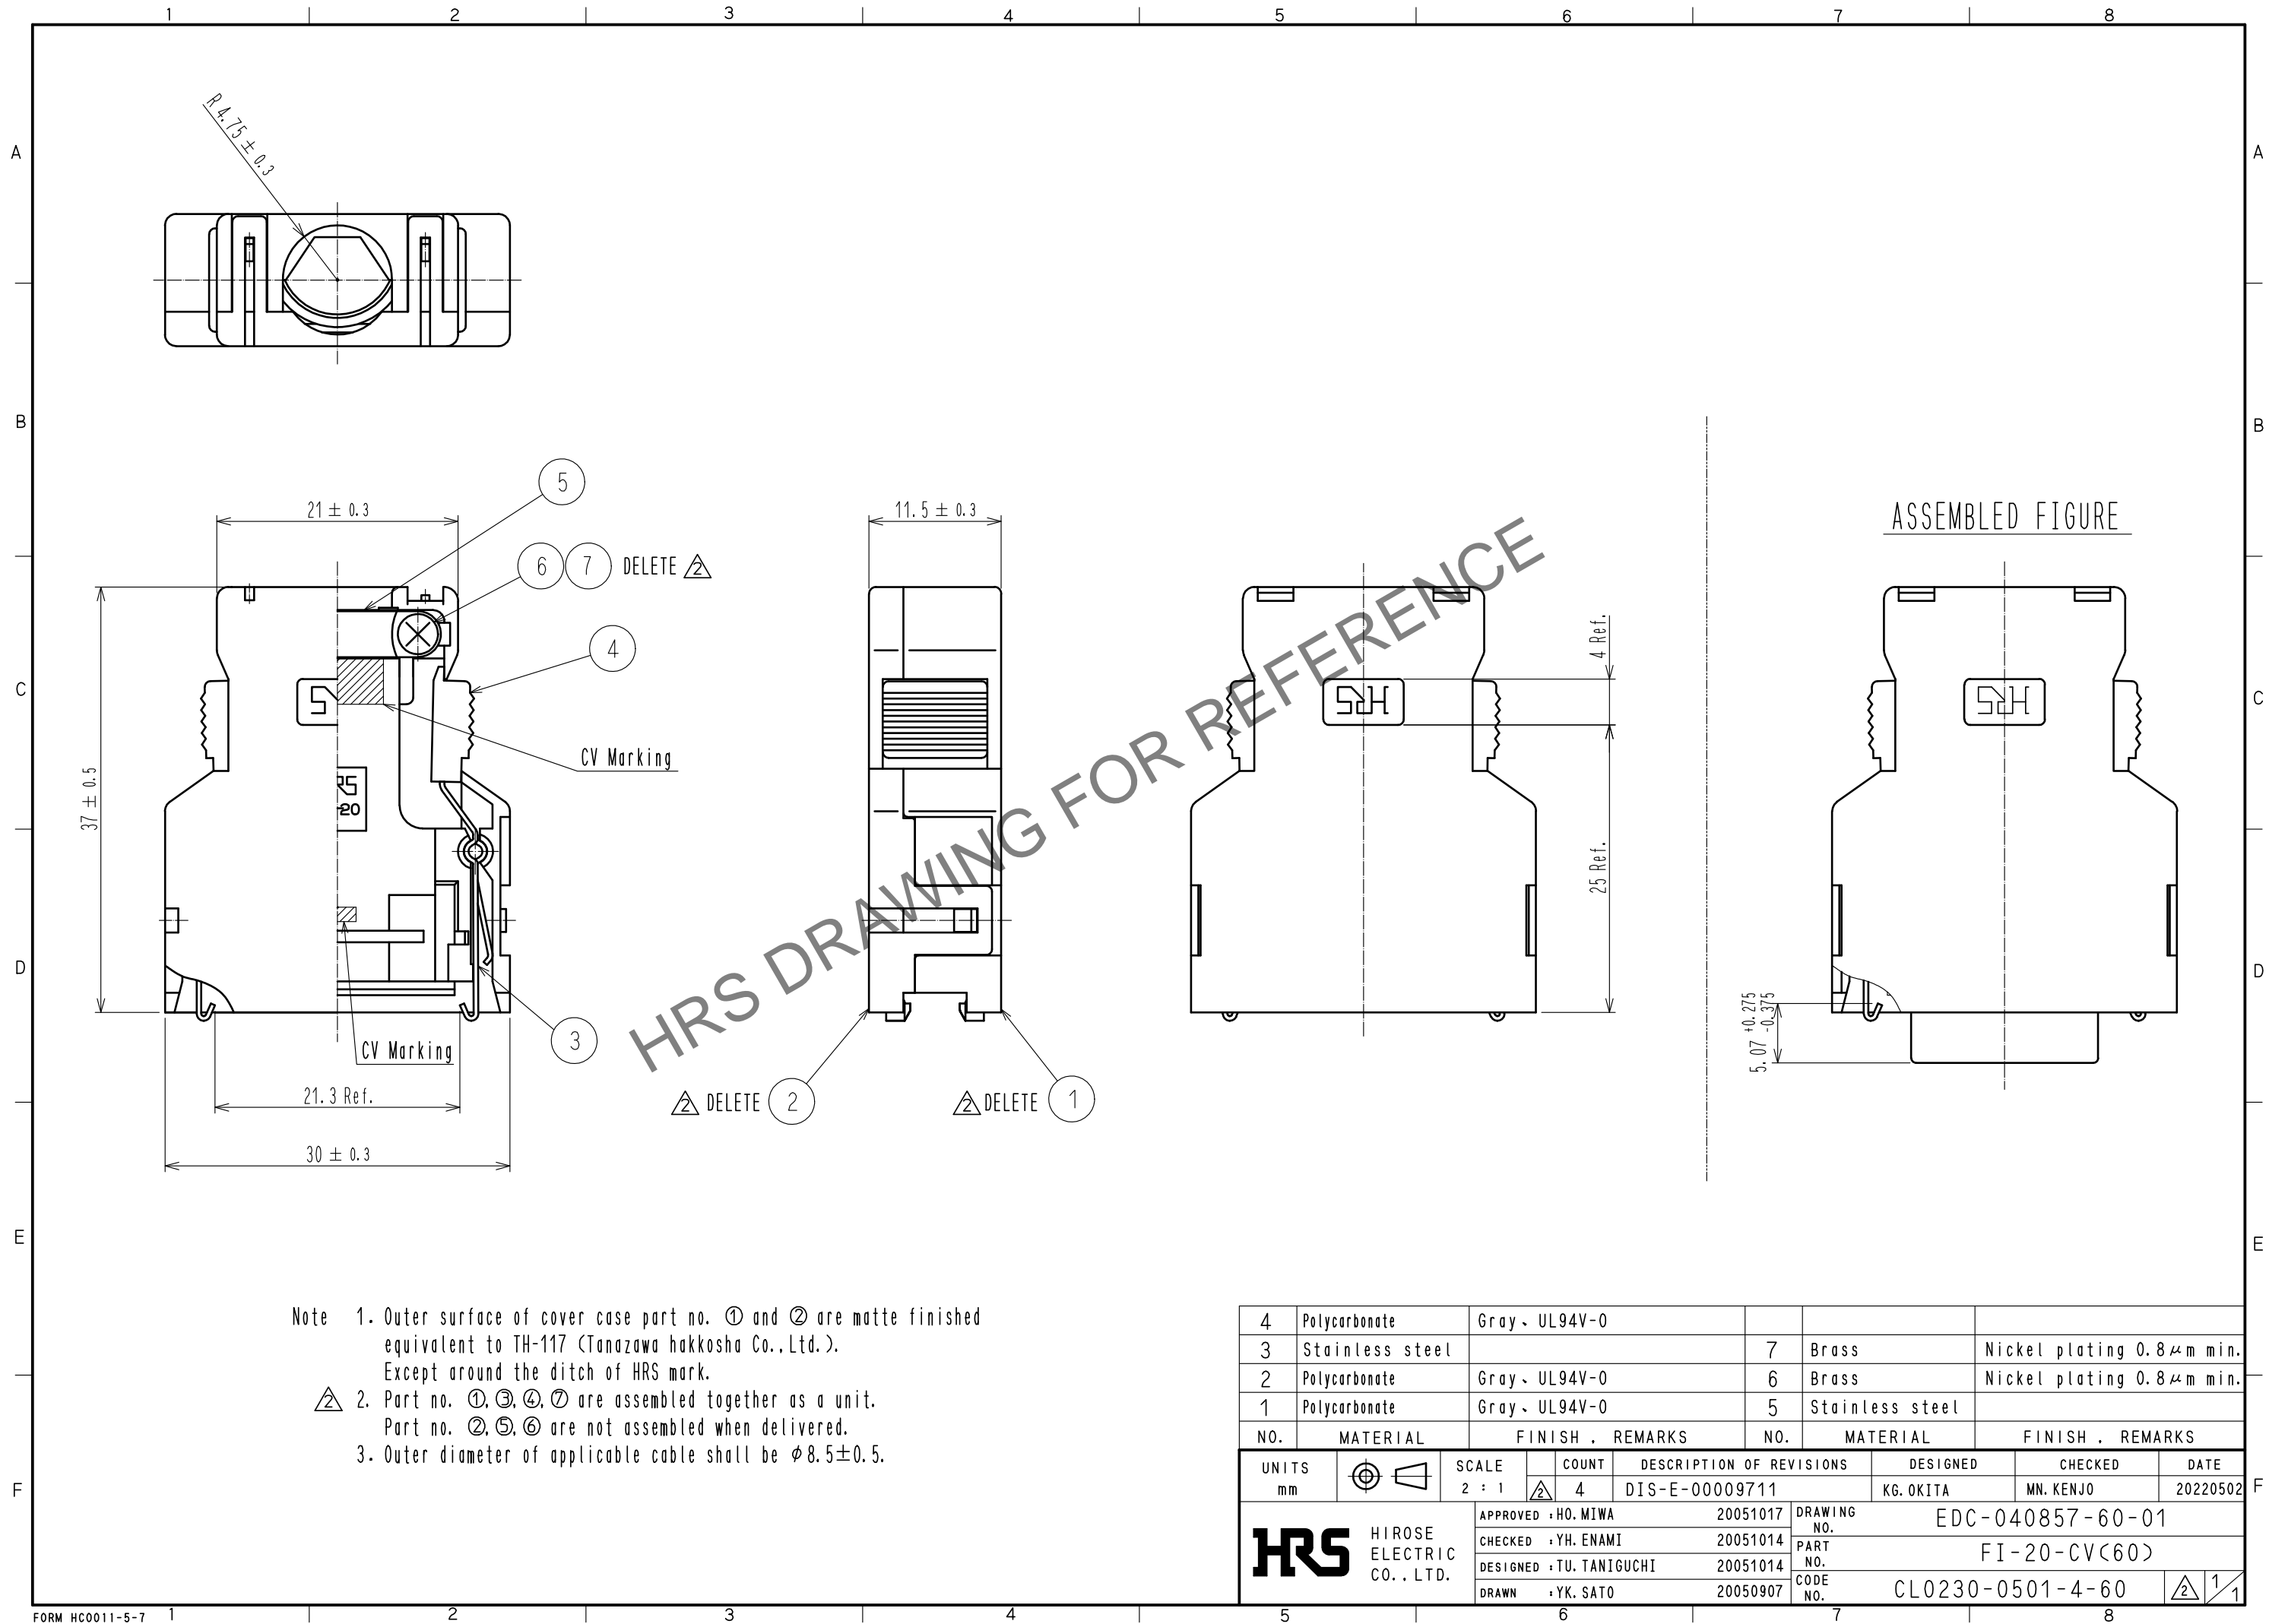

Note 1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co.,Ltd.).
Except around the ditch of HRS mark.
② 2. Part no. ①,③,④,⑦ are assembled together as a unit.
Part no. ②,⑤,⑥ are not assembled when delivered.
3. Outer diameter of applicable cable shall be $\phi 8.5 \pm 0.5$.

| | | | | | |
|---------------------------------|-----------------|--------------------------|------------|--|---------------------------------|
| 4 | Polycarbonate | Gray, UL94V-0 | | | |
| 3 | Stainless steel | | 7 | Brass | Nickel plating 0.8 μ m min. |
| 2 | Polycarbonate | Gray, UL94V-0 | 6 | Brass | Nickel plating 0.8 μ m min. |
| 1 | Polycarbonate | Gray, UL94V-0 | 5 | Stainless steel | |
| NO. | MATERIAL | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS |
| UNITS mm | | SCALE 2 : 1 | COUNT 4 | DESCRIPTION OF REVISIONS DIS-E-00009711 | DESIGNED KG. OKITA |
| HIROSE ELECTRIC CO., LTD. | | APPROVED : HO. MIWA | 20051017 | DRAWING NO. | EDC-040857-60-01 |
| | | CHECKED : YH. ENAMI | 20051014 | PART NO. | FI-20-CV(60) |
| | | DESIGNED : TU. TANIGUCHI | 20051014 | CODE NO. | CL0230-0501-4-60 |
| | | DRAWN : YK. SATO | 20050907 | | |
| | | | | | 1/1 |