

6

5

4

3

2

1

D

D

C

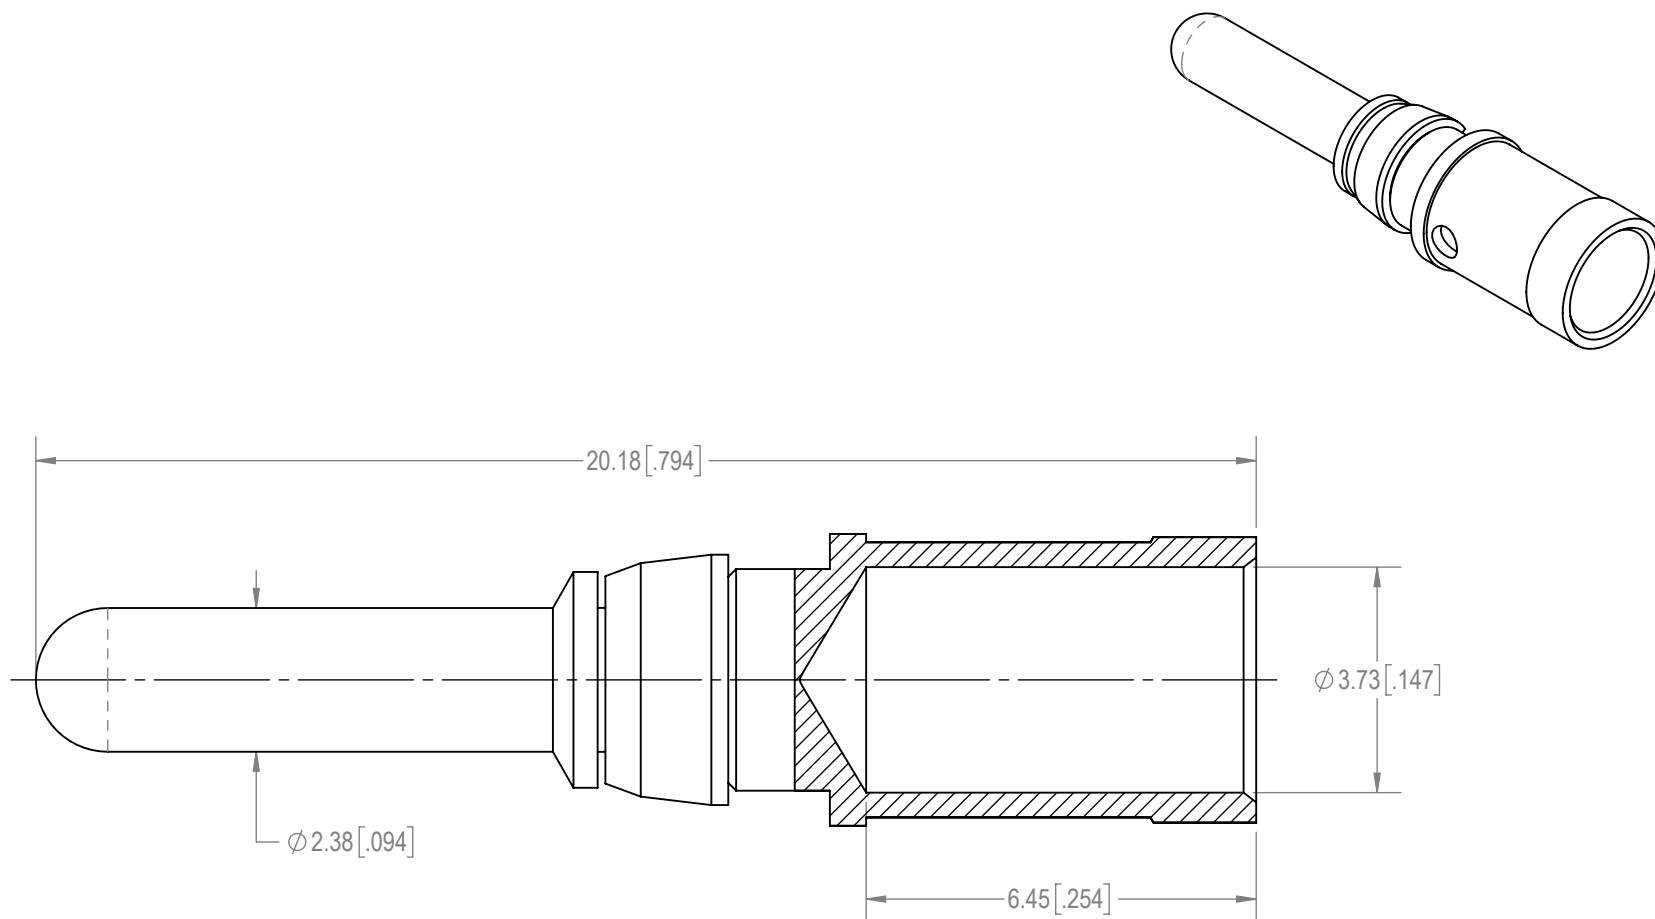
C

B



B

A

A

**NOTES:**

1. MATERIALS AND FINISH:
CONTACT: PRECISION MACHINED HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
RETENTION RING: POLYETHERIMIDE, BLACK COLOR.
2. DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN LATEST INFINITY PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
3. CRIMPING TOOL INFORMATION IS AVAILABLE AT WWW.CONNECTPOSITRONIC.COM/CrimpToolCrosslist.
4. CONTACTS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.

BY SB		CHK SS		3RD ANGLE 		<p>POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.</p>  <p>Positronic® CONNECTPOSITRONIC.COM</p>	
APR PA		RELEASED DATE: 2021-03-20		SCALE NTS			
TOLERANCES +0.03mm [.001 INCHES] FOR MALE CONTACT MATING DIAMETERS +0.08mm [.003 INCHES] FOR CONTACT TERMINATION DIAMETERS +0.13mm [.005 INCHES] FOR ALL OTHER DIAMETERS +0.38mm [.015 INCHES] FOR ALL OTHER DIMENSIONS ±5° FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]				PART NUMBER MC610NS/AA		SERIES IP	
				TITLE MC610NS/AA			
CREATED ON: 2021-03-20				SHEET SHEET 1 OF 1		REV B	

6

5

4

3

2

1