ITEM	PART#	DESCRIPTION	QTY	UOM
A	348033212	CTX64 RCPT TERM ST SN L DWIND MS GEN	1	PC

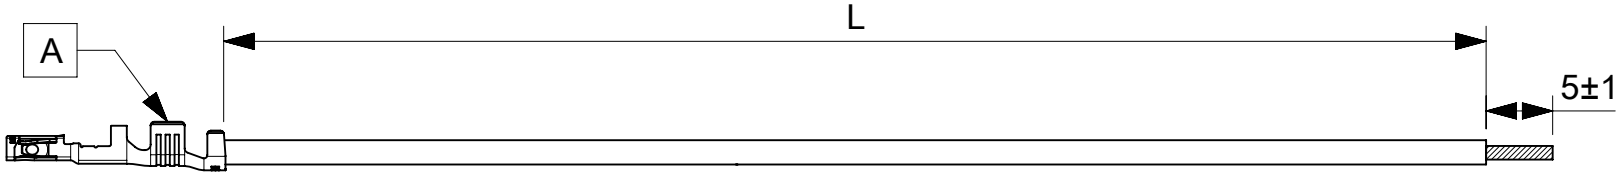

PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2244521111	Stac64 F-S 75mm 0.75sq.mm Lead BK Sn	1CX0.75SQMM DISC PVC BK FLRYW125-B	75±3	BLACK
2244521112	Stac64 F-S 150mm 0.75sq.mm Lead BK Sn	1CX0.75SQMM DISC PVC BK FLRYW125-B	150±4	BLACK
2244521113	Stac64 F-S 225mm 0.75sq.mm Lead BK Sn	1CX0.75SQMM DISC PVC BK FLRYW125-B	225±4	BLACK
2244521114	Stac64 F-S 300mm 0.75sq.mm Lead BK Sn	1CX0.75SQMM DISC PVC BK FLRYW125-B	300±4	BLACK
2244521115	Stac64 F-S 450mm 0.75sq.mm Lead BK Sn	1CX0.75SQMM DISC PVC BK FLRYW125-B	450±4	BLACK

NOTES:
1. CRIMPING TO BE DONE AS PER MOLEX STANDARDS.
2. THE PRODUCT SPECIFICATION RELIES ON THE TERMINALS & WIRE SPEC.
3. FREE ENDS MUST BE STRIPPED,TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIAMETER MUST BE 2.5MM MAX.
4. TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
02/20/2023	A	INITIAL RELEASE	MARUTG
DOCUMENT STATUS	P1	RELEASE DATE	2023/03/16 02:43:54

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 742440
DRWN: MARUTG 2023/02/20
CHK'D: SKUMAR07 2023/03/16
APPR: SKUMAR07 2023/03/16

INITIAL REVISION:
DRWN: MARUTG 2023/02/20
APPR: SKUMAR07 2023/03/16

THIRD ANGLE PROJECTION | DRAWING: A4-SIZE | SERIES: 224452

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2244521111	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: master-tb-prod-A4
REVISION: J1
DATE: 2021/05/01