


Feb.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							. .			△							. .		
△										△							. .		
△										△							. .		

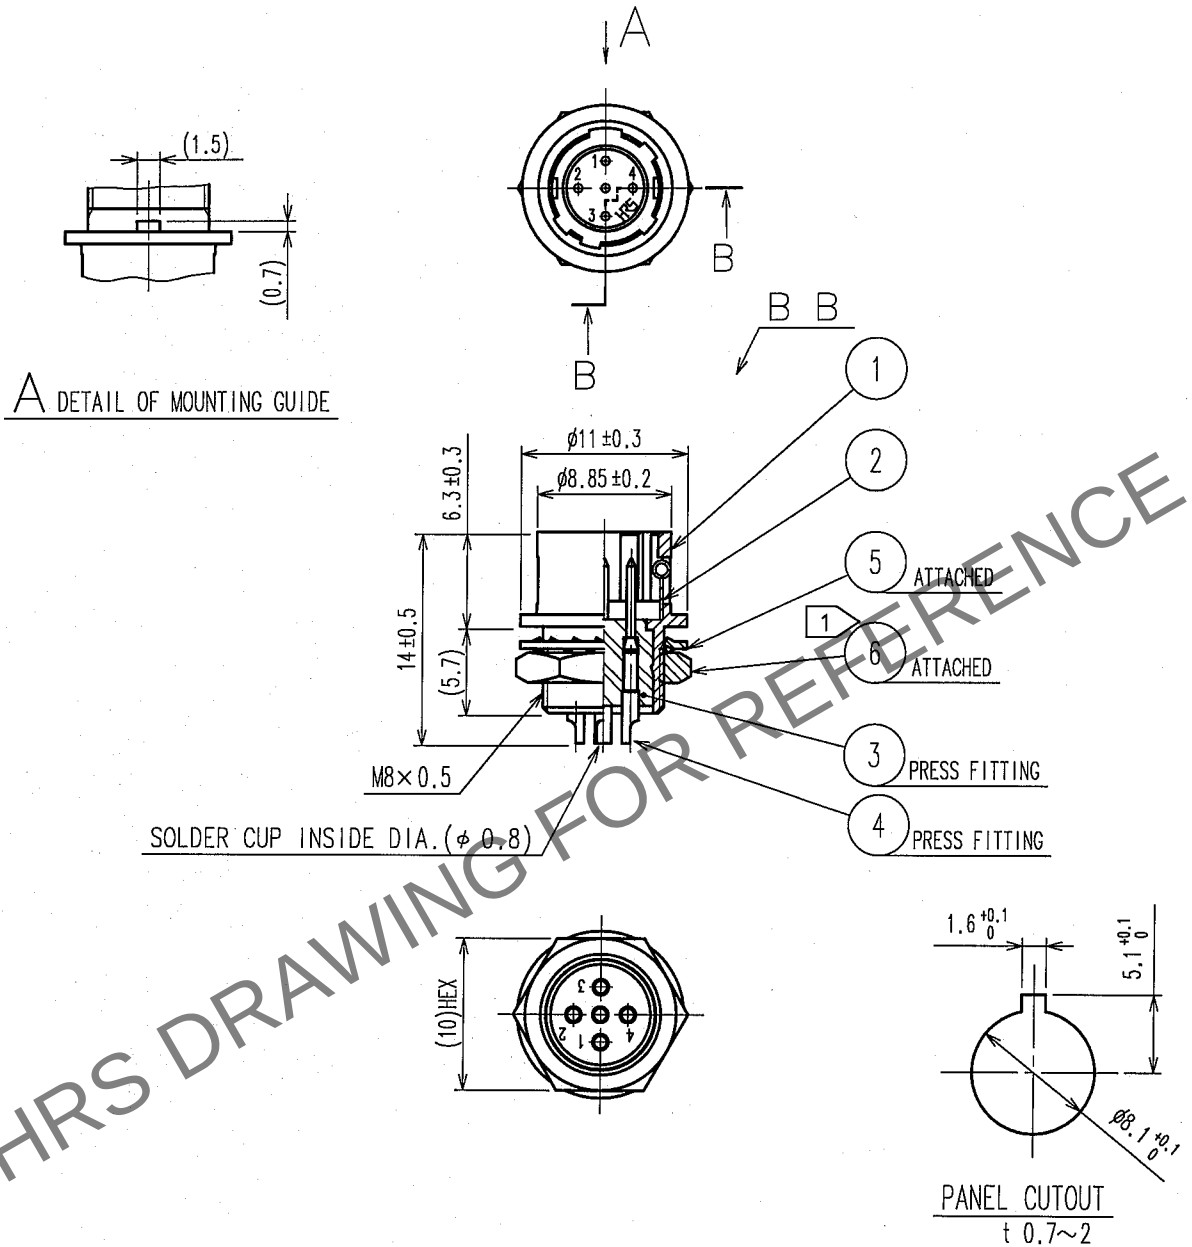

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ : 1.5N · m .
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ⑥ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	SILVER PLATING 2 μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL?			DRAWN	DESIGNED	CHECKED
			APPROVED	RELEASED	
			D. Matsune 05.09.01	D. Matsune 05.09.01	H. Kishi 05.09.01
				M. Sato 05.09.01	
DRAWING NO. EDC4-029109-73			PART NO. HR10A-7R-5P(73)		
SCALE 2 : 1			CODE NO. CL110-0321-0-73		
UNITS mm					

0
R

