



GAMMA series

6 Functions

7 time ranges

Wide supply voltage range

2 change over contacts

Width 22.5 mm

Industrial design



Technical data

1. Functions

| | |
|------|--|
| Ip | Asymmetric flasher pause first |
| li | Asymmetric flasher pulse first |
| ER | ON delay and OFF delay with control input |
| EWu | ON delay and single shot leading edge with control input |
| EWs | ON delay single shot leading edge voltage controlled |
| WsWa | Single shot leading and single shot trailing edge with control contact |

2. Time ranges

| Time range | Adjustment range | |
|------------|------------------|-------|
| 1s | 50ms | 1s |
| 10s | 500ms | 10s |
| 1min | 3s | 1min |
| 10min | 30s | 10min |
| 1h | 3min | 1h |
| 10h | 30min | 10h |
| 100h | 5h | 100h |

3. Indication

| | |
|------------------------------|------------------------------|
| Green LED U/t ON: | indication of supply voltage |
| Green LED U/t slow flashing: | indication of time period t1 |
| Green LED U/t fast flashing: | indication of time period t2 |
| Yellow LED R ON/OFF: | indication of relay output |

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
 Mounted DIN-rail TS 35 according to EN 50022
 Mounting position: any
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
 Tightening torque: max. 1Nm
 Terminal capacity:
 1 x 0.5 to 2.5mm² with/without multicore cable end
 1 x 4mm² without multicore cable end
 2 x 0.5 to 1.5mm² with/without multicore cable end
 2 x 2.5mm² flexible without multicore cable end

5. Input circuit

| | |
|--------------------------|-----------------------------------|
| Supply voltage: | terminals A1(+)-A2 |
| Types G2Z..12-240VAC/DC: | 12 to 240V AC/DC |
| Tolerance: | 12V-10% to 240V+10% |
| Rated consumption: | 6VA (2W) |
| Rated frequency: | AC 48 to 63Hz |
| Duty cycle: | 100% |
| Reset time: | 100ms |
| Residual ripple of DC: | 10% |
| Drop out voltage: | >30% minimum rated supply voltage |
| Overvoltage category: | III (according to IEC 60664-1) |
| Rated surge voltage: | 4kV |

6. Output circuit

| | |
|---------------------------------------|--|
| 2 potential free change over contacts | |
| Rated surge | 250V AC |
| Switching capacity (distance <5mm): | 750VA (3A / 250V AC) |
| Switching capacity (distance >5mm): | 1250V (5A / 250V AC) |
| Fusing: | 5A fast acting |
| Mechanical life: | 20 x 10 ⁶ operations |
| Electrical life: | 2 x 10 ⁵ operations at 1000VA resistive load |
| Switching frequency: | max. 60/min at 100VA resistive load max. 6/min at 1000VA resistive load (according to IEC 947-5-1) |
| Overvoltage category: | III. (according to IEC 60664-1) |
| Rated surge voltage: | 4kV |

7. Control contact

| | |
|------------------------------|--------------------------------------|
| Input not potential free: | terminals A1-B1 |
| Loadable: | yes |
| Max. line length: | 10m |
| Trigger level (sensitivity): | automatic adaption to supply voltage |
| Min. control pulse length: | DC 50 ms / AC 100 ms |

8. Accuracy

| | |
|------------------------|----------------------------|
| Base accuracy: | ±1% of maximum scale value |
| Adjusting accuracy: | <5% of maximum scale value |
| Repetition accuracy: | <0.5% or ±5ms |
| Voltage influence: | - |
| Temperature influence: | ≤0.01% / °C |


9. Ambient conditions

| | |
|------------------------|---|
| Ambient temperature: | -25 to +55°C (according to IEC 68-1) |
| Storage temperature: | -25 to +70°C |
| Transport temperature: | -25 to +70°C |
| Relative humidity: | 15% to 85% (according to IEC 721-3-3 Klasse 3K3) |
| Pollution degree: | 3 (according to IEC 664-1) |
| Vibration resistance: | 10 to 55 Hz 0.35mm (according to IEC 68-2-6) |
| Shock resistance: | 15g 11ms (according to IEC 68-2-27) |

Functions


Asymmetric flasher pause first (Ip)

When the supply voltage U is applied, the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into off-position (yellow LED not illuminated). The output relay is triggered at the ratio of t1:t2 until the supply voltage is interrupted.




Asymmetric flasher pulse first (Ii)

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay switches into off-position (yellow LED not illuminated) and the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into on-position (yellow LED illuminated). The output relay is triggered at the ratio of t1:t2 until the supply voltage is interrupted.



ON delay and OFF delay with control contact (ER)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay R switches into on-position (yellow LED illuminated). If the control contact is opened, the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into off-position (yellow LED not illuminated). If the control contact is opened before the interval t1 has expired, the interval already expired is erased and is restarted with the next cycle.

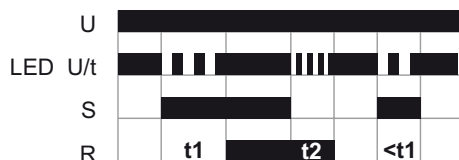


ON delay and single shot leading edge voltage controlled (EWu)

When the supply voltage U is applied, the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into off-position (yellow LED not illuminated). If the supply voltage is interrupted before the interval t1+t2 has expired, the interval already expired is erased and is restarted when the supply voltage is next applied.




ON delay and single shot leading edge with control contact (EWs)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

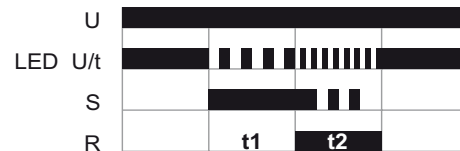


Single shot leading and single shot trailing edge with control contact (WsWa)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated) and the set interval t1 begins (green LED U/t flashes slowly). After the interval t1 has expired, the output relay R switches into off-position (yellow LED not illuminated). If the control contact is opened, the output relay again switches into on-position (yellow LED illuminated) and the set interval t2 begins (green LED U/t flashes fast). After the interval t2 has expired, the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times.

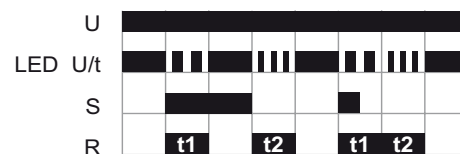


Connections

with control contact

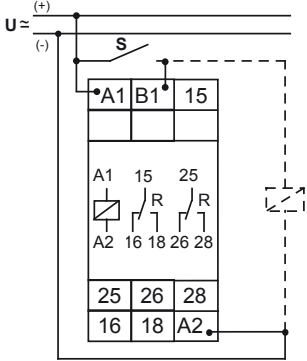

without control contact

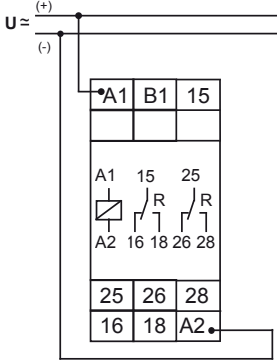

Dimensions

