

### Cleaning:

- > Disconnect the power and clean the exterior only of this fitting with a moist ( not wet ) cloth.
- > Do not use any chemical or abrasive cleaners.

### Lamp replacement:

- > Switch off the electricity at the mains.
- > Release the front cover by unscrewing the 4 fixing screws, taking care not to lose the "O" rings.
- > Remove the lamp by pulling gently away from the lampholder and lifting free
- > Fit replacement lamp by pushing it into the lampholder and refit the front cover.

### Replacement lamp type:

Wattage: 26W 4 Pin Energy Saving  
G24q-3 base

### Eventually, you may want to replace this light fitting:

When your light fitting comes to the end of its life or you choose to update or upgrade it by replacing it, please do not dispose of it with your normal household waste, please recycle where facilities exist. When you need to dispose of this fitting, check with your retailer or local authority for suitable options. New regulations will encourage the recycling of Waste from Electrical and Electronic Equipment ( European "WEEE Directive" effective August 2005 ).



### If you experience problems:

If your light is defective or develops a fault, please return it to the place where you bought it. You can call our Helpline for advice. The Helpline will gladly give advice on any aspect of any Eterna Lighting product but may not be able to give specific instructions regarding individual installations.  
**If in doubt, consult a qualified electrician.**

### Help line:

Tel: 01933 673 144 Fax: 01933 678 083 Email: [sales@eterna-lighting.co.uk](mailto:sales@eterna-lighting.co.uk)  
For answers to frequently asked questions ( FAQs ) and other information visit our web-site  
[www.eterna-lighting.co.uk](http://www.eterna-lighting.co.uk)



# IMPORTANT!

## Safety and Installation instructions

## Energy Saving Sign Light

Model(s)  
SL226W

### Pack contents:

Floodlight	1
26W compact fluorescent lamps	2

**PLEASE READ THESE INSTRUCTIONS BEFORE  
INSTALLING YOUR NEW FITTING**

**PLEASE RETAIN FOR FUTURE REFERENCE**


## Read this first:

- > **This light fitting must be installed in accordance with the Building Regulations.** These may be obtained from HMSO or viewed and downloaded from [www.odpm.gov.uk](http://www.odpm.gov.uk) following the link for Building Regulations.
- > **If in any doubt, consult a qualified electrician.**
- > Switch off the mains before commencing installation and remove the appropriate circuit fuse.
- > Suitable for outdoor use.
- > Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.
- > The chosen location of your new fitting should allow for the product to be securely mounted and safely connected to the mains supply ( lighting circuit ).
- > If the location of your new fitting requires the provision of a new electrical supply, the supply must conform with the requirements of the Building Regulations.
- > This product is designed for permanent connection to fixed wiring: this should be either a suitable lighting circuit ( protected with a 5 or 6 Amp MCB or fuse ) or a fused spur ( with a 3 Amp fuse ) via a fused connection unit. We recommend that the supply incorporates a switch for ease of operation.
- > Make connections to the electrical supply in accordance with the following code:
  - Live - Brown or Red
  - Neutral - Blue or Black
  - Earth - Green and Yellow
- > This product must be connected to Earth.
- > If the external flexible cable of this luminaire is damaged it shall be exclusively replaced by repair or service agent, or similar qualified person.
- > You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out: these tests are specified in the Wiring Regulations ( BS7671 ) referred to in the Building Regulations. If in doubt, consult a qualified electrician.

## Installation:

- 1) Choose the location for your floodlight taking care to comply with the conditions listed above.
- 2) Select suitable fixings (not supplied).
- 3) Remove the nut and bolt from each end of the mounting bracket and separate from the fitting.
- 4) Mark the position of the fixing holes using the bracket as a template. Check that the hole positions are level with a spirit level.
- 5) Secure the bracket in position.
- 6) Offer the fitting up to the bracket and identify the best fixing position to illuminate the desired area. The bracket can be fixed in five positions which must be set before replacing the nuts and bolts.
- 7) Replace the nuts and bolts at each end of the bracket and tighten securely.
- 8) Make the connections to the mains supply according to the colour code above. If you are making your connection outdoors, you will need to use a watertight connection box ( not supplied ).
- 9) Restore power and switch on.

## Setting position

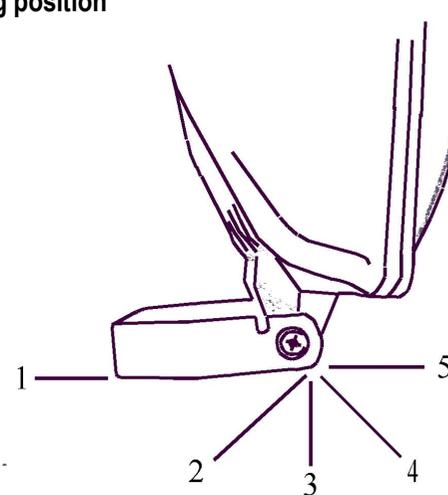

Safety markings:



IP44

