

# LM2578A/LM3578A Switching Regulator

## General Description

The LM2578A is a switching regulator which can easily be set up for such DC-to-DC voltage conversion circuits as the buck, boost, and inverting configurations. The LM2578A features a unique comparator input stage which not only has separate pins for both the inverting and non-inverting inputs, but also provides an internal 1.0V reference to each input, thereby simplifying circuit design and p.c. board layout. The output can switch up to 750mA and has output pins for its collector and emitter to provide design flexibility. An external current limit terminal may be referenced to either the ground or the  $V_{IN}$  terminal, depending upon the application. In addition, the LM2578A has an on-board oscillator, which sets the switching frequency with a single external capacitor from <math>1\text{ Hz}</math> to 100 kHz (typical).

The LM2578A is an improved version of the LM2578, offering higher maximum ratings for the total supply voltage and output transistor emitter and collector voltages.

## Features


- Inverting and non-inverting feedback inputs
- 1.0V reference at inputs
- Operates from supply voltages of 2V to 40V
- Output current up to 750mA, saturation less than 0.9V
- Current limit and thermal shut down
- Duty cycle up to 90%

## Applications

- Switching regulators in buck, boost, inverting, and single-ended transformer configurations
- Motor speed control
- Lamp flasher

## Connection Diagram and Ordering Information


Dual-In-Line Package

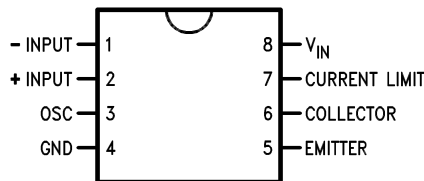

00871129

Order Number LM3578AM, LM2578AN or LM3578AN  
See NS Package Number M08A or N08E

# Functional Diagram

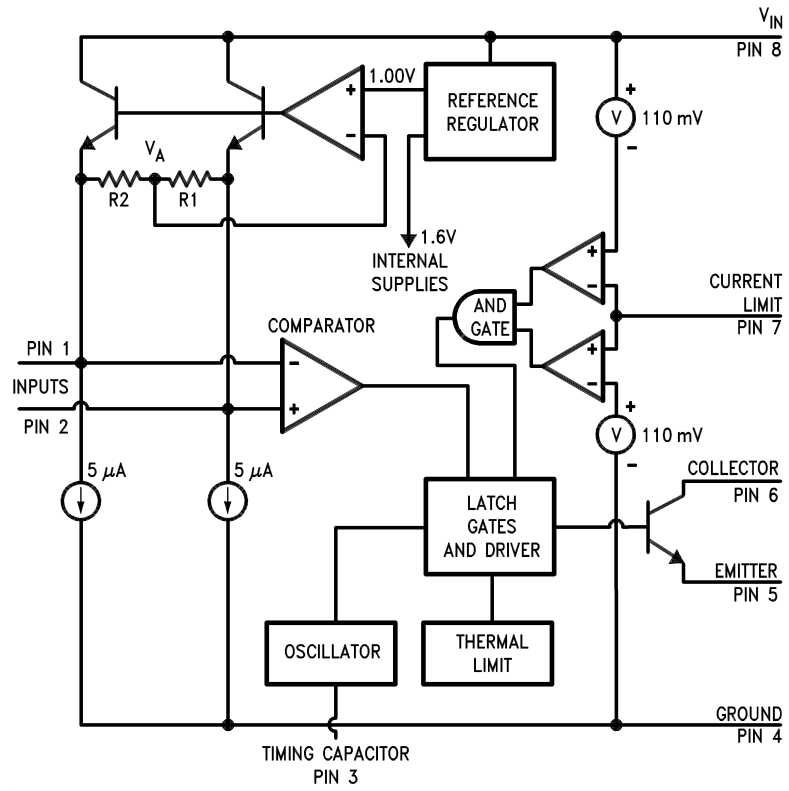

00871101

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Total Supply Voltage	50V
Collector Output to Ground	-0.3V to +50V
Emitter Output to Ground (Note 2)	-1V to +50V
Power Dissipation (Note 3)	Internally Limited
Output Current	750mA
Storage Temperature	-65°C to +150°C
Lead Temperature (soldering, 10 seconds)	260°C
Maximum Junction Temperature	150°C

ESD Tolerance (Note 4)

2 kV

**Operating Ratings**

Ambient Temperature Range

LM2578A

 $-40^{\circ}\text{C} \leq T_A$   
 $\leq +85^{\circ}\text{C}$ 

LM3578A

 $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ 

Junction Temperature Range

LM2578A

 $-40^{\circ}\text{C} \leq T_J$   
 $\leq +125^{\circ}\text{C}$ 

LM3578A

 $0^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$ **Electrical Characteristics**

These specifications apply for  $2\text{V} \leq V_{\text{IN}} \leq 40\text{V}$  ( $2.2\text{V} \leq V_{\text{IN}} \leq 40\text{V}$  for  $T_J \leq -25^{\circ}\text{C}$ ), timing capacitor  $C_T = 3900\text{ pF}$ , and  $25\% \leq$  duty cycle  $\leq 75\%$ , unless otherwise specified. Values in standard typeface are for  $T_J = 25^{\circ}\text{C}$ ; values in **boldface type** apply for operation over the specified operating junction temperature range.

Symbol	Parameter	Conditions	Typical (Note 5)	LM2578A/ LM3578A Limit (Note 6)	Units
<b>OSCILLATOR</b>					
$f_{\text{osc}}$	Frequency		20	24 16	kHz kHz (1 ax) kHz (1 ip)
$\Delta f_{\text{osc}}/\Delta T$	Frequency Drift with Temperature		-0.13		%/°C
	Amplitude		550		mV <sub>p-p</sub>
<b>REFERENCE/COMPARATOR</b> (Note 7)					
$V_R$	Input Reference Voltage	$I_1 = I_2 = 0\text{mA}$ and $I_1 = I_2 = 1\text{mA} \pm 1\%$ (Note 8)	1.0	1.050/1.070 0.950/0.930	V V (1 ax) V (1 ip)
$\Delta V_R/\Delta V_{\text{IN}}$	Input Reference Voltage Line Regulation	$I_1 = I_2 = 0\text{mA}$ and $I_1 = I_2 = 1\text{mA} \pm 1\%$ (Note 8)	0.003		%/V %/V (1 ax)
$I_{\text{INV}}$	Inverting Input Current	$I_1 = I_2 = 0\text{mA}$ , duty cycle = 25%	0.5		μA
	Level Shift Accuracy	Level Shift Current = 1mA	1.0	10/13	% % (1 ax)
$\Delta V_R/\Delta t$	Input Reference Voltage Long Term Stability		100		ppm/1000h
<b>OUTPUT</b>					
$V_C$ (sat)	Collector Saturation Voltage	$I_C = 750\text{mA}$ pulsed, Emitter grounded	0.7	0.90/1.2	V V (1 ax)
$V_E$ (sat)	Emitter Saturation Voltage	$I_O = 80\text{mA}$ pulsed, $V_{\text{IN}} = V_C = 40\text{V}$	1.4	1.7/2.0	V V (1 ax)
$I_{\text{CES}}$	Collector Leakage Current	$V_{\text{IN}} = V_{\text{CE}} = 40\text{V}$ , Emitter grounded, Output OFF	0.1	200/250	μA μA (1 ax)
$BV_{\text{CEO(SUS)}}$	Collector-Emitter Sustaining Voltage	$I_{\text{SUST}} = 0.2\text{A}$ (pulsed), $V_{\text{IN}} = 0$	60	50	V V (1 ip)
<b>CURRENT LIMIT</b>					
$V_{\text{CL}}$	Sense Voltage Shutdown Level	Referred to $V_{\text{IN}}$ or Ground (Note 9)	110	80 160	mV mV (1 ip) mV (1 ax)

## Electrical Characteristics (Continued)

These specifications apply for  $2V \leq V_{IN} \leq 40V$  ( $2.2V \leq V_{IN} \leq 40V$  for  $T_J \leq -25^\circ C$ ), timing capacitor  $C_T = 3900$  pF, and  $25\% \leq$  duty cycle  $\leq 75\%$ , unless otherwise specified. Values in standard typeface are for  $T_J = 25^\circ C$ ; values in **boldface type** apply for operation over the specified operating junction temperature range.

Symbol	Parameter	Conditions	Typical (Note 5)	LM2578A/ LM3578A Limit (Note 6)	Units
<b>CURRENT LIMIT</b>					
$\Delta V_{CL}/\Delta T$	Sense Voltage Temperature Drift		<b>0.3</b>		%/ $^\circ C$
$I_{CL}$	Sense Bias Current	Referred to $V_{IN}$	4.0		$\mu A$
		Referred to ground	0.4		$\mu A$
<b>DEVICE POWER CONSUMPTION</b>					
$I_S$	Supply Current	Output OFF, $V_E = 0V$	2.0	<b>3.5/4.0</b>	$\mu A$ $\mu A$ (max)
		Output ON, $I_C = 750$ $\mu A$ pulsed, $V_E = 0V$	14		$\mu A$

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its rated operating conditions.

**Note 2:** For  $T_J \geq 100^\circ C$ , the emitter pin voltage should not be driven more than 0.6V below ground (see Application Information).

**Note 3:** At elevated temperatures, devices must be derated based on package thermal resistance. The device in the 8-pin DIP must be derated at  $95^\circ C/W$ , junction to air ambient. The device in the surface-mount package must be derated at  $150^\circ C/W$ , junction-to-air ambient.

**Note 4:** Hysteresis and body diode, 1.5 k $\Omega$  in series with 100 pF.

**Note 5:** Typical values are for  $T_J = 25^\circ C$  and represent the most likely parameter values.

**Note 6:** All limits guaranteed at room temperature (standard typeface) and at temperature extremes (bold typeface). Room temperature limits are 100% production tested. Limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods. All limits are used to calculate AOQL.


**Note 7:** Input terminals are protected from accidental shorts to ground but if external voltages higher than the reference voltage are applied, excessive current will flow and should be limited to less than 5 mA.

**Note 8:**  $I_1$  and  $I_2$  are the external sink currents at the inputs (refer to Test Circuit).

**Note 9:** Connection of a 10 k $\Omega$  resistor from pin 1 to pin 4 will drive the duty cycle to its maximum, typically 90%. Applying the maximum current limit sense voltage to pin 7 will not reduce the duty cycle to less than 50%. Applying the maximum current limit sense voltage to pin 7 is certain to reduce the duty cycle below 50%. Increasing this voltage by 15 mV may be required to reduce the duty cycle to 0%, when the Collector output swing is 40V or greater (see Ground-Referred Current Limit Sense Voltage typical curve).


## Typical Performance Characteristics

Oscillator Frequency Change  
with Temperature

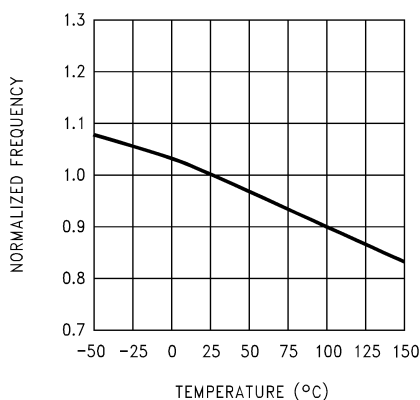

00871132


Oscillator Voltage Swing

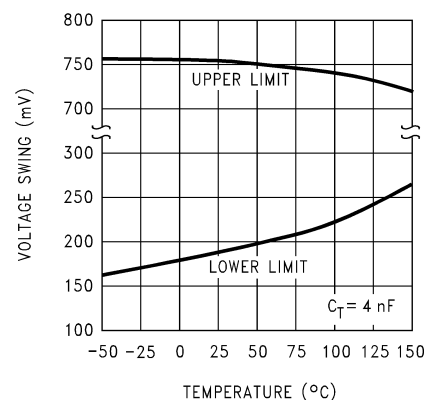

00871133


# Typical Performance Characteristics (Continued)

**Input Reference Voltage Drift with Temperature**

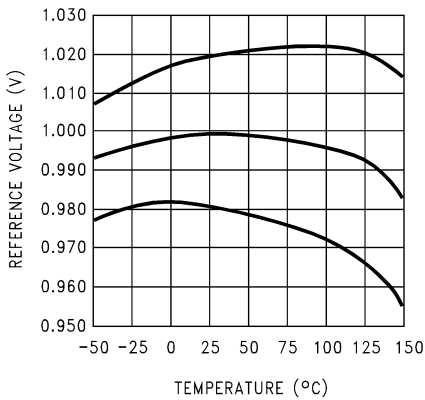


00871134

**Collector Saturation Voltage (Sinking Current, Emitter Grounded)**

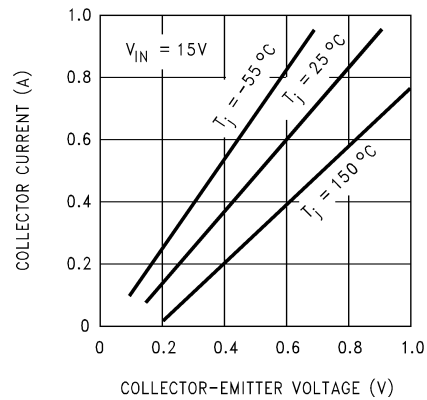


00871135

**Emitter Saturation Voltage (Sourcing Current, Collector at VIN)**

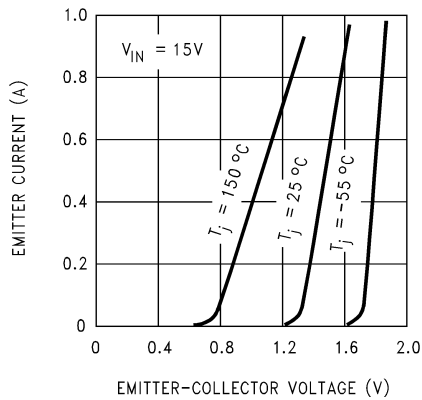


00871136

**Ground Referred Current Limit Sense Voltage**

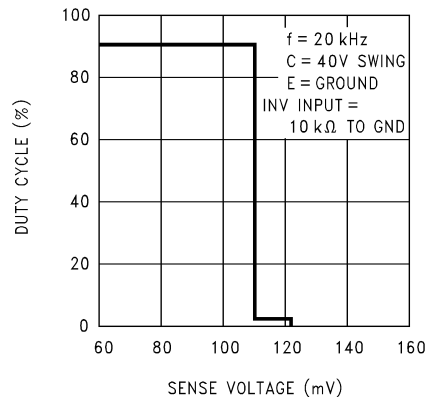


00871137

**Current Limit Sense Voltage Drift with Temperature**

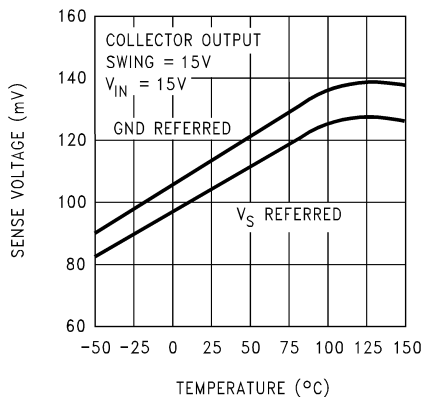

00871138


**Current Limit Response Time for Various Over Drives**

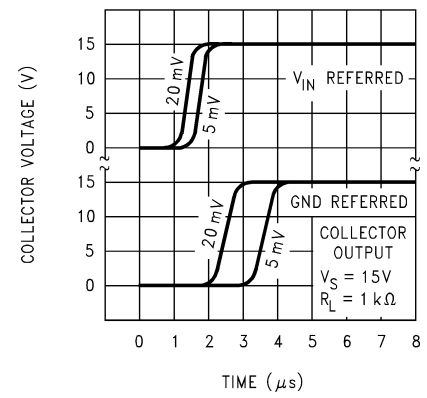

00871139


Typical Performance Characteristics (Continued)

Current Limit Sense Voltage vs Supply Voltage

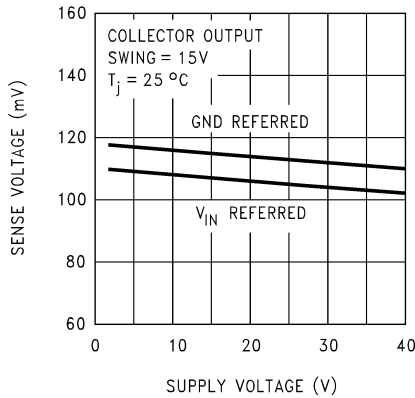


00871140

Supply Current

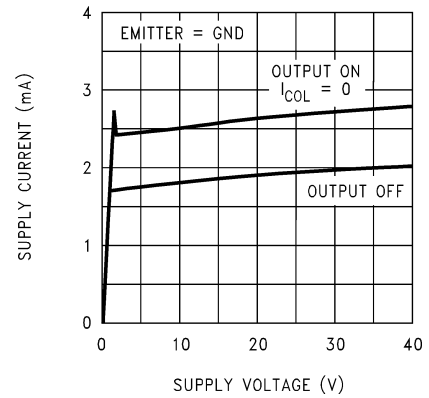


00871141

Supply Current

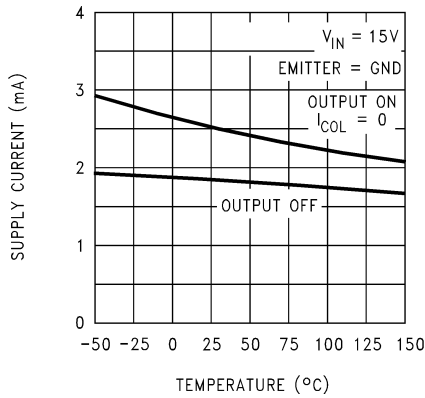

00871142

Collector Current with Emitter Output Below Ground

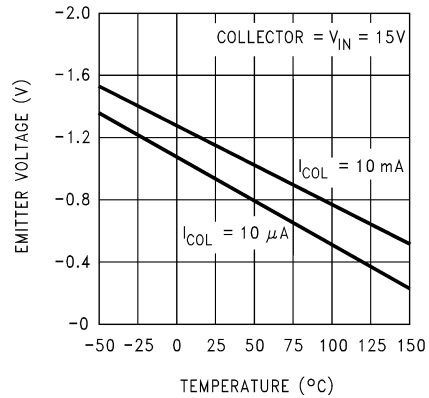

00871143

Test Circuit\*

Parameter tests can be made using the test circuit shown. Select the desired  $V_{in}$ , collector voltage and duty cycle with adjustable power supplies. A digital voltmeter with an input resistance greater than 100 MΩ should be used to measure the following:

Input Reference Voltage to Ground; S1 in either position.  
 Level Shift Accuracy (%) =  $(T_{P3}(V)/1V) \times 100\%$ ; S1 at  $I_1 = I_2 = 1\text{ A}$

Input Current (A) =  $(1V - T_{P3}(V))/1\text{ M}\Omega$ ; S1 at  $I_1 = I_2 = 0\text{ A}$ .


Oscillator parameters can be measured at  $T_{P4}$  using a frequency counter or an oscilloscope.

The Current Limit Sense Voltage is measured by connecting an adjustable 0-to-1V floating power supply in series with the current limit terminal and referring it to either the ground or the  $V_{in}$  terminal. Set the duty cycle to 90% and monitor test point  $T_{P5}$  while adjusting the floating power supply voltage until the LM2578A's duty cycle just reaches 0%. This voltage is the Current Limit Sense Voltage.

The Supply Current should be measured with the duty cycle at 0% and S1 in the  $I_1 = I_2 = 0\text{ A}$  position.

\*LM2578A specifications are measured using automated test equipment. This circuit is provided for the customer's convenience when checking parameters. Due to possible variations in testing conditions, the measured values from these testing procedures may not match those of the factory.

## Test Circuit\* (Continued)

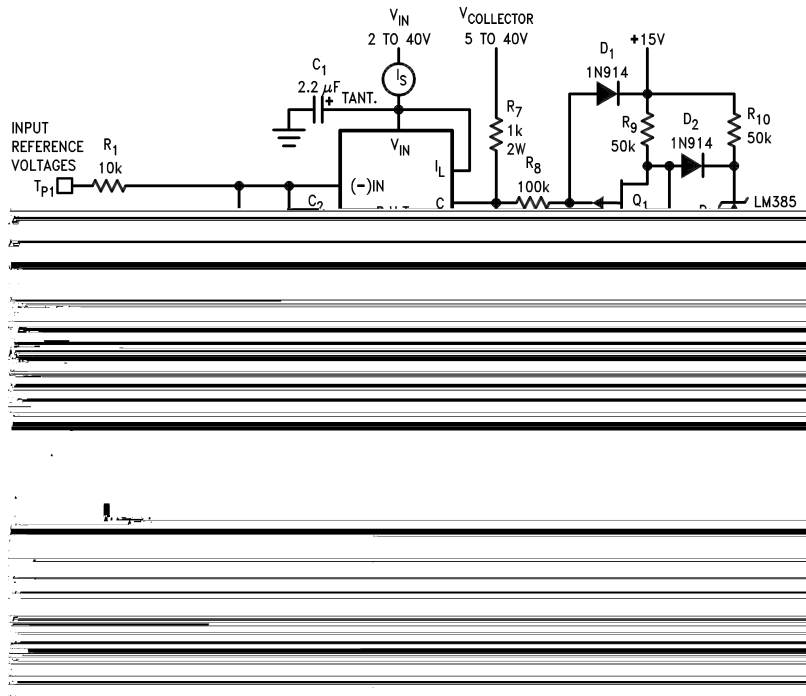

00871103

Open supply rails are  $\pm 15V$   
 DVM input resistance  $> 100 M\Omega$   
 \*LM2578A max duty cycle is 90%

## Definition of Terms

**Input Reference Voltage:** The voltage (referred to ground) that must be applied to either the inverting or non-inverting input to cause the regulator switch to change state (ON or OFF).

**Input Reference Current:** The current that must be drawn from either the inverting or non-inverting input to cause the regulator switch to change state (ON or OFF).

**Input Level Shift Accuracy:** This specification determines the output voltage tolerance of a regulator whose output control depends on drawing equal currents from the inverting and non-inverting inputs (see the Inverting Regulator of Figure 21, and the RS-232 Line Driver Power Supply of Figure 23).

Level Shift Accuracy is tested by using two equal-value resistors to draw current from the inverting and non-inverting input terminals. When measuring the percentage difference in the voltages across the resistors that produces a controlled duty cycle at the switch output.

**Collector Saturation Voltage:** With the inverting input terminal grounded thru a 10 k $\Omega$  resistor and the output transistor's emitter connected to ground, the Collector Saturation Voltage is the collector-to-emitter voltage for a given collector current.

**Emitter Saturation Voltage:** With the inverting input terminal grounded thru a 10 k $\Omega$  resistor and the output transistor's collector connected to  $V_{in}$ , the Emitter Saturation Voltage is the collector-to-emitter voltage for a given emitter current.

**Collector Emitter Sustaining Voltage:** The collector-emitter breakdown voltage of the output transistor, measured at a specified current.

**Current Limit Sense Voltage:** The voltage at the Current Limit pin, referred to either the supply or the ground terminal, which (via logic circuitry) will cause the output transistor to turn OFF and resets cycle-by-cycle at the oscillator frequency.

**Current Limit Sense Current:** The bias current for the Current Limit terminal with the applied voltage equal to the Current Limit Sense Voltage.

**Supply Current:** The IC power supply current, excluding the current drawn through the output transistor, with the oscillator operating.

## Functional Description

The LM2578A is a pulse-width modulator designed for use as a switching regulator controller. It may also be used in other applications which require controlled pulse-width voltage drive.

A control signal, usually representing output voltage, fed into the LM2578A's comparator is compared with an internally-generated reference. The resulting error signal and the oscillator's output are fed to a logic network which determines when the output transistor will be turned ON or OFF. The following is a brief description of the subsections of the LM2578A.

### COMPARATOR INPUT STAGE

The LM2578A's comparator input stage is unique in that both the inverting and non-inverting inputs are available to the user, and both contain a 1.0V reference. This is accomplished as follows: A 1.0V reference is fed into a modified voltage follower circuit (see FUNCTIONAL DIAGRAM). When both input pins are open, no current flows through R1

## Functional Description (Continued)

and R2. Thus, both inputs to the comparator will have the potential of the 1.0V reference,  $V_A$ . When one input, for example the non-inverting input, is pulled  $\Delta V$  away from  $V_A$ , a current of  $\Delta V/R1$  will flow through R1. This same current flows through R2, and the comparator sees a total voltage of  $2\Delta V$  between its inputs. The high gain of the system, through feedback, will correct for this imbalance and return both inputs to the 1.0V level.

This unusual comparator input stage increases circuit flexibility, while minimizing the total number of external components required for a voltage regulator system. The inverting switching regulator configuration, for example, can be set up without having to use an external op amp for feedback polarity reversal (see TYPICAL APPLICATIONS).

### OSCILLATOR

The LM2578A provides an on-board oscillator which can be adjusted up to 100 kHz. Its frequency is set by a single external capacitor,  $C_1$ , as shown in Figure 1, and follows the equation

$$f_{OSC} = 8 \times 10^{-5} / C_1$$

The oscillator provides a blanking pulse to limit its axial duty cycle to 90%, and a reset pulse to the internal circuitry.

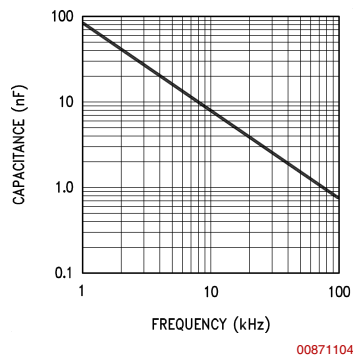


FIGURE 1. Value of Timing Capacitor vs Oscillator Frequency

### OUTPUT TRANSISTOR

The output transistor is capable of delivering up to 750mA with a saturation voltage of less than 0.9V. (see Collector Saturation Voltage and Emitter Saturation Voltage curves).

The emitter must not be pulled more than 1V below ground (this limit is 0.6V for  $T_J \geq 100^\circ\text{C}$ ). Because of this limit, an external transistor may be used to develop negative output voltages (see the Inverting Regulator Typical Application). Other configurations may need protection against violation of this limit (see the Emitter Output section of the Applications Information).

### CURRENT LIMIT

The LM2578A's current limit may be referenced to either the ground or the  $V_{IP}$  pins, and operates on a cycle-by-cycle basis.


The current limit section consists of two comparators: one with its non-inverting input referenced to a voltage 110mV below  $V_{IP}$ , the other with its inverting input referenced

110mV above ground (see FUNCTIONAL DIAGRAM). The current limit is activated whenever the current limit terminal is pulled 110mV away from either  $V_{IP}$  or ground.

## Applications Information


### CURRENT LIMIT

As mentioned in the functional description, the current limit terminal may be referenced to either the  $V_{IP}$  or the ground terminal. Resistor R3 converts the current to be sensed into a voltage for current limit detection.

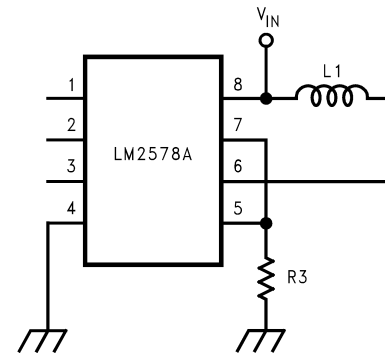

00871115

FIGURE 2. Current Limit, Ground Referred

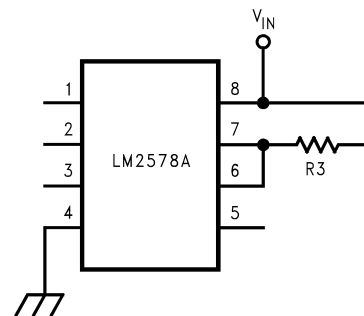

00871116

FIGURE 3. Current Limit,  $V_{IN}$  Referred


### CURRENT LIMIT TRANSIENT SUPPRESSION

When noise spikes and switching transients interfere with proper current limit operation, R1 and C1 act together as a low pass filter to control the current limit circuitry's response time.

Because the sense current of the current limit terminal varies according to where it is referenced, R1 should be less than 2 k $\Omega$  when referenced to ground, and less than 100 $\Omega$  when referenced to  $V_{IP}$ .




**Applications Information** (Continued)

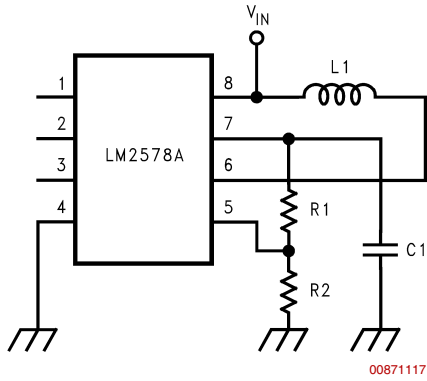

00871117

**FIGURE 4. Current Limit Transient Suppressor, Ground Referred**

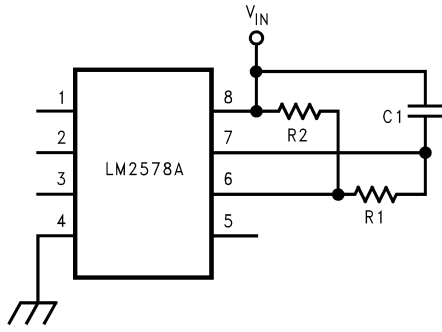


00871118

**FIGURE 5. Current Limit Transient Suppressor, VIN Referred**


**C.L. SENSE VOLTAGE MULTIPLICATION**

When a larger sense resistor value is desired, the voltage divider network, consisting of R1 and R2, may be used. This effectively multiplies the sense voltage by  $(1 + R1/R2)$ . Also, R1 can be replaced by a diode to increase current limit sense voltage to about 800 mV (diode  $V_f + 110$  mV).

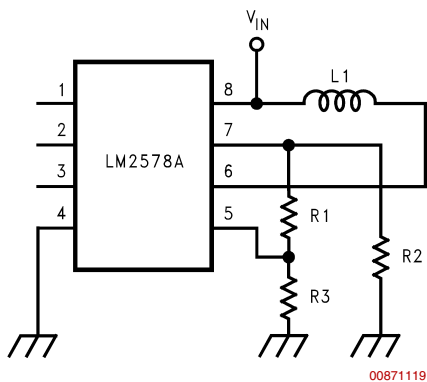

00871119

**FIGURE 6. Current Limit Sense Voltage Multiplication, Ground Referred**

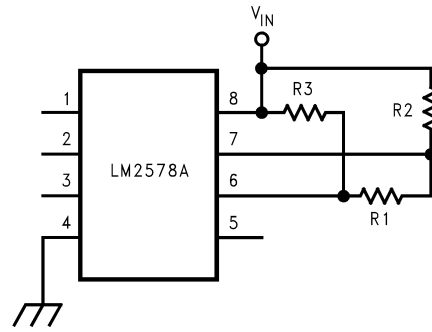


00871120

**FIGURE 7. Current Limit Sense Voltage Multiplication, VIN Referred**

**UNDER-VOLTAGE LOCKOUT**

Under-voltage lockout is accomplished with few external components. When  $V_{in}$  becomes lower than the zero-breakdown voltage, the output transistor is turned off. This occurs because diode D1 will then become forward biased, allowing resistor R3 to sink a greater current from the non-inverting input than is sunk by the parallel combination of R1 and R2 at the inverting terminal. R3 should be one-fifth the value of R1 and R2 in parallel.

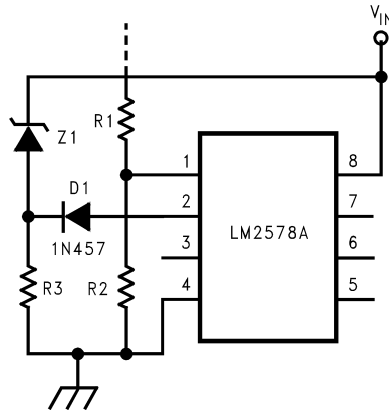


00871122

**FIGURE 8. Under-Voltage Lockout**

**MAXIMUM DUTY CYCLE LIMITING**

The maximum duty cycle can be externally limited by adjusting the charge to discharge ratio of the oscillator capacitor with a single external resistor. Typical values are 50  $\mu$ A for the charge current, 450  $\mu$ A for the discharge current, and a voltage swing from 200 mV to 750 mV. Therefore, R1 is selected for the desired charging and discharging slopes and C1 is readjusted to set the oscillator frequency.

## Applications Information (Continued)

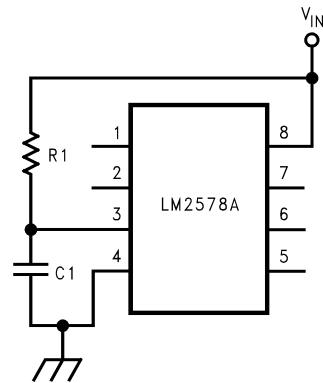

00871121


FIGURE 9. Maximum Duty Cycle Limiting

### DUTY CYCLE ADJUSTMENT

When a physical or electrical selection of the output transistor's duty cycle is needed, the circuit shown below may be used. The output will turn on with the beginning of each oscillator cycle and turn off when the current sunk by R2 and R3 from the non-inverting terminal becomes greater than the current sunk from the inverting terminal.

With the resistor values as shown, R3 can be used to adjust the duty cycle from 0% to 90%.

When the sum of R2 and R3 is twice the value of R1, the duty cycle will be about 50%. C1 may be a large electrolytic capacitor to lower the oscillator frequency below 1 Hz.

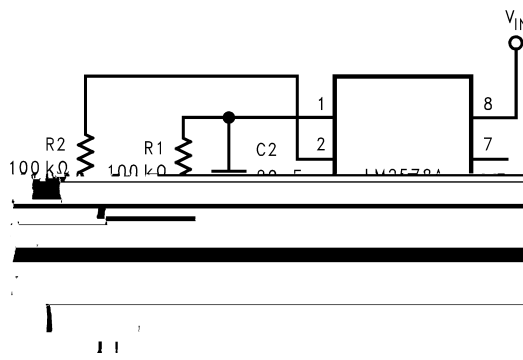

00871123

FIGURE 10. Duty Cycle Adjustment

### REMOTE SHUTDOWN

The LM2578A may be remotely shutdown by sinking a greater current from the non-inverting input than from the inverting input. This may be accomplished by selecting resistor R3 to be approximately one-half the value of R1 and R2 in parallel.




00871124

FIGURE 11. Shutdown Occurs when  $V_L$  is High

### EMITTER OUTPUT

When the LM2578A output transistor is in the OFF state, if the emitter output swings below the ground pin voltage, the output transistor will turn ON because its base is clamped near ground. The *Collector Current with Emitter Output Below Ground* curve shows the amount of Collector current drawn in this mode, vs temperature and emitter voltage. When the Collector-Emitter voltage is high, this current will cause high power dissipation in the output transistor and should be avoided.

This situation can occur in the high-current high-voltage buck application if the emitter output is used and the catch diode's forward voltage drop is greater than 0.6V. A fast-recovery diode can be added in series with the emitter output to counter the forward voltage drop of the catch diode (see Figure 2). For better efficiency of a high output current buck regulator, an external PNP transistor should be used as shown in Figure 16.

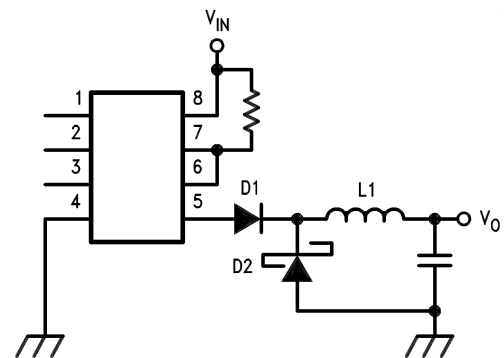

00871130

FIGURE 12. D1 Prevents Output Transistor from Improperly Turning ON due to D2's Forward Voltage

### SYNCHRONIZING DEVICES

When several devices are to be operated at once, their oscillators may be synchronized by the application of an external signal. This drive signal should be a pulse waveform with a minimum pulse width of 2  $\mu$ s. and a amplitude from

## Applications Information (Continued)

1.5V to 2.0V. The signal source must be capable of 1.) driving capacitive loads and 2.) delivering up to 500  $\mu$ A for each LM2578A.

Capacitors C1 thru CN are to be selected for a 20% slower frequency than the synchronization frequency.

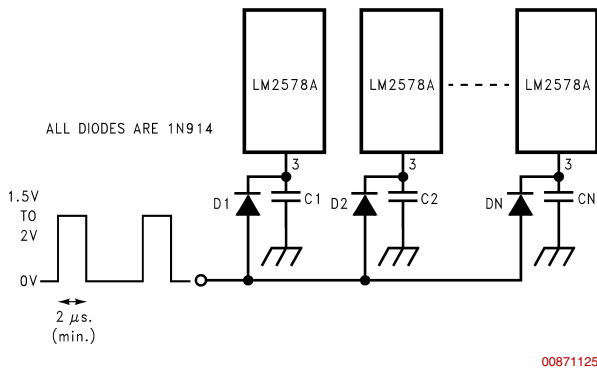


FIGURE 13. Synchronizing Devices

## Typical Applications

The LM2578A may be operated in either the continuous or the discontinuous conduction mode. The following applications (except for the Buck-Boost Regulator) are designed for continuous conduction operation. That is, the inductor current is not allowed to fall to zero. This mode of operation has higher efficiency and lower EMI characteristics than the discontinuous mode.

### BUCK REGULATOR

The buck configuration is used to step an input voltage down to a lower level. Transistor Q1 in Figure 14 chops the input DC voltage into a squarewave. This squarewave is then converted back into a DC voltage of lower magnitude by the low pass filter consisting of L1 and C1. The duty cycle, D, of the squarewave relates the output voltage to the input voltage by the following equation:

$$V_{out} = D \times V_{in} = V_{in} \times (t_{on}) / (t_{on} + t_{off})$$

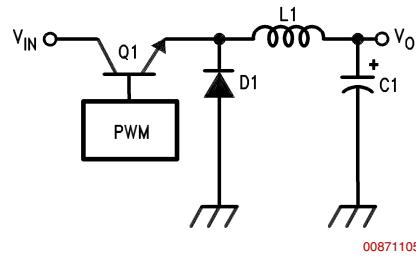


FIGURE 14. Basic Buck Regulator

Figure 15 is a 15V to 5V buck regulator with an output current,  $I_o$ , of 350mA. The circuit becomes discontinuous at 20% of  $I_{o(max)}$ , has 10mV of output voltage ripple, an efficiency of 75%, a load regulation of 30mV (70mA to 350mA) and a line regulation of 10mV ( $12 \leq V_{in} \leq 18V$ ).

Component values are selected as follows:

$$R1 = (V_o - 1) \times R2 \text{ where } R2 = 10 \text{ k}\Omega$$

$$R3 = V / I_{sw(max)}$$

$$R3 = 0.15\Omega$$

where:

V is the current limit sense voltage, 0.11V

$I_{sw(max)}$  is the maximum allowable current thru the output transistor.

L1 is the inductor and may be found from the inductance calculation chart (Figure 16) as follows:

$$\text{Given } V_{in} = 15V$$

$$V_o = 5V$$


$$I_{o(max)} = 350mA$$

$$f_{OSC} = 50 \text{ kHz}$$

Discontinuous at 20% of  $I_{o(max)}$ .

Note that since the circuit will become discontinuous at 20% of  $I_{o(max)}$ , the load current must not be allowed to fall below 70mA.

## Typical Applications (Continued)

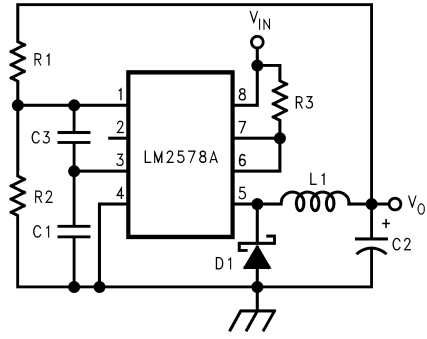

00871106

$V_{iP} = 15V$	$R3 = 0.15\Omega$
$V_o = 5V$	$C1 = 1820\text{ pF}$
$V_{\text{ripple}} = 10\text{-}\gamma\text{ V}$	$C2 = 220\text{ }\mu\text{F}$
$I_o = 350\text{-}\gamma\text{ A}$	$C3 = 20\text{ pF}$
$f_{\text{osc}} = 50\text{ kHz}$	$L1 = 470\text{ }\mu\text{H}$
$R1 = 40\text{ k}\Omega$	$D1 = 1N5818$
$R2 = 10\text{ k}\Omega$	


**FIGURE 15. Buck or Step-Down Regulator**

# Typical Applications (Continued)

HOW TO USE THIS CHART

- ① CALCULATE  $I_L$ , MAX DC HERE
- ② CALCULATE  $E_{-TOP}$  HERE
- ③ ENTER REQUIRED % DISCONTINUITY  $\Delta I_L \cdot 100\%$  =  $2I_L$ , MAX DC HERE IF "20%" PROCEED TO ⑦
- ④ PROCEED HORIZONTALLY TO  $I_L$ , MAX DC FROM ①
- ⑤ FROM  $I_L$ , MAX DC PROCEED VERTICALLY

BUCK	BOOST	INVERT	
$I_L = I_{LOAD}$	$I_L = I_{LOAD} \frac{V_O}{V_{IN}}$	$I_L = I_{LOAD} \cdot \frac{V_{IN} +  V_O }{V_{IN}}$	$I_L$
$(V_{IN} - V_O) \cdot \frac{V_O}{V_{IN}} \cdot \frac{1000}{F, kHz}$	$(V_O - V_{IN}) \cdot \frac{V_{IN}}{V_O} \cdot \frac{1000}{F, kHz}$	$V_{IN} \cdot \frac{ V_O }{V_{IN} +  V_O } \cdot \frac{1000}{F, kHz}$	$E_{-TOP}$

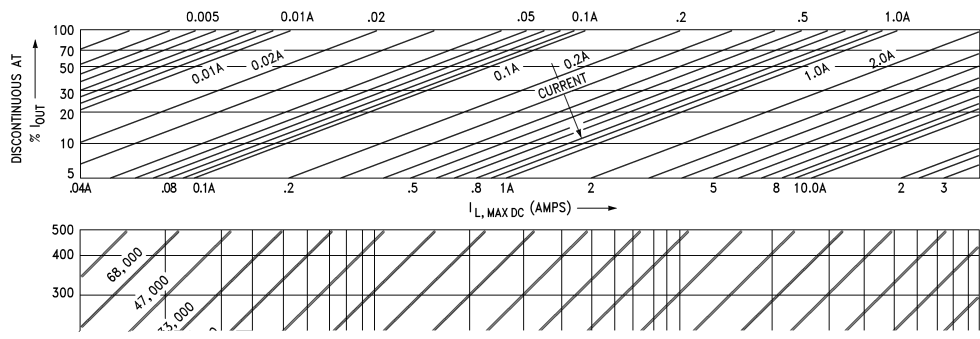

00871131

FIGURE 16. DC/DC Inductance Calculator

## Typical Applications (Continued)

**Step 1:** Calculate the average DC current through the inductor,  $I_{L(\text{ax, DC})}$ . The necessary equations are indicated at the top of the chart and show that  $I_{L(\text{ax, DC})} = I_{O(\text{ax, DC})}$  for the buck configuration. Thus,  $I_{L(\text{ax, DC})} = 350\text{ mA}$ .

**Step 2:** Calculate the inductor Volts-sec product,  $E-T_{\text{op}}$ , according to the equations given from the chart. For the Buck:

$$\begin{aligned} E-T_{\text{op}} &= (V_{\text{ip}} - V_o) (V_o/V_{\text{ip}}) (1000/f_{\text{osc}}) \\ &= (15 - 5) (5/15) (1000/50) \\ &= 66\text{V}\cdot\mu\text{s}. \end{aligned}$$

with the oscillator frequency,  $f_{\text{osc}}$ , expressed in kHz.

**Step 3:** Using the graph with axis labeled "Discontinuous At %  $I_{\text{OUT}}$ " and " $I_{L(\text{ax, DC})}$ " find the point where the desired average inductor current,  $I_{L(\text{ax, DC})}$  intersects the desired discontinuity percentage.

In this example, the point of interest is where the 0.35A line intersects with the 20% line. This is nearly the midpoint of the horizontal axis.

**Step 4:** This last step is merely the translation of the point found in Step 3 to the graph directly below it. This is accomplished by moving straight down the page to the point which intersects the desired  $E-T_{\text{op}}$ . For this example,  $E-T_{\text{op}}$  is  $66\text{V}\cdot\mu\text{s}$  and the desired inductor value is  $470\text{ }\mu\text{H}$ . Since this example was for 20% discontinuity, the bottom chart could have been used directly, as noted in step 3 of the chart instructions.

For a full line of standard inductor values, contact Pulse Engineering (San Diego, Calif.) regarding their PE526XX series, or A. I. E. Magnetics (Nashville, Tenn.).

Any more precise inductance value may be calculated for the Buck, Boost and Inverting Regulators as follows:

### BUCK

$$L = V_o (V_{\text{ip}} - V_o) / (\Delta I_L V_{\text{ip}} f_{\text{osc}})$$

### BOOST

$$L = V_{\text{ip}} (V_o - V_{\text{ip}}) / (\Delta I_L f_{\text{osc}} V_o)$$

### INVERT

$$L = V_{\text{ip}} |V_o| / [\Delta I_L (V_{\text{ip}} + |V_o|) f_{\text{osc}}]$$

where  $\Delta I_L$  is the current ripple through the inductor.  $\Delta I_L$  is usually chosen based on the average load current expected of the circuit. For the buck regulator, since the inductor current  $I_L$  equals the load current  $I_o$ ,

$$\Delta I_L = 2 \cdot I_{O(\text{ax, ip})}$$

$\Delta I_L = 140\text{ mA}$  for this circuit.  $\Delta I_L$  can also be interpreted as

$$\Delta I_L = 2 \cdot (\text{Discontinuity Factor}) \cdot I_L$$

where the Discontinuity Factor is the ratio of the average load current to the average inductor current. For this example, the Discontinuity Factor is 0.2.

The resistor order of the component values of Figure 15 are chosen as follows:

C1 is the timing capacitor found in Figure 1.

$$C2 \geq V_o (V_{\text{ip}} - V_o) / (8f_{\text{osc}}^2 V_{\text{ip}} V_{\text{ripple}} L1)$$

where  $V_{\text{ripple}}$  is the peak-to-peak output voltage ripple.

C3 is necessary for continuous operation and is generally in the 10 pF to 30 pF range.

D1 should be a Schottky type diode, such as the 1N5818 or 1N5819.

## BUCK WITH BOOSTED OUTPUT CURRENT

For applications requiring a large output current, an external transistor may be used as shown in Figure 17. This circuit steps a 15V supply down to 5V with 1.5A of output current. The output ripple is 50 mV, with an efficiency of 80%, a load regulation of 40 mV (150 mA to 1.5A), and a line regulation of 20 mV ( $12\text{V} \leq V_{\text{ip}} \leq 18\text{V}$ ).

Component values are selected as outlined for the buck regulator with a discontinuity factor of 10%, with the addition of R4 and R5:

$$R4 = 10V_{\text{BE1}} B_f / I_p$$

$$R5 = (V_{\text{ip}} - V - V_{\text{BE1}} - V_{\text{sat}}) B_f / (I_{L(\text{ax, DC})} + I_{R4})$$

where:

$V_{\text{BE1}}$  is the  $V_{\text{BE}}$  of transistor Q1.

$V_{\text{sat}}$  is the saturation voltage of the LM2578A output transistor.


$V$  is the current limit sense voltage.

$B_f$  is the forced current gain of transistor Q1 ( $B_f = 30$  for Figure 17).

$$I_{R4} = V_{\text{BE1}} / R4$$

$$I_p = I_{L(\text{ax, DC})} + 0.5\Delta I_L$$

Typical Applications (Continued)

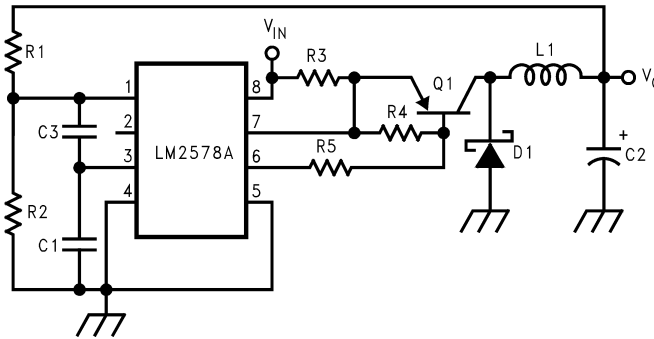

00871108


$V_{iP} = 15V$	$R4 = 200\Omega$	$f_{osc} = 50\text{ kHz}$	$C3 = 20\text{ pF}$
$V_o = 5V$	$R5 = 330\Omega$	$R1 = 40\text{ k}\Omega$	$L1 = 220\text{ }\mu\text{H}$
$V_{ripple} = 50\text{-}\gamma\text{ V}$	$C1 = 1820\text{ pF}$	$R2 = 10\text{ k}\Omega$	$D1 = 1N5819$
$I_o = 1.5A$	$C2 = 330\text{ }\mu\text{F}$	$R3 = 0.05\Omega$	$Q1 = D45$

FIGURE 17. Buck Converter with Boosted Output Current

BOOST REGULATOR

The boost regulator converts a low input voltage into a higher output voltage. The basic configuration is shown in Figure 18. Energy is stored in the inductor while the transistor is on and then transferred with the input voltage to the output capacitor for filtering when the transistor is off. Thus,


$$V_o = V_{iP} + V_{iP}(t_{on}/t_{off}).$$

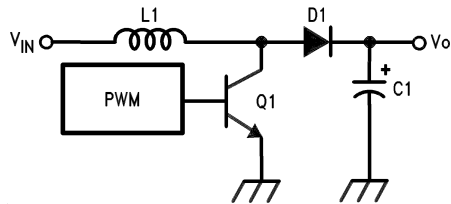

00871109

FIGURE 18. Basic Boost Regulator

The circuit of Figure 19 converts a 5V supply into a 15V supply with 150mA of output current, a load regulation of 14% (30mA to 140mA), and a line regulation of 35% (4.5V ≤  $V_{iP}$  ≤ 8.5V).

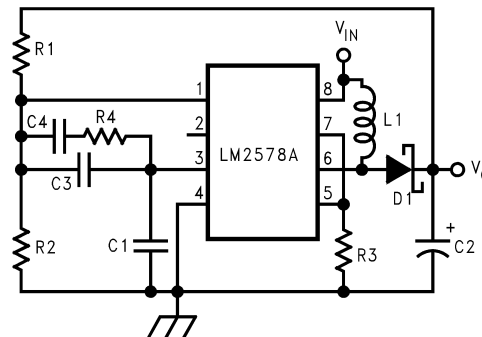

00871111

$V_{iP} = 5V$	$R4 = 200\text{ k}\Omega$
$V_o = 15V$	$C1 = 1820\text{ pF}$
$V_{ripple} = 10\text{-}\gamma\text{ V}$	$C2 = 470\text{ }\mu\text{F}$
$I_o = 140\text{-}\gamma\text{ A}$	$C3 = 20\text{ pF}$
$f_{osc} = 50\text{ kHz}$	$C4 = 0.0022\text{ }\mu\text{F}$
$R1 = 140\text{ k}\Omega$	$L1 = 330\text{ }\mu\text{H}$
$R2 = 10\text{ k}\Omega$	$D1 = 1N5818$
$R3 = 0.15\Omega$	

FIGURE 19. Boost or Step-Up Regulator

$$R1 = (V_o - 1) R2 \text{ where } R2 = 10\text{ k}\Omega.$$

$$R3 = V/(I_{L(\text{ax, DC})} + 0.5 \Delta I_L)$$

where:

$$\Delta I_L = 2(I_{LOAD(\text{max } iP)})(V_o/V_{iP})$$

$\Delta I_L$  is 200mA in this example.

R4, C3 and C4 are necessary for continuous operation and are typically 220 kΩ, 20 pF, and 0.0022 μF respectively.

C1 is the timing capacitor found in Figure 1.


$$C2 \geq I_o (V_o - V_{iP})/(f_{osc} V_o V_{ripple}).$$

## Typical Applications (Continued)

D1 is a Schottky type diode such as a 1N5818 or 1N5819.  
L1 is found as described in the buck converter section, using the inductance chart for Figure 16 for the boost configuration and 20% discontinuity.


### INVERTING REGULATOR

Figure 20 shows the basic configuration for an inverting regulator. The input voltage is of a positive polarity, but the output is negative. The output may be less than, equal to, or greater in magnitude than the input. The relationship between the magnitude of the input voltage and the output voltage is  $V_o = V_{ip} \times (t_{on}/t_{off})$ .

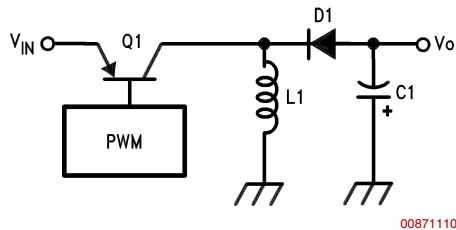

00871110

FIGURE 20. Basic Inverting Regulator

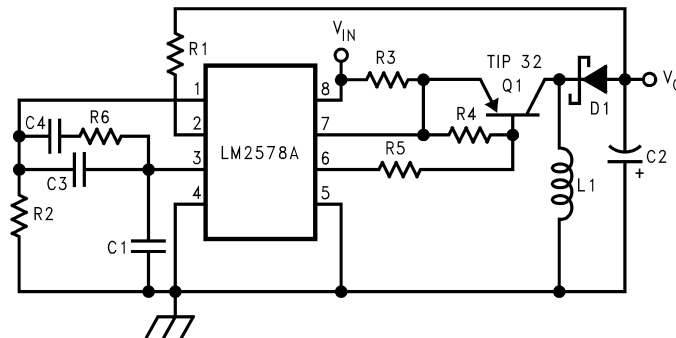

00871112

$V_{ip} = 5V$	$R4 = 190\Omega$	$f_{osc} = 50 \text{ kHz}$	$C3 = 20 \text{ pF}$
$V_o = -15V$	$R5 = 82\Omega$	$R1 = 160 \text{ k}\Omega$	$C4 = 0.0022 \mu\text{F}$
$V_{ripple} = 5\text{-}\gamma \text{ V}$	$R6 = 220 \text{ k}\Omega$	$R2 = 10 \text{ k}\Omega$	$L1 = 150 \mu\text{H}$
$I_o = 300\text{-}\gamma \text{ A}$	$C1 = 1820 \text{ pF}$	$R3 = 0.01\Omega$	$D1 = 1N5818$
$I_{ip} = 60\text{-}\gamma \text{ A}$	$C2 = 1000 \mu\text{F}$		

FIGURE 21. Inverting Regulator

### BUCK-BOOST REGULATOR

The Buck-Boost Regulator, shown in Figure 22, may step a voltage up or down, depending upon whether or not the desired output voltage is greater or less than the input voltage. In this case, the output voltage is 12V with an input voltage from 9V to 15V. The circuit exhibits an efficiency of 75%, with a load regulation of 60% (10A to 100A) and a line regulation of 52%.

$$R1 = (V_o - 1) R2 \text{ where } R2 = 10 \text{ k}\Omega$$

$$R3 = V_o / 0.75A$$

R4, C1, C3 and C4 are defined in the "Boost Regulator" section.

Figure 21 shows a LM2578A configured as a 5V to -15V polarity inverter with an output current of 300mA, a load regulation of 44% (60A to 300A) and a line regulation of 50% ( $4.5V \leq V_{ip} \leq 8.5V$ ).

$$R1 = (|V_o| + 1) R2 \text{ where } R2 = 10 \text{ k}\Omega.$$

$$R3 = V_o / (I_{L_{ax, DC}} + 0.5 \Delta I_L).$$

$$R4 = 10V_{BE1} B_f / (I_{L_{ax, DC}} + 0.5 \Delta I_L)$$

where:

$V_o$ ,  $V_{BE1}$ ,  $V_{sat}$ , and  $B_f$  are defined in the "Buck Converter with Boosted Output Current" section.

$$\Delta I_L = 2(I_{LOAD_{ip}})(V_{ip} + |V_o|) / V_{IN}$$

R5 is defined in the "Buck with Boosted Output Current" section.

R6 serves the same purpose as R4 in the Boost Regulator circuit and is typically 220kΩ.

C1, C3 and C4 are defined in the "Boost Regulator" section.

$$C2 \geq I_o |V_o| / [f_{osc} (|V_o| + V_{ip}) V_{ripple}]$$

L1 is found as outlined in the section on buck converters, using the inductance chart of Figure 16 for the invert configuration and 20% discontinuity.

D1 and D2 are Schottky type diodes such as the 1N5818 or 1N5819.

$$C2 \geq \frac{(I_o / V_{ripple}) (V_o + 2V_d)}{[f_{osc} (V_{in} + V_o + 2V_d - V_{sat} - V_{sat1})]}$$

where:

$V_d$  is the forward voltage drop of the diodes.

$V_{sat}$  is the saturation voltage of the LM2578A output transistor.

$V_{sat1}$  is the saturation voltage of transistor Q1.

$$L1 \geq (V_{ip} - V_{sat} - V_{sat1}) (t_{on} / I_p)$$





## Typical Applications (Continued)


A rough value for an ideal output capacitor  $C_3$ , could be calculated as  $C = I_o \times t / \Delta V$  where  $I_o$  is the load current,  $t$  is the transistor on time (typically  $0.4/f_{osc}$ ), and  $\Delta V$  is the peak-to-peak output voltage ripple. A larger output capacitor than this theoretical value should be used since electrolytics have poor high frequency performance. Experience has shown that a value from 5 to 10 times the calculated value should be used.

For good efficiency, the diodes must have a low forward voltage drop and be fast switching. 1N5819 Schottky diodes work well.

Transformer selection should be picked for an output transistor "on" time of  $0.4/f_{osc}$ , and a primary inductance high enough to prevent the output transistor switch from ringing higher than the transistor's rating of 750 mA. Pulse Engineering (San Diego, Calif.) and Repco Electronics, Inc. (Deer Park, N.Y.) can provide further assistance in selecting the proper transformer for a specific application need. The transformer used in Figure 23 was a Pulse Engineering PE-64287.


**Physical Dimensions** inches (millimeters)

unless otherwise noted

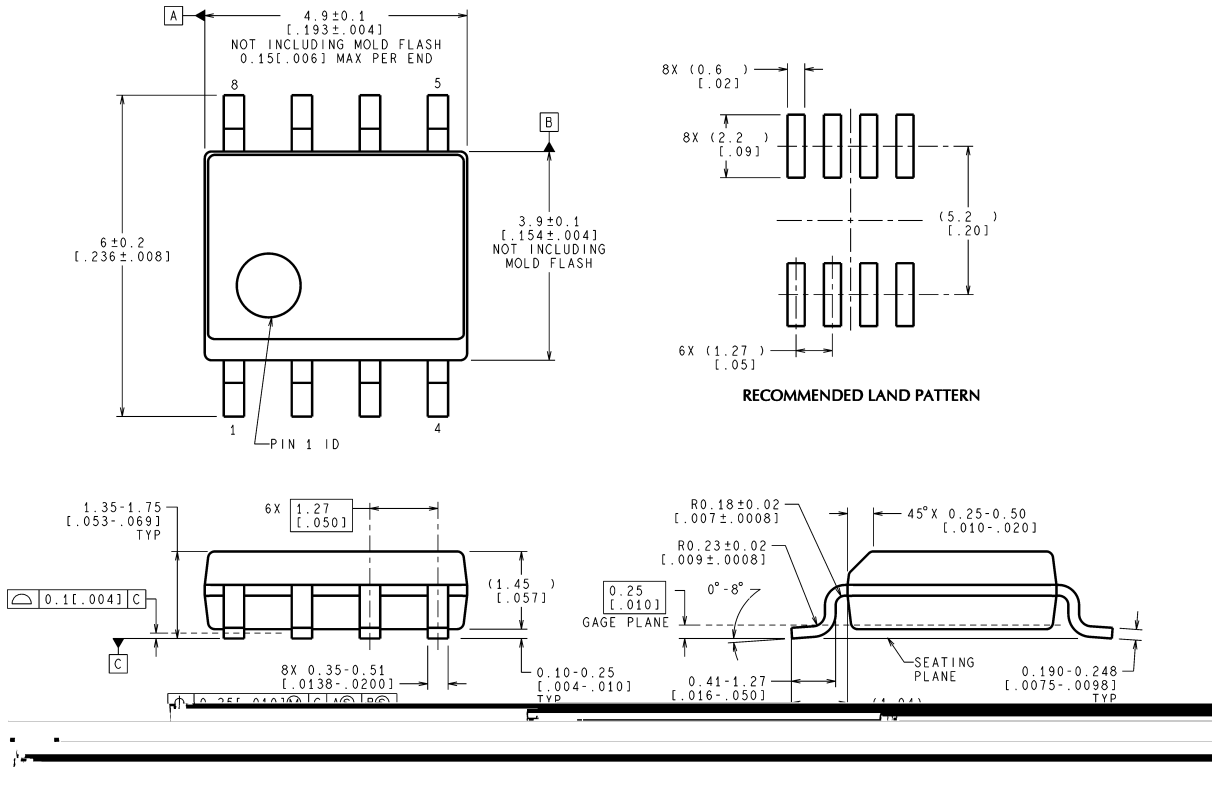

**Plastic Surface-Mount Package (M)**  
**Order Number LM3578AM**  
**NS Package Number M08A**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

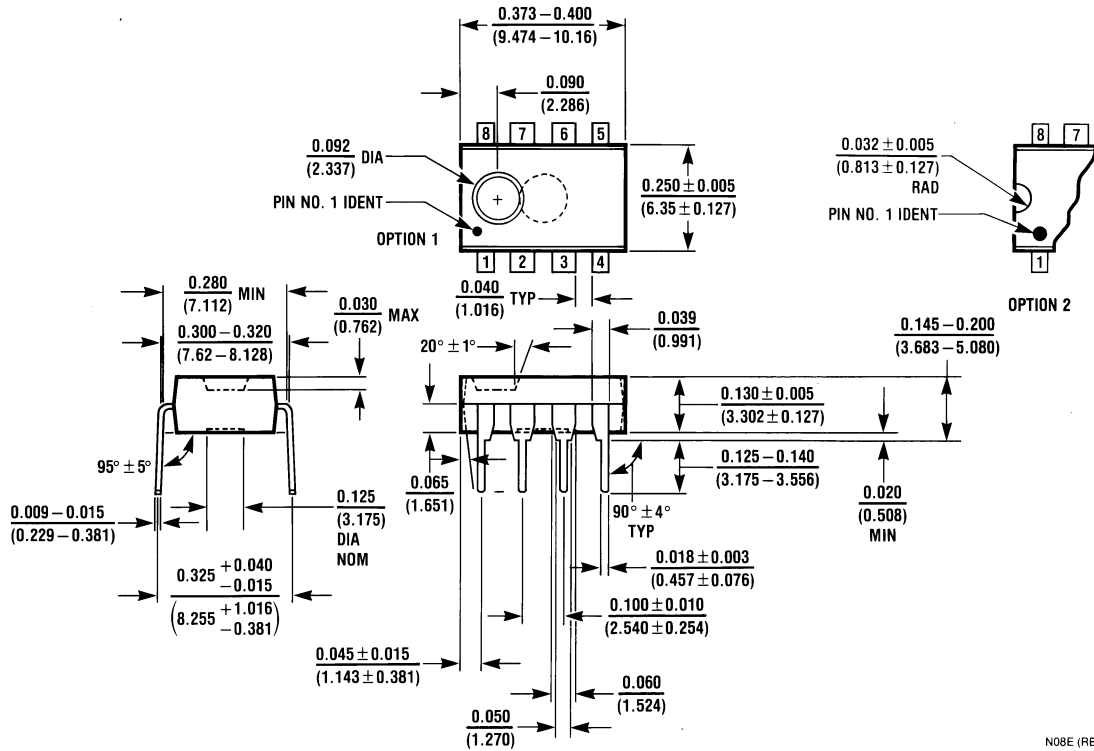

**Molded Dual-In-Line Package (N)**  
**Order Number LM2578AN or LM3578AN**  
**NS Package Number N08E**

N08E (REV F)

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at [www.national.com](http://www.national.com).

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**BANNED SUBSTANCE COMPLIANCE**

National Semiconductor manufactures products and uses packaging materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.

**National Semiconductor**  
**Americas Customer Support Center**  
 Email: [jw.feedback@psc.com](mailto:jw.feedback@psc.com)  
 Tel: 1-800-272-9959

**National Semiconductor**  
**Europe Customer Support Center**  
 Fax: +49 (0) 180-530 85 86  
 Email: [europe.support@psc.com](mailto:europe.support@psc.com)  
 Deutsch Tel: +49 (0) 69 9508 6208  
 English Tel: +44 (0) 870 24 0 2171  
 Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor**  
**Asia Pacific Customer Support Center**  
 Email: [ap.support@psc.com](mailto:ap.support@psc.com)

**National Semiconductor**  
**Japan Customer Support Center**  
 Fax: 81-3-5639-7507  
 Email: [jp.feedback@psc.com](mailto:jp.feedback@psc.com)  
 Tel: 81-3-5639-7560