


Notes

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. "TESTeLINK" & Serial No., Black Text.
3. Mark Shrink Upper Shrink Tube on both connectors ends with "DC-70GHz" & Connector Series
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. 100% Tested DC to 70GHz, Plotted Data supplied with assembly.
6. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Plain Bag with ConductRF Label. (See Separate Label Instructions)

TESTeLINK Phase Stable/Los Loss RF Test Cable

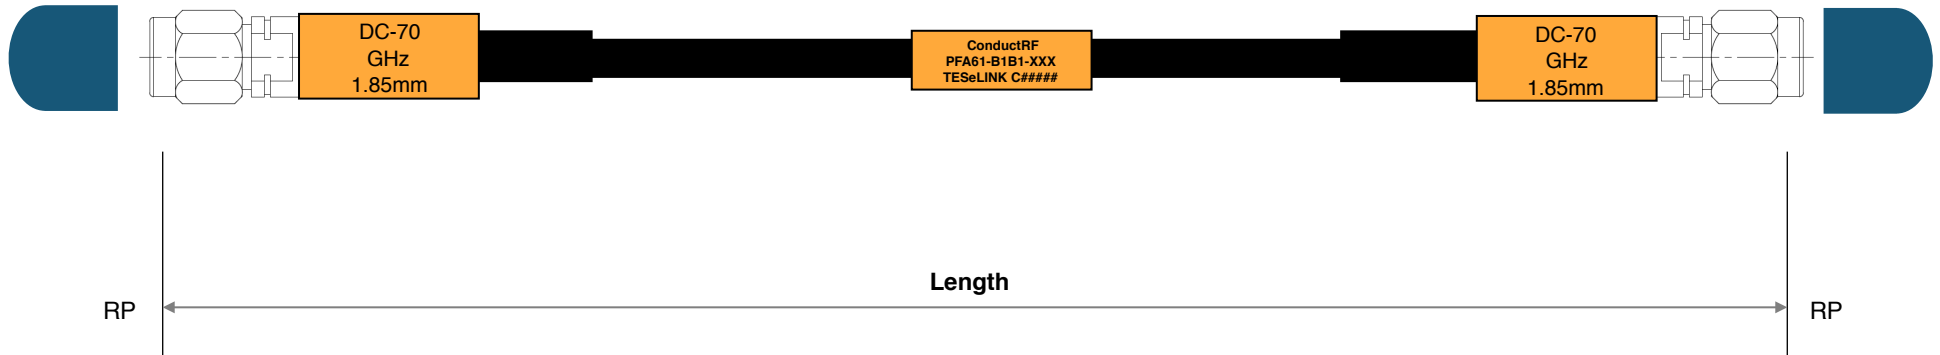

		Max Insertion Loss(dB)
Length	XXX	70GHz
12"	S12	2.862
18"	S18	3.985
24"	F02	5.109
36"	F03	7.355
48"	F04	9.602
0.5M	0M5	4.300
1.0M	1M0	7.984
VSWR(Max)		1.45:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

REV.	DESCRIPTION	ECN	DRAWN	DATE	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: PFA61-B1B1-XXX
1	Pre-Release		DG	10/19/16					
REVISION HISTORY					Customer DWG		Title: TESTeLINK 70GHz Cable - 1.85mm Male to Male		
					Remarks:		Originated: 10/20/15	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: PFA Sheet 1 of 1
							Dwg Ref: PFA61-B1B1		