


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-18GHz"
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 18GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Bag with ConductRF Label.(See Separate Label Instruction)


Site-Flex Phase Stable Rugged RF Test Cable

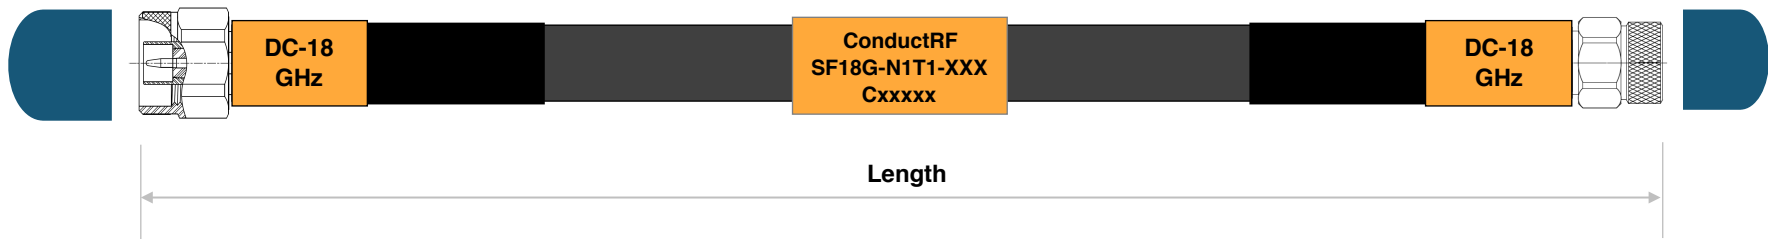

XXX	Length	Max Insertion Loss(dB)		
		9GHz	12GHz	18GHz
1M0	1M	1.729	2.063	2.664
F03	3ft	1.601	1.909	2.463
F05	5ft	2.521	3.012	3.897
F08	8ft	3.901	4.666	6.048
F10	10ft	4.821	5.769	7.482
F12	12ft	5.741	6.872	8.916
VSWR(max)		1.30:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

REVISION HISTORY					Customer DWG	Title: Site-Flex - Type-N Male to TNC Male - DC-18GHz			
2	Corrected Loss Ref.		DG	03/06/17	Remarks:	Originated: 02/19/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: SF	
1	Pre-Release		DG	10/18/16		Dwg Ref: SF18G-N1T1			
REV.	DESCRIPTION	ECN	DRAWN	DATE	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 2	Part No: SF18G-N1T1-XXX