NO. OF CIRCUITS	PART NO.	ENGINEERING NO.	DIM "A" MM	DIM "B" MM
2	2249340002	MX-TLM-705AA-15-02	26.50	15.00
3	2249340003	MX-TLM-705AA-15-03	41.50	30.00
4	2249340004	MX-TLM-705AA-15-04	56.50	45.00
5	2249340005	MX-TLM-705AA-15-05	71.50	60.00
6	2249340006	MX-TLM-705AA-15-06	86.50	75.00
7	2249340007	MX-TLM-705AA-15-07	101.50	90.00
8	2249340008	MX-TLM-705AA-15-08	116.50	105.00
9	2249340009	MX-TLM-705AA-15-09	131.50	120.00
10	2249340010	MX-TLM-705AA-15-10	146.50	135.00
11	2249340011	MX-TLM-705AA-15-11	161.50	150.00
12	2249340012	MX-TLM-705AA-15-12	176.50	165.00

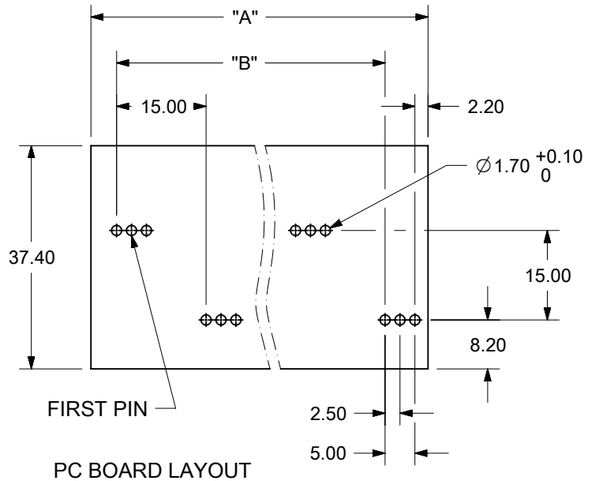

PC BOARD LAYOUT

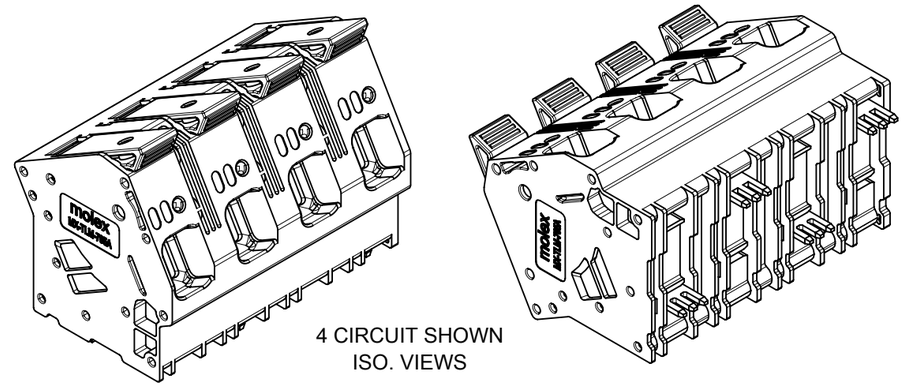

4 CIRCUIT SHOWN
ISO. VIEWS

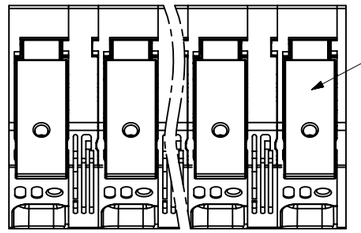

MATERIALS	
1. FIRST HOUSING	PA66 UL94 V-0 (GREEN)
2. LAST HOUSING	PA66 UL94 V-0 (GREEN)
3. ROTATING BRACKET	PA66 UL94 V-0 (BLACK)
4. LEVER	PA66 UL94 V-0 (ORANGE)
5. COVER	PA66 UL94 V-0 (GREEN)
6. SPRING	STAINLESS STEEL
7. FRONT TERMINAL	TIN PLATED COPPER ALLOY
8. REAR TERMINAL	TIN PLATED COPPER ALLOY
9. CIRCUIT SPACER	PA66 UL94 V-0 (GREEN)
ELECTRICAL, MECHANICAL AND THERMAL RATINGS	
MAXIMUM VOLTAGE	600V (PER UL GROUP B, C & D)
	1000V (PER UL GROUP E & F*)
MAXIMUM CURRENT	66A (PER UL GROUP B, C, E & F)
	15A (PER UL GROUP D FOR 51 TO 150V)
	10A (PER UL GROUP D FOR 151 TO 300V)
	5A (PER UL GROUP D FOR 301 TO 600V)
WIRE RANGE	4 TO 18 AWG (SOLID OR STRANDED)
INSULATION RESISTANCE	500MΩ OR MORE AT 500VDC
WITHSTAND VOLTAGE	2200V PER 1 MINUTE
WIRE STRIP LENGTH	18mm TO 20mm
OPERATING TEMPERATURE	-40°C TO +115°C

*1000V MAX. IS ACCEPTABLE AS TERMINAL BLOCK SPACING REQUIREMENTS WERE DETERMINED BASED ON USE IN A CIRCUIT (OR CIRCUITS) WHERE AN ALTERNATIVE SPACING INVESTIGATION WAS CONDUCTED IN ACCORDANCE WITH UL 509 (INDUSTRIAL CONTROL EQUIPMENT) AND UL 508C (POWER CONVERSION EQUIPMENT).

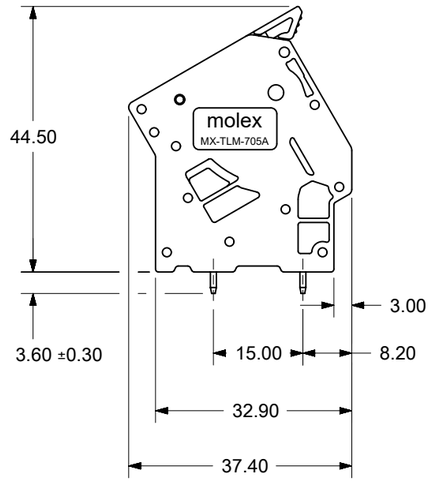

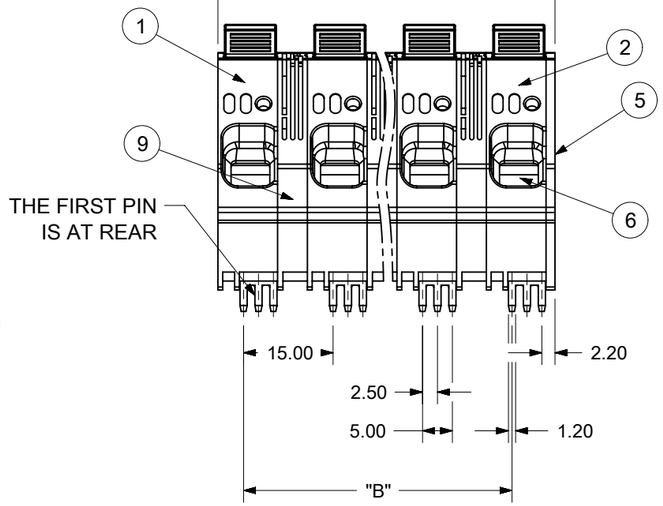



TOTAL PITCH TOLERANCE IN MM									NOMINAL DIMENSION RANGE IN MM								
0 to 30	31 to 53	54 to 70	71 to 90	91 to 115	116 to 150	151 to 200	201 to 250	251 to 320	0 to 30	31 to 53	54 to 70	71 to 90	91 to 115	116 to 150	151 to 200	201 to 250	251 to 320
±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20

DOCUMENT STATUS	P1	RELEASE DATE	2024/04/24 21:49:33

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FD = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS: mm — SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	---
4 PLACES	±	---
3 PLACES	±	---
2 PLACES	±	---
1 PLACE	±	---
0 PLACES	±	---

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NEW RELEASE

EC NO: 762493
DRWN: ABENJAMINLW 2023/09/08
CHK'D: DNGUYEN62 2024/04/24
APPR: WLEUNG 2024/04/24

INITIAL REVISION:
DRWN: ABENJAMINLW 2023/09/08
APPR: WLEUNG 2024/04/24

THIRD ANGLE PROJECTION | DRAWING: B-SIZE | SERIES: 224934

molex

15.00MM 35 DEGREE CLAMP
TERMINAL BLOCK, LEFT REAR TERMINAL

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2249340002	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE CHART	GENERAL MARKET	1 OF 1

FORMAT: master-B-size
REVISION: J1
DATE: 2021/05/01