



Seamless Hubbell System Integration.

Universal Keystone Design fits into all Hubbell Products.


USB 2.0 Performance.

Reversible A and B Interface.


HUBBELL iStation Audio Video Connectors, USB

Low-profile footprint.

Quick and easy connection installation.



Type A-to-A




Type A-to-B

High impact, flame-retardant polymer.

SPECIFICATIONS

- ◆ **Performance:**
 - Type: 2.0
 - Performance: 480 Mbps
 - Mating Cycles: 500+
 - Maximum Distance: 5 Meters
- ◆ **Material:**
 - Housing: Flame Retardant Polymer Rated UL 94V-0.
- ◆ **Cable Type:** standard USB A and B patch cord connections.
- ◆ **Connector Type:** Standard A and B footprint.

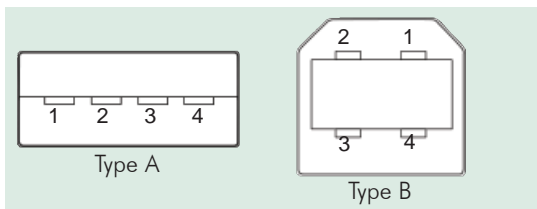

WIRING SPECIFICATIONS

USB signals are transmitted on a twisted pair of data cables, labelled D+ and D-. These collectively use half-duplex differential signaling to combat the effects of electromagnetic noise on longer lines. Transmitted signal levels are 0.0-0.3 volts for low and 2.8-3.6 volts for high.

Pin	Function
1	V(USB (4.75-5.25V))
2	D-
3	D+
4	GND
Shell	Shield

Hubbell's USB 2.0 AV Connectors provide a perfect solution for connecting computer peripherals to a computer workstation, requiring just a plug 'n play patch cord connection. Hubbell's USB-connectors install into standard Hubbell keystone products providing a clean, aesthetic look, integrating all applications into one space.

Hubbell's USB 2.0 AV Connectors are reversible in the AB version. Just simply face which connection you desire on the front of the plate and snap it in. Available in three colors: Office White, White and Blue, these connectors flush mount into **iSTATION™** face plates, modules, frames, poke-throughs, raceway, delivery and UDX multimedia panels.

Create a customized multimedia workstation by adding a USB 2.0 Connector along with Hubbell's extensive line of AV connectors, loaded modules and **XCELERATOR™** jacks.

APPLICATIONS SUPPORTED

- ▲ Connecting peripherals to a computer(s):
 - KVM, keyboards, mouse devices, printers, scanners, external storage, and networking components.
 - PDAs, phones, MP3 players, gamepads and joysticks, digital voice recorders, digital cameras and video recorders.

INSTALLATION TIPS

Important: Always allow for clearance behind connection location to ensure for proper bend radius and patch cord connector depth.

NOTE: USB maximum connection length may not exceed 5 meters, non-active. With amplification, follow manufactures specifications.

CONNECTOR TERM

Universal Serial Bus (USB) is a serial bus standard to interface devices. It was originally designed for personal computers, but it has become commonplace on scanners, printers, handheld devices such as portable memory devices, video game consoles, PDAs and portable media players. USB is also used extensively to connect non-networked devices, replacing the parallel ports that had previously been in wide use; USB simplifies connecting several devices to one computer.


iSTATION™ USB 2.0 AV Connectors




Color	Format: A-to-A Catalog No.	Format: A-to-B Catalog No.
Blue	SFUSBAAB	SFUSBABB
Office White	SFUSBAAOW	SFUSBABOW
White	SFUSBAAW	SFUSBABW

DIMENSIONS


Type A

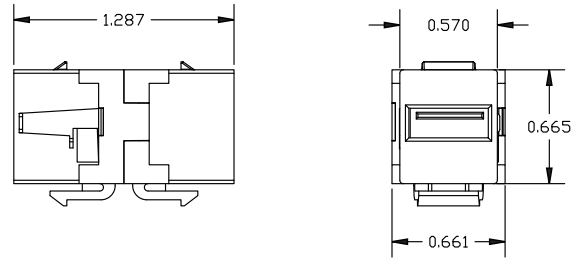

Type B

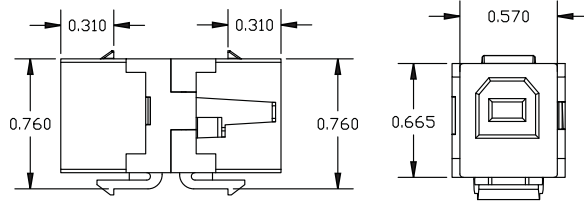

CONNECTOR DEPTH CHART

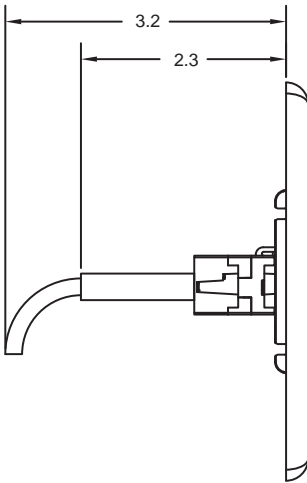

iSTATION™ COMPATIBLE

Work Station and Cross-Connect Solutions

- Front and Rear-loading Plates
- Duplex and Decorator Frames
- ISM Surface Mount Boxes
- UDX Multimedia Panels (except 1U-48)
- netSELECT™: Residential Network Solution
- iFRAME™ Vertical Patch Panel




Hubbell Delivery System

- Hubbell SystemOne Poke-Throughs and Floor Boxes
- Hubbell Surface Raceway, Metal and Non-Metallic
- Multi-Connect™ Wall Boxes/Conference Table Boxes
- Power Poles



TYPICAL APPLICATION

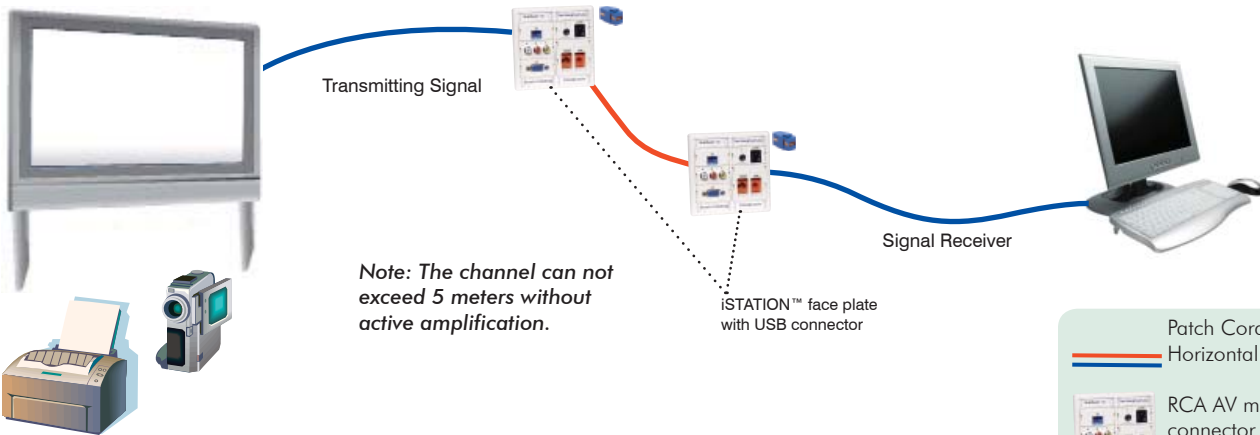

Patch Cords

Horizontal Cable

RCA AV module/connector in a Hubbell iSTATION™ face plate.



Hubbell Premise Wiring

HUBBELL INCORPORATED (Delaware)
 14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005
 Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

Worldwide Locations

Hubbell Premise Wiring, Asia Pacific	852-2836-7131	Fax: 852-2836-7132	Hubbell Premise Wiring, Latin America	305-408-4501	Fax: 305-408-8201
Hubbell Canada Inc.	905-839-1138	Fax: 905-839-9108	Hubbell de Mexico, S.A. de C.V.	(5255) 9151-9999	Fax: (5255) 9151-9989
Hubbell Premise Wiring, Central America	506-309-4158	Fax: 506-260-1616	Hubbell Premise Wiring, Middle East	971-4-393-4192	Fax: 971-4-393-4194
Hubbell Premise Wiring, China	86-21-6374 2660	Fax: 86-21-6374 2799	Hubbell Premise Wiring, Puerto Rico	787-855-1075	Fax: 787-855-3265
Hubbell Premise Wiring, Europe	44-01283 500500	Fax: 44-01283 500400	Hubbell-Taian Co., Ltd., Taiwan	886-2-2522-1862	Fax: 886-2-2522-1872
Hubbell Premise Wiring, India	91-80-4022-4089	Fax: 91-80-4022-4033	Hubbell Premise Wiring, Venezuela	58-212-5156482	Fax: 58-212-6627258
Hubbell Int'l. Inc., Korea Branch	(82 2) 2607 1363	Fax: (82 2) 2603 7386			