


ISS.	AMEND	DATE
1	1st DRAWN	28/04/94
2	PC A/S REDRAWN	13/04/95
3	SEE MOD 0214	09/08/96
4	SEE MOD 0221	14/03/97
5	22.0 WAS 22.8	16/09/97
6	WASHER MATERIAL	29/06/01
7	22.3 WAS 22.0+UPDATED	08/02/16
8	VARIANTS REMOVED	12/08/24

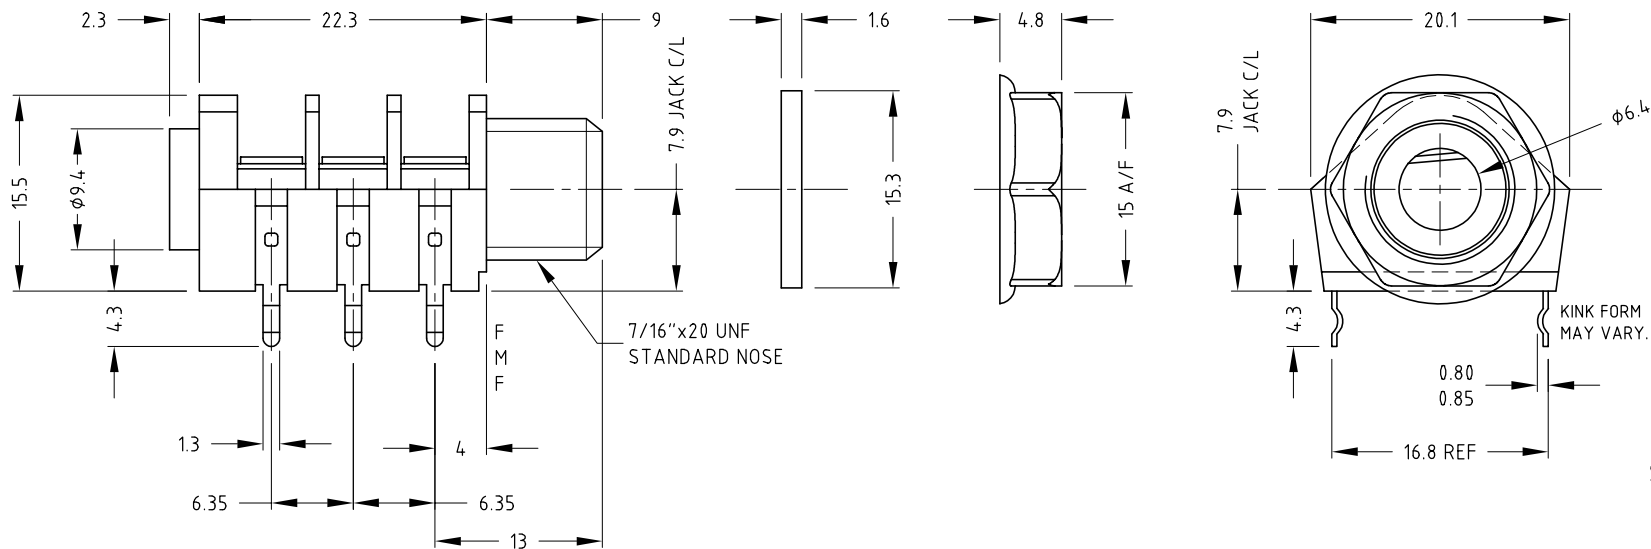


SPECIFICATION
Withstand voltage: 2000V DC Min.
Maximum Current: 5A
Temperature Rating: -10° C to +70° C
Life (Minimum): 10,000+ Operations
Nominal Contact Resistance: <50mΩ


NOTES
Nut and washer supplied unassembled
Max panel thickness 4.6mm

DESCRIPTION	MATERIAL	FINISH
BODY	PA66 V2	BLACK
CONTACTS	Ni Ag	TIN / GOLD
NUT	PA66 V2	BLACK
WASHER	FIBRE	BLACK

PART No.	DESCRIPTION	FINISH
CL1227	S2A/BBB/PCC KINKED	TIN
CL1227G	S2A/BBB/PCC KINKED	GOLD

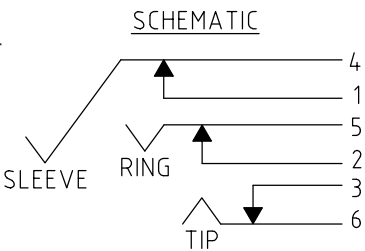

STEREO (BBB) JACK
SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED + CLOSE WHEN PLUG IS WITHDRAWN.

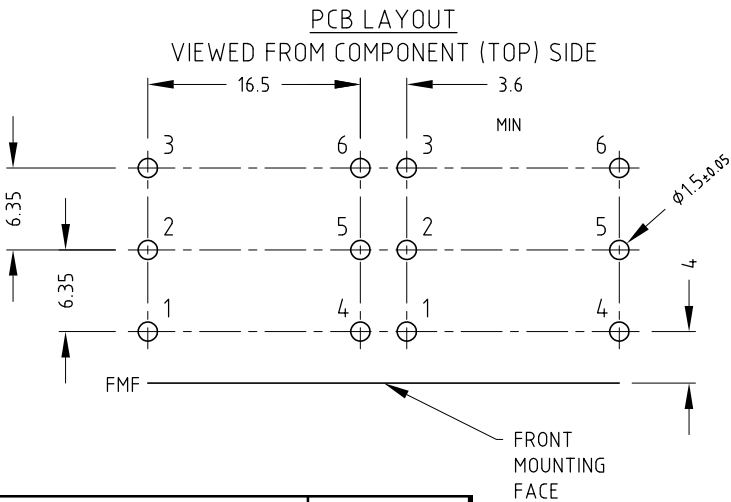

RoHS COMPLIANT
TOLERANCE NO DEC. PLACE ± 1 DEC. PLACE ± 2 DEC. PLACE ± HOLE Ø ± ANGLES ± UNLESS OTHERWISE STATED