
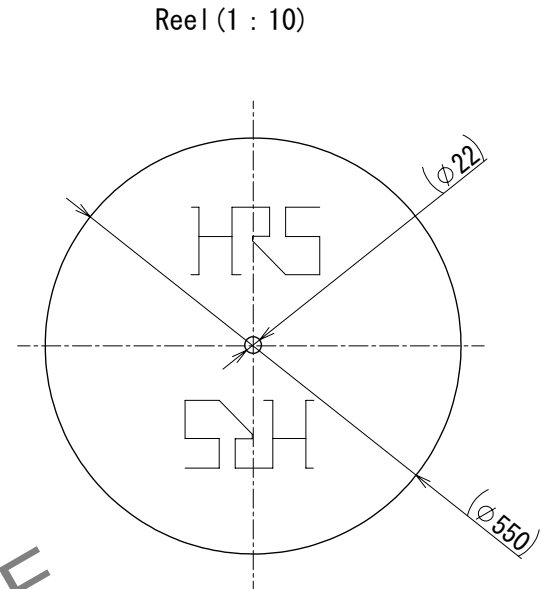


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

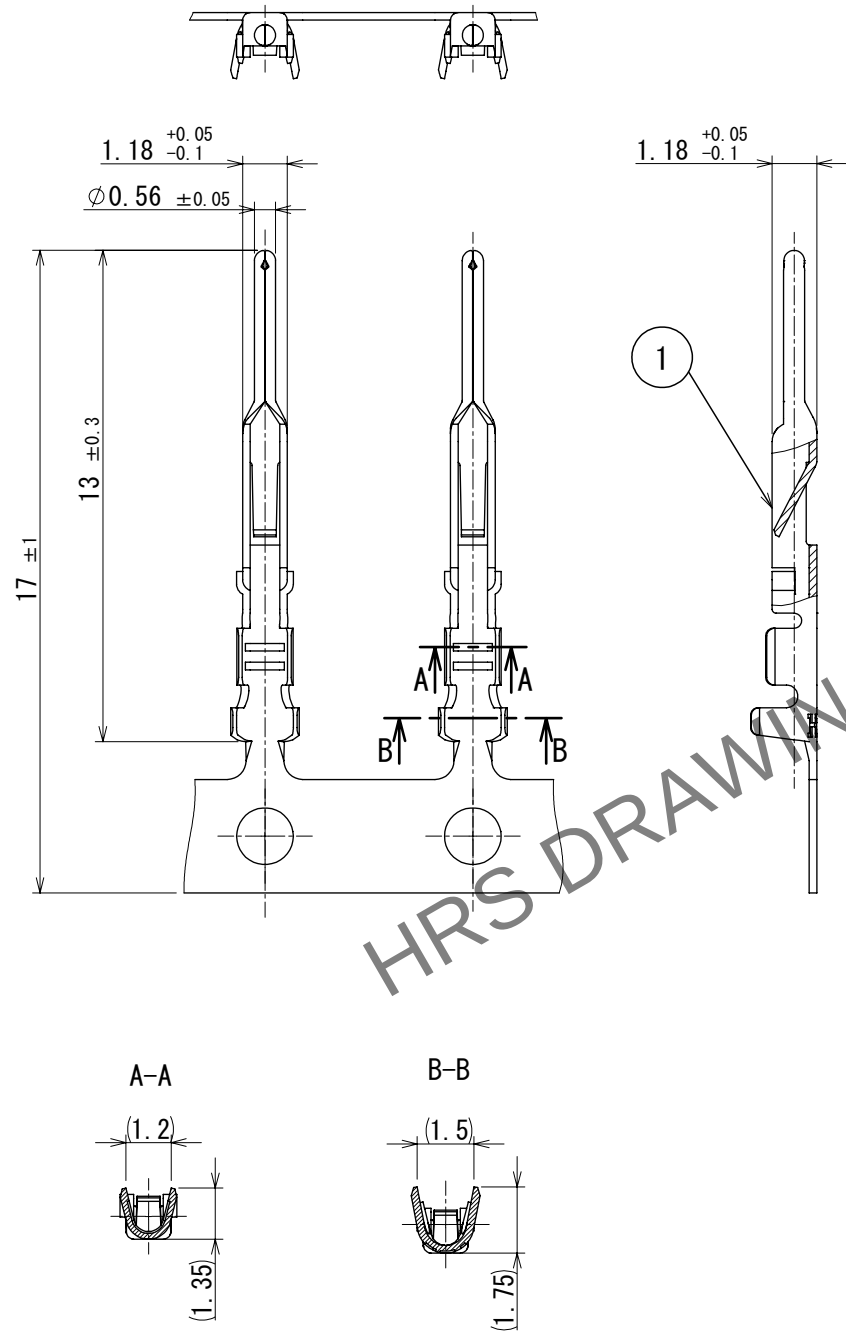

- Notes 1 Applicable wire : AWG#24 to 28 (Insulation diameter : φ1.15 MAX)
2 Applicable crimp contact extraction tool : RP6-SC-TP (CL150-0039-0)
3 Per reel : 10,000 contacts

⚠ CAD change

1	Phosphor bronze	Contact portion : Gold plating 0.2μm min. Underplating : Nickel plating 1μm min.						
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1	COUNT  1	DESCRIPTION OF REVISIONS DIS-C-00018212		DESIGNED TR. YAMANQUE	CHECKED HY. KOBAYASHI	DATE 2024. 08. 23
 HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI		2024. 08. 08		DRAWING NO. EDC-396719-00-00		
		CHECKED : HY. KOBAYASHI		2024. 08. 08		PART NO. HR22-PC1-221		
		DESIGNED : HY. KISHI		2024. 08. 07		CODE NO. CL0122-0094-0-00		
		DRAWN : HY. KISHI		2024. 08. 07		 1 / 1		