Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

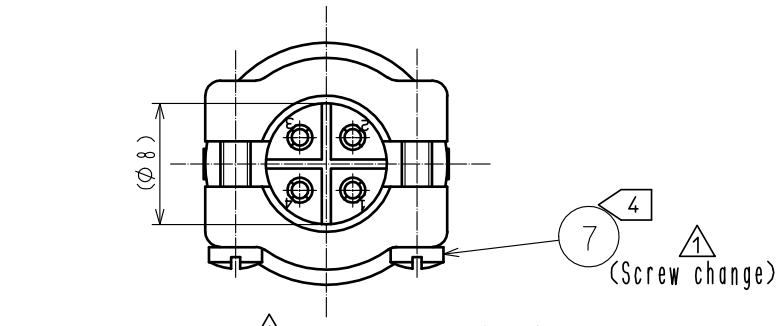

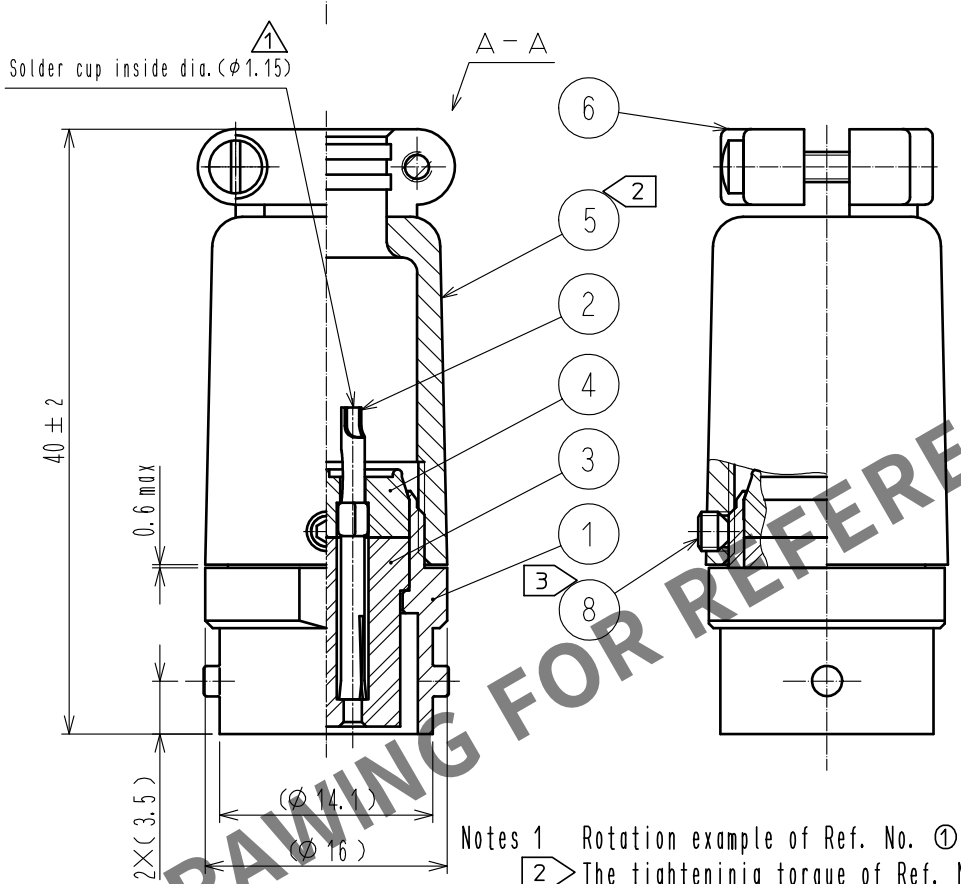

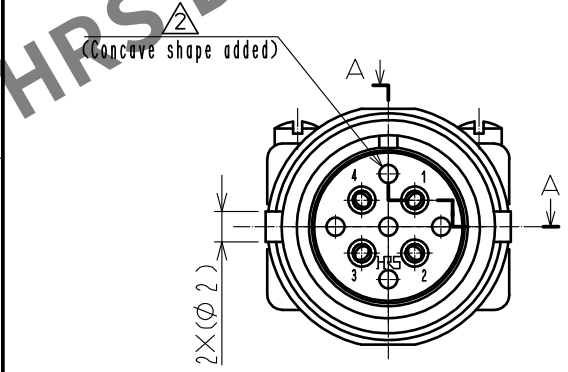

Notes 1 Rotation example of Ref. No. ① and ⑤ are shown.

2 The tighteninig torque of Ref. No. ⑤：2 to 3 N・m.

3 The tighteninig torque of Ref. No. ⑧：0.2 to 0.3 N・m.
Across flats hexagon head of Ref. No. ⑧:1.27
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No.⑧ in order to prevent loosening.

4 The tighteninig torque of Ref. No. ⑦：0.12 to 0.15 N・m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No.⑦ in order to prevent loosening.

5 The cable pull and twisting strength and other characteristics may differ,
depending on the cable structure,
please confirm before the use.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	Polyphenylene sulfide	(Black)	8	Steel	Nickel plating Cross recessed pan head screw M2×0.4×8
3	Polyphenylene sulfide	(Black)	7	Brass	Nickel plating Slotted head screw M2×0.4×8 △1
2	Copper alloy	Silver plating 5μm min.	6	Zinc alloy	Matte finish nickel plated
1	Zinc alloy	Matte finish nickel plated	5	Zinc alloy	Matte finish nickel plated

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△2	1	DIS-C-00016513	TY. SUZUKI	HY. KOBAYASHI	20231113

HIROSE ELECTRIC CO., LTD.	APPROVED : TP. KOMATSU 20230419	DRAWING NO.	EDC-006965-81-00
	CHECKED : TP. KOMATSU 20230419	PART NO.	RM12BJB-4S(81)
	DESIGNED : HT. ZENBA 20230419	CODE NO.	CL0109-0640-8-81 △2 1/1
	DRAWN : KR. SUZUKI 20230419		