


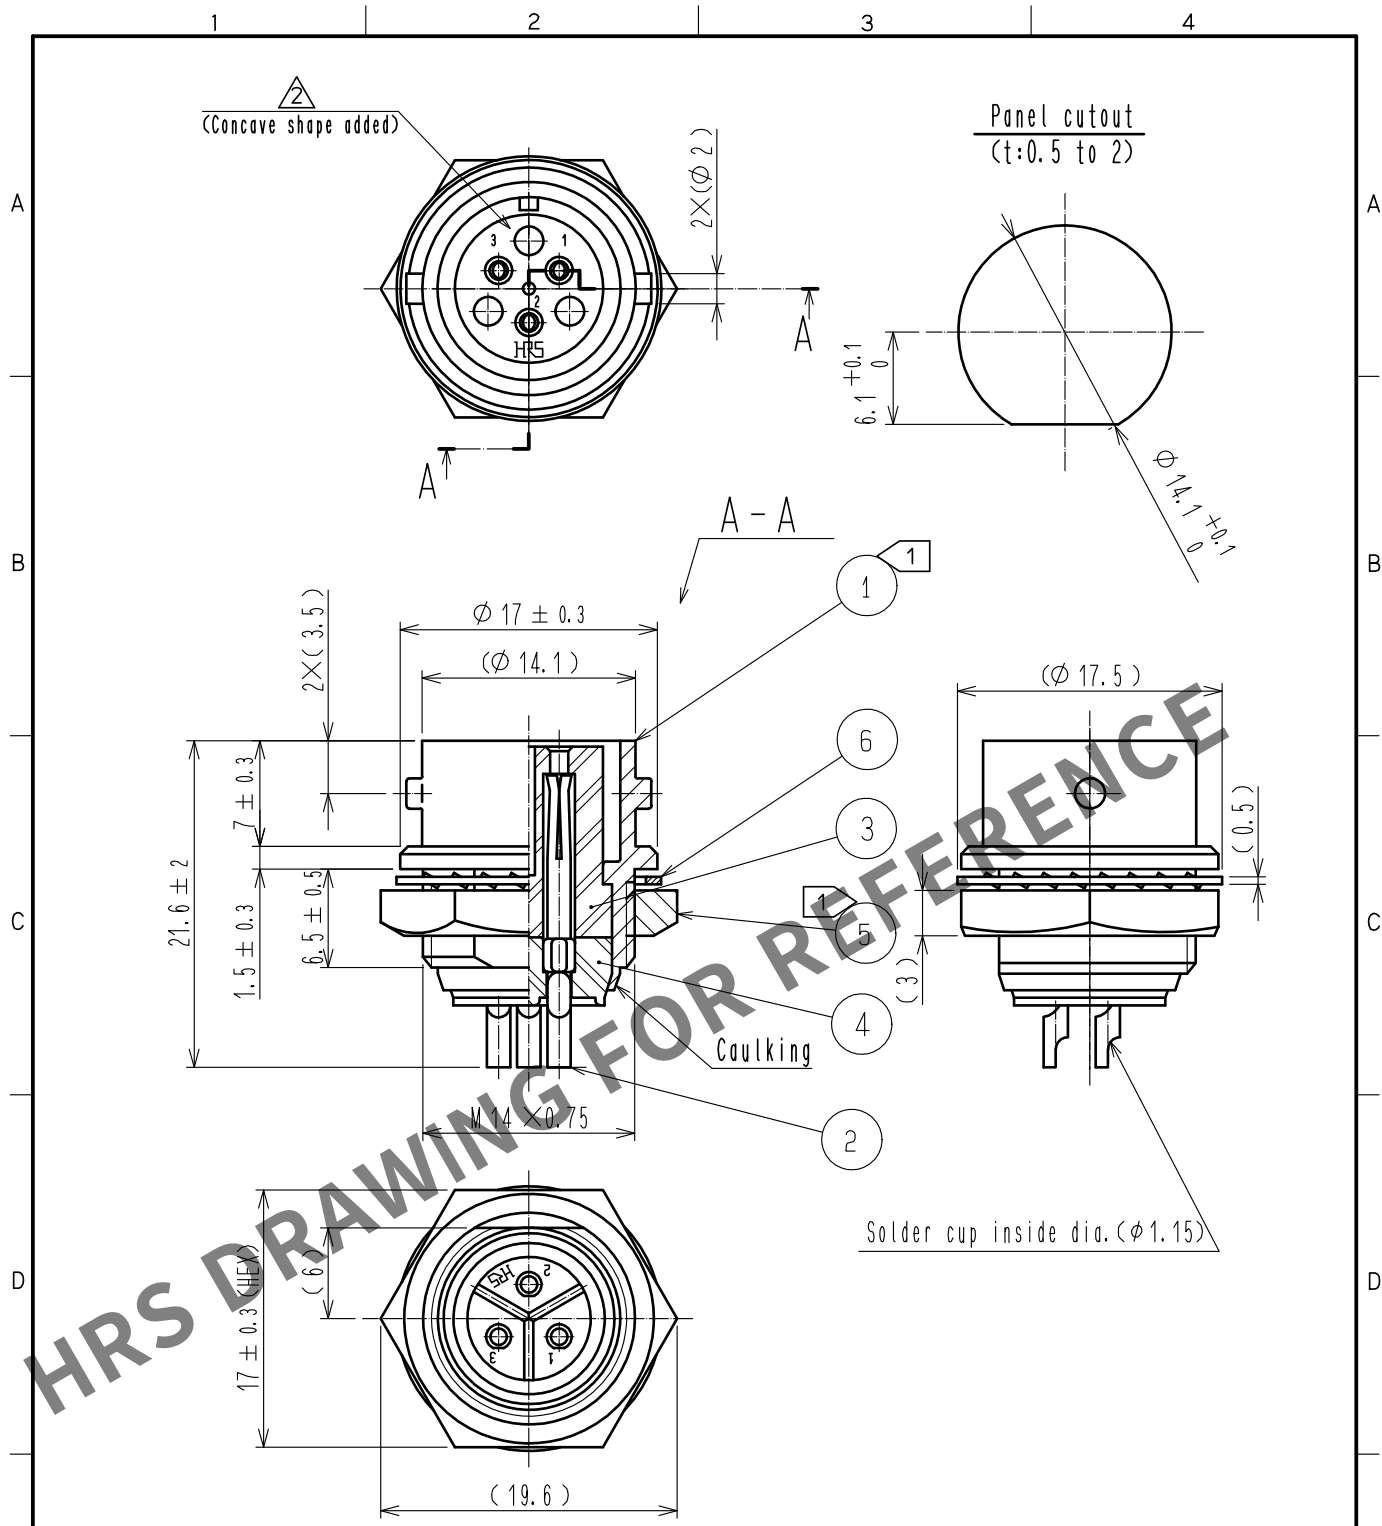

Note 1 The tightening torque of Ref. No. ⑤ : 2 to 2.5 N · m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M14×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating									
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating									
1	Zinc alloy	Matte finish nickel plating	4	Polyphenylene sulfide	(Black)									
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS								
UNITS mm				SCALE 2 : 1		COUNT 	1	DESCRIPTION OF REVISIONS DIS-C-00016537		DESIGNED TY. SUZUKI		CHECKED HY. KOBAYASHI	DATE 20240201	
HIROSE ELECTRIC CO., LTD.				APPROVED : TP. KOMATSU		20230601		DRAWING NO.		EDC-006763-81-00				
				CHECKED : HY. KOBAYASHI		20230601		PART NO.		RM12BRD-3S(81)				
				DESIGNED : HT. ZENBA		20230601		CODE NO.		CL0109-0610-7-81				
				DRAWN : KR. SUZUKI		20230531								