

SANMOTION F2

2-PHASE STEPPING SYSTEMS

Small Size 2-Phase Stepping Motor

14mm sq. (.55 inch sq.)



Features

Industry's Top Small 14 mm sq. and Light Weight 28 g

The information is current as of December, 2011. The above data is based on our own research, collected among 2-phase stepping motors for industrial use.

High Torque

Application


Devices where mountable space is quite limited such as an electric gripper and an electric cylinder

Specification


1.8° /Step Bipolar winding

Model		Holding torque at 2-phase energization [N·m (oz·in) MIN.]	Rated current [A/phase]	Wiring resistance [Ω /phase]	Winding inductance [mH/phase]	Rotor inertia [$\times 10^{-4}$ kg·m ² (oz·in ²)]	Mass [kg(lbs)]
Single shaft	Double shafts						
SH2141-5541	SH2141-5511	0.0065 (0.92)	0.3	21	4.2	0.00058 (0.0032)	0.028 (0.062)

Pulse rate-torque characteristics

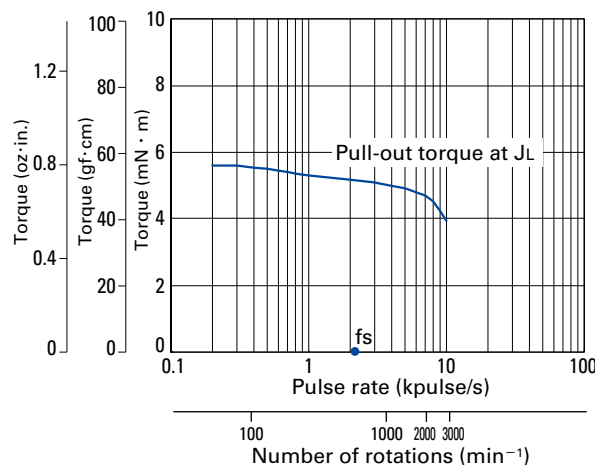

Dimensions [unit : mm (inch)]

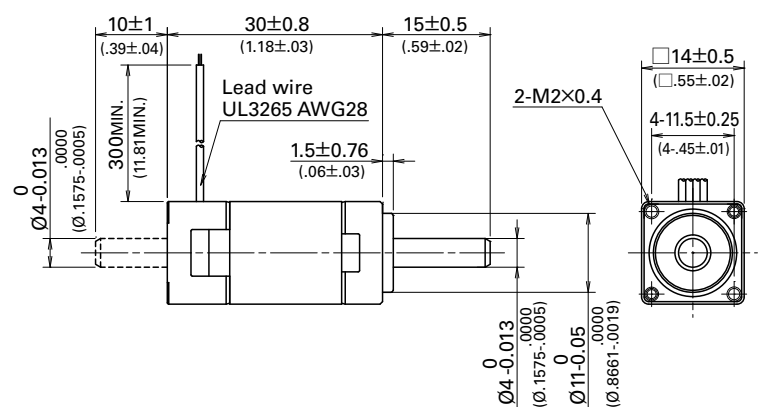

- Constant current circuit
- Source voltage: 24 V DC
- Operating current: 0.3A/phase
- 2-phase energization (full-step)
- $J_L=0.01 \times 10^{-4}$ kg·m² (pulley balancer method)
- fs: No load maximum starting pulse rate

The data are measured under the drive condition of our company. The drive torque may vary depending on the accuracy of customer-side equipment.