
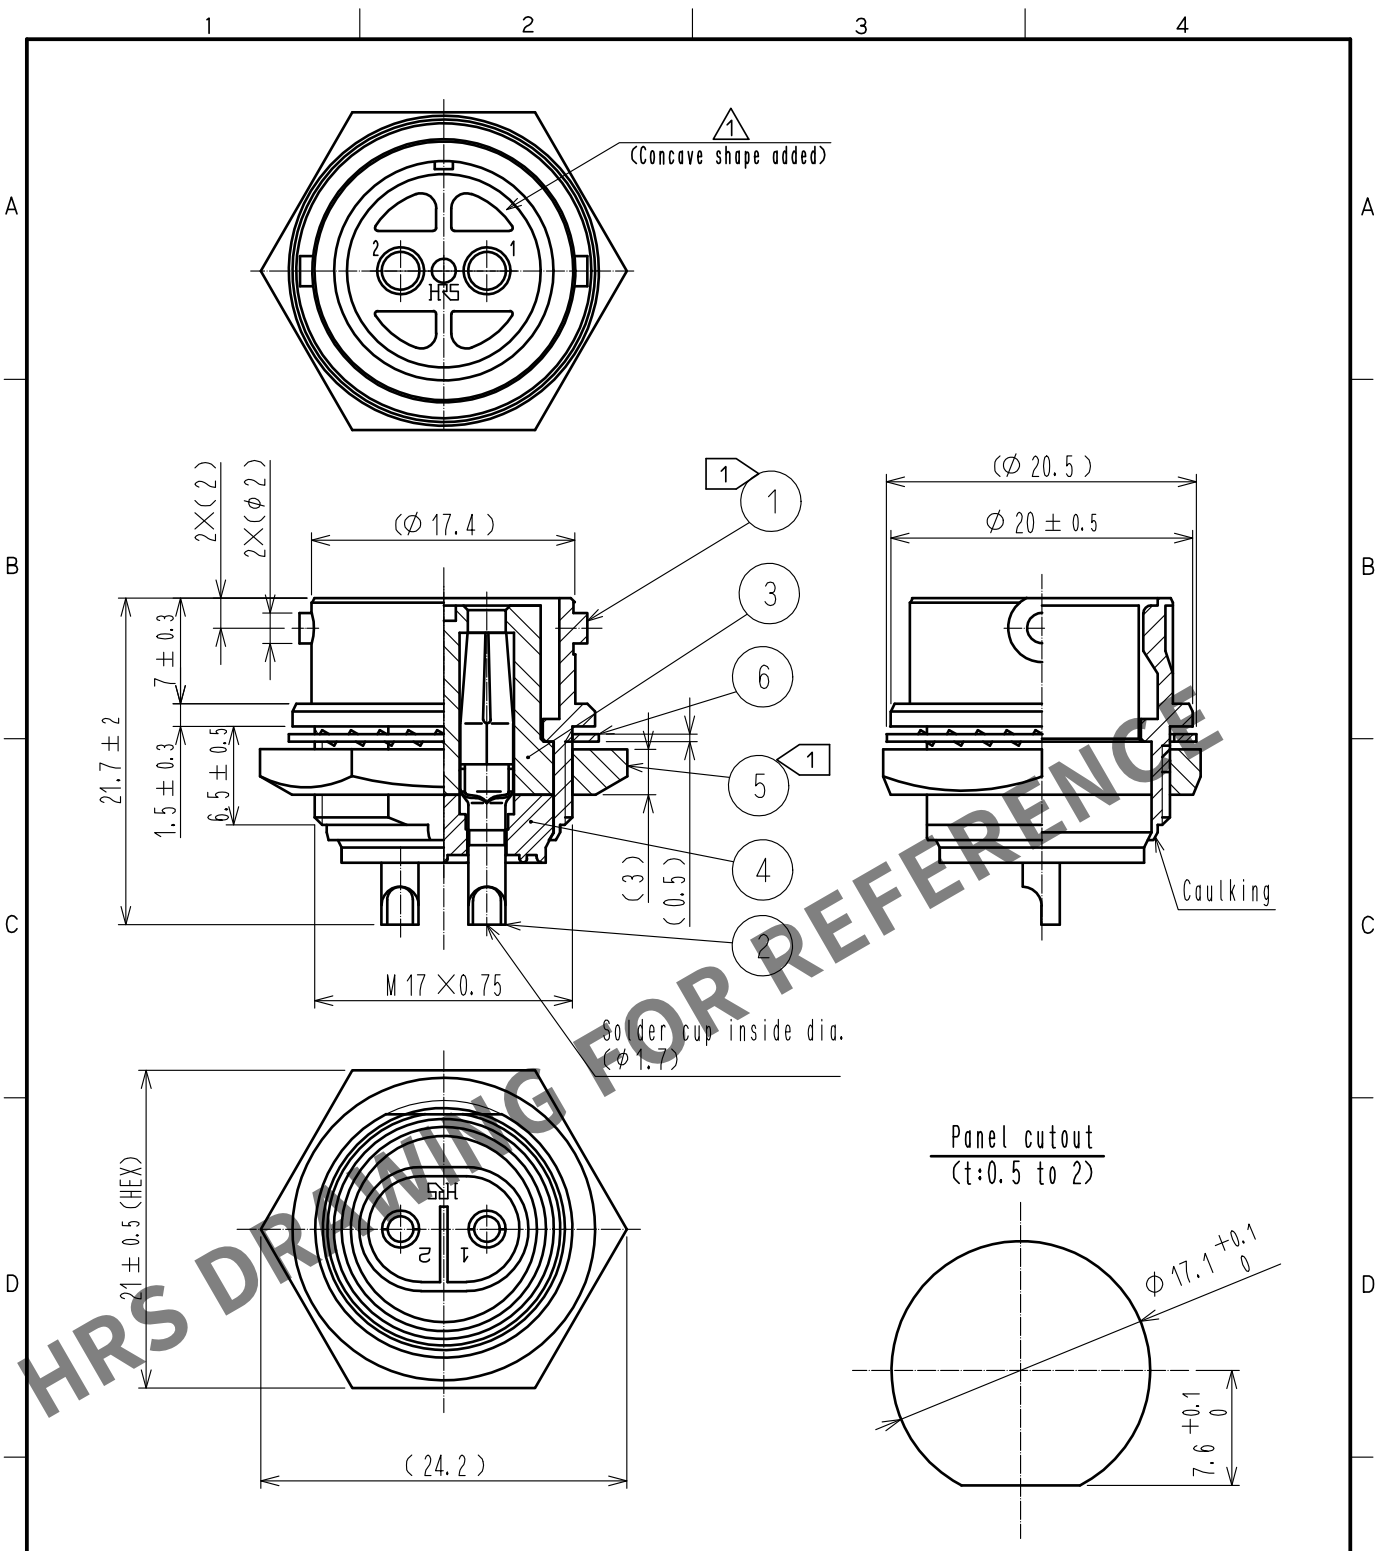


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Note ① The tightening torque of Ref. No. ⑤: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating					
2	Copper alloy	Silver plating 2μm min.	5	Brass	Nickel plating					
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00016507	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20231110
 HIROSE ELECTRIC CO., LTD.				APPROVED +HY. KOBAYASHI 20230601		DRAWING NO. EDC-027729-81-00				
				CHECKED +HY. KOBAYASHI 20230601		PART NO. RM15QRD-2SA(81)				
				DESIGNED +HT. ZENBA 20230601		CODE NO. CL0109-0841-0-81				
				DRAWN +KR. SUZUKI 20230601		 1/1				