


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

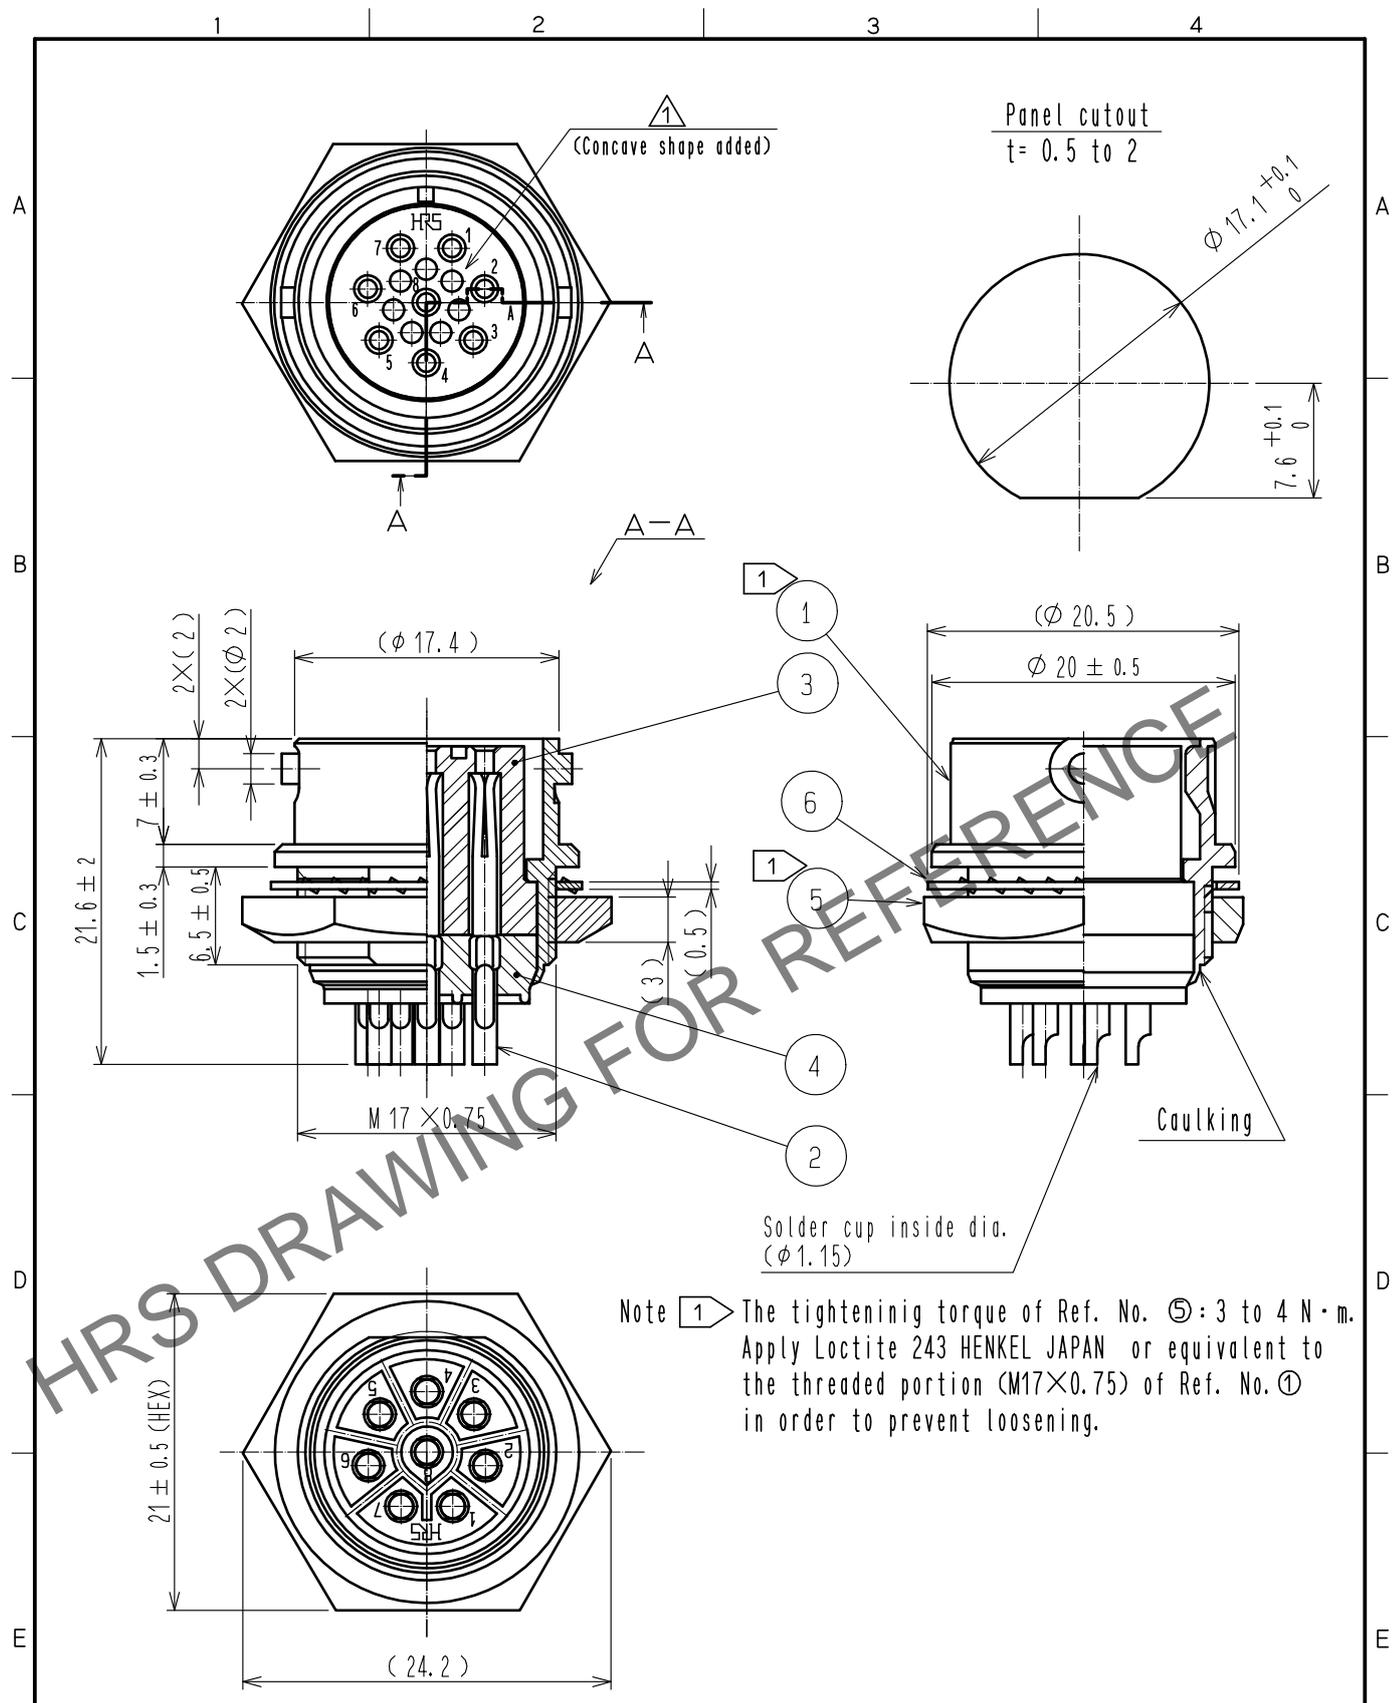

Note ① The tightening torque of Ref. No. ⑤: 3 to 4 N·m.  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00016481	DESIGNED TY. SUZUKI
HIROSE ELECTRIC CO., LTD.		APPROVED :HY. KOBAYASHI 20230512	DRAWING NO. EDC-028514-81-00		
		CHECKED :HY. KOBAYASHI 20230512	PART NO. RM15QRD-8S(81)		
		DESIGNED :HT. ZENBA 20230512	CODE NO. CL0109-0864-5-81		
		DRAWN :KR. SUZUKI 20230512	1/1		