


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

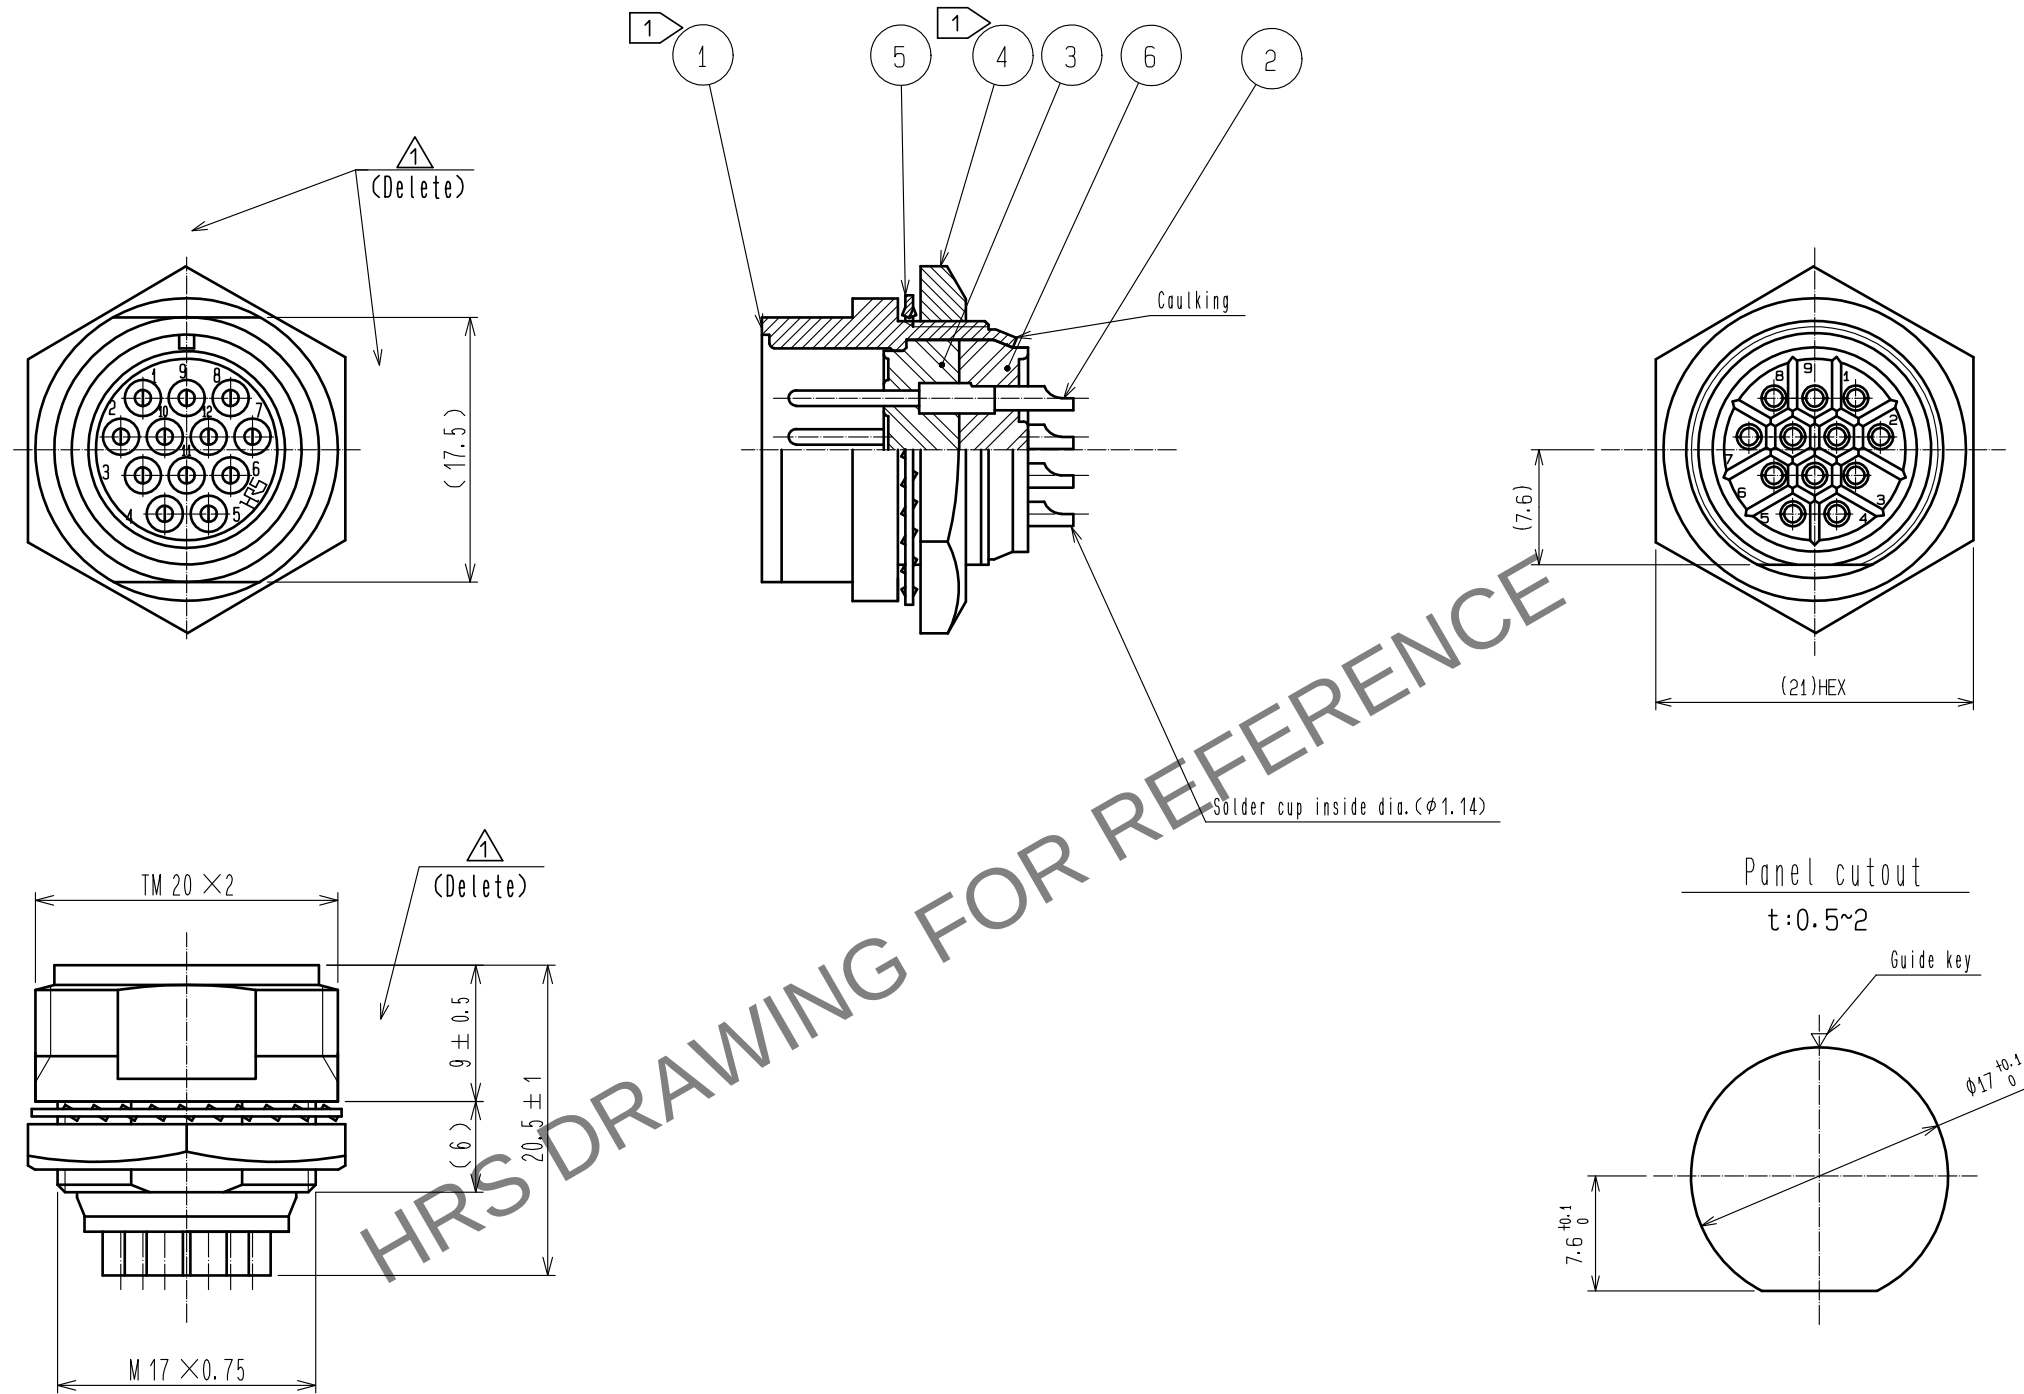

Note ① The tightening torque of Ref. No. ④: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide (Black)	6	Polyphenylene sulfide (Black)					
2	Copper alloy	5	Phosphor bronze	Nickel plating				
1	Zinc alloy	4	Brass	Nickel plating				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00015639		DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20230626
HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	20221227	DRAWING NO. EDC-007494-81-00				
		CHECKED : HY. KOBAYASHI	20221227	PART NO. RM15TRD-12P(81)				
		DESIGNED : HT. ZENBA	20221227	CODE NO. CL0109-0662-0-81				
		DRAWN : KR. SUZUKI	20221227					