


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

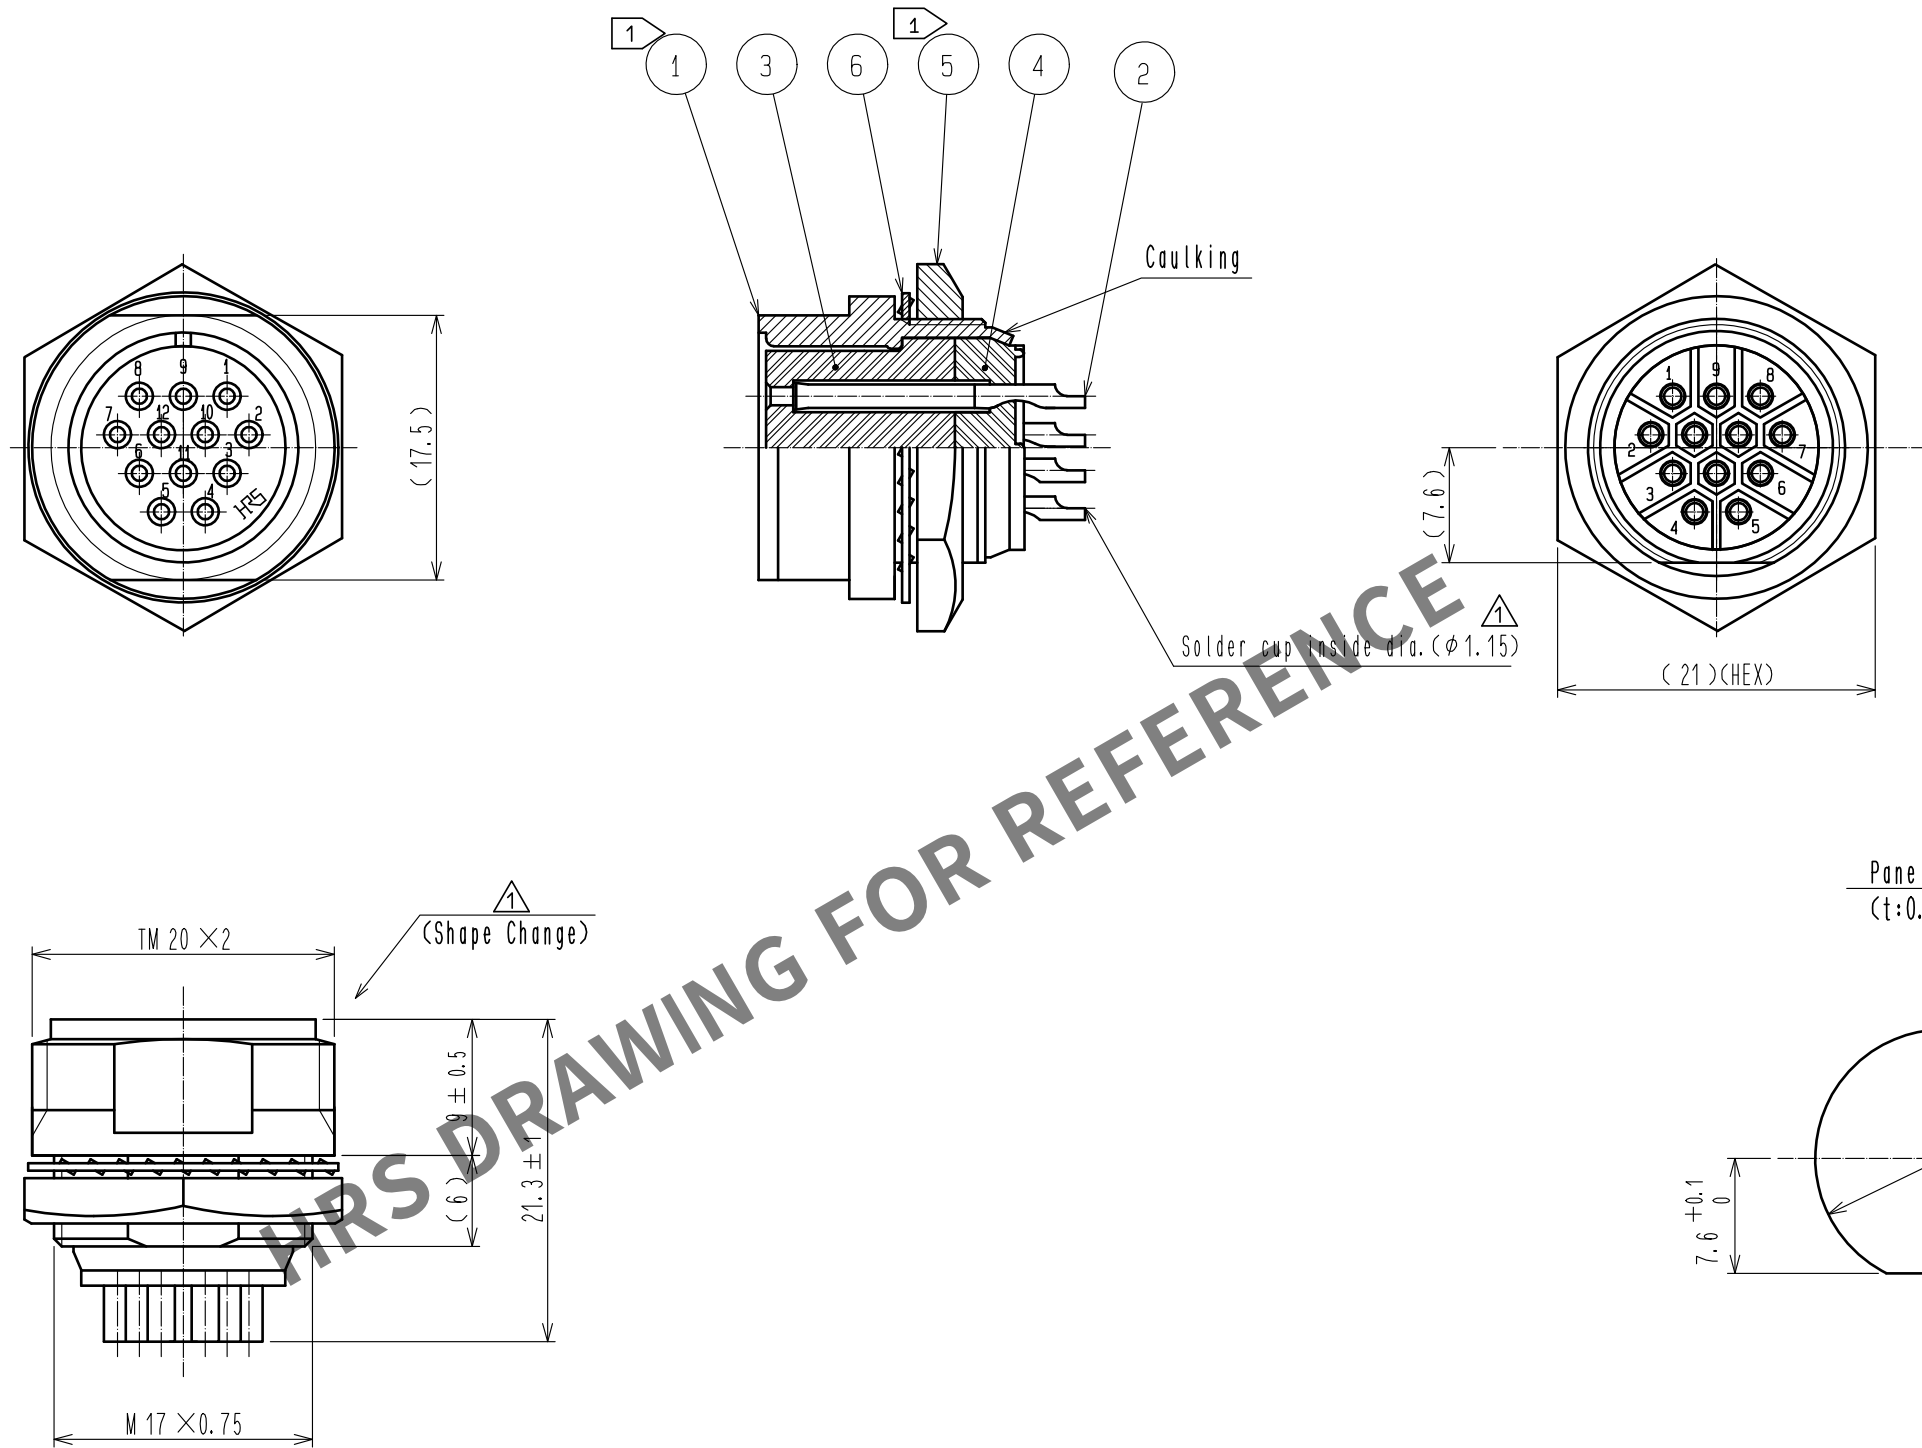

Note ① The tightening torque of Ref. No. ⑤: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of
Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating
1	Zinc alloy	Matte finish chrome plate	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00015639	DESIGNED HT. ZENBA
HIROSE ELECTRIC CO., LTD.		APPROVED : TP. KOMATSU	20230328	DRAWING NO. EDC-007495-81-00	
		CHECKED : HY. KOBAYASHI	20230327	PART NO. RM15TRD-12S(81)	
		DESIGNED : HT. ZENBA	20230327	CODE NO. CL0109-0663-3-81	
		DRAWN : KR. SUZUKI	20230322		
				CHECKED HY. KOBAYASHI	DATE 20230626