Mar.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

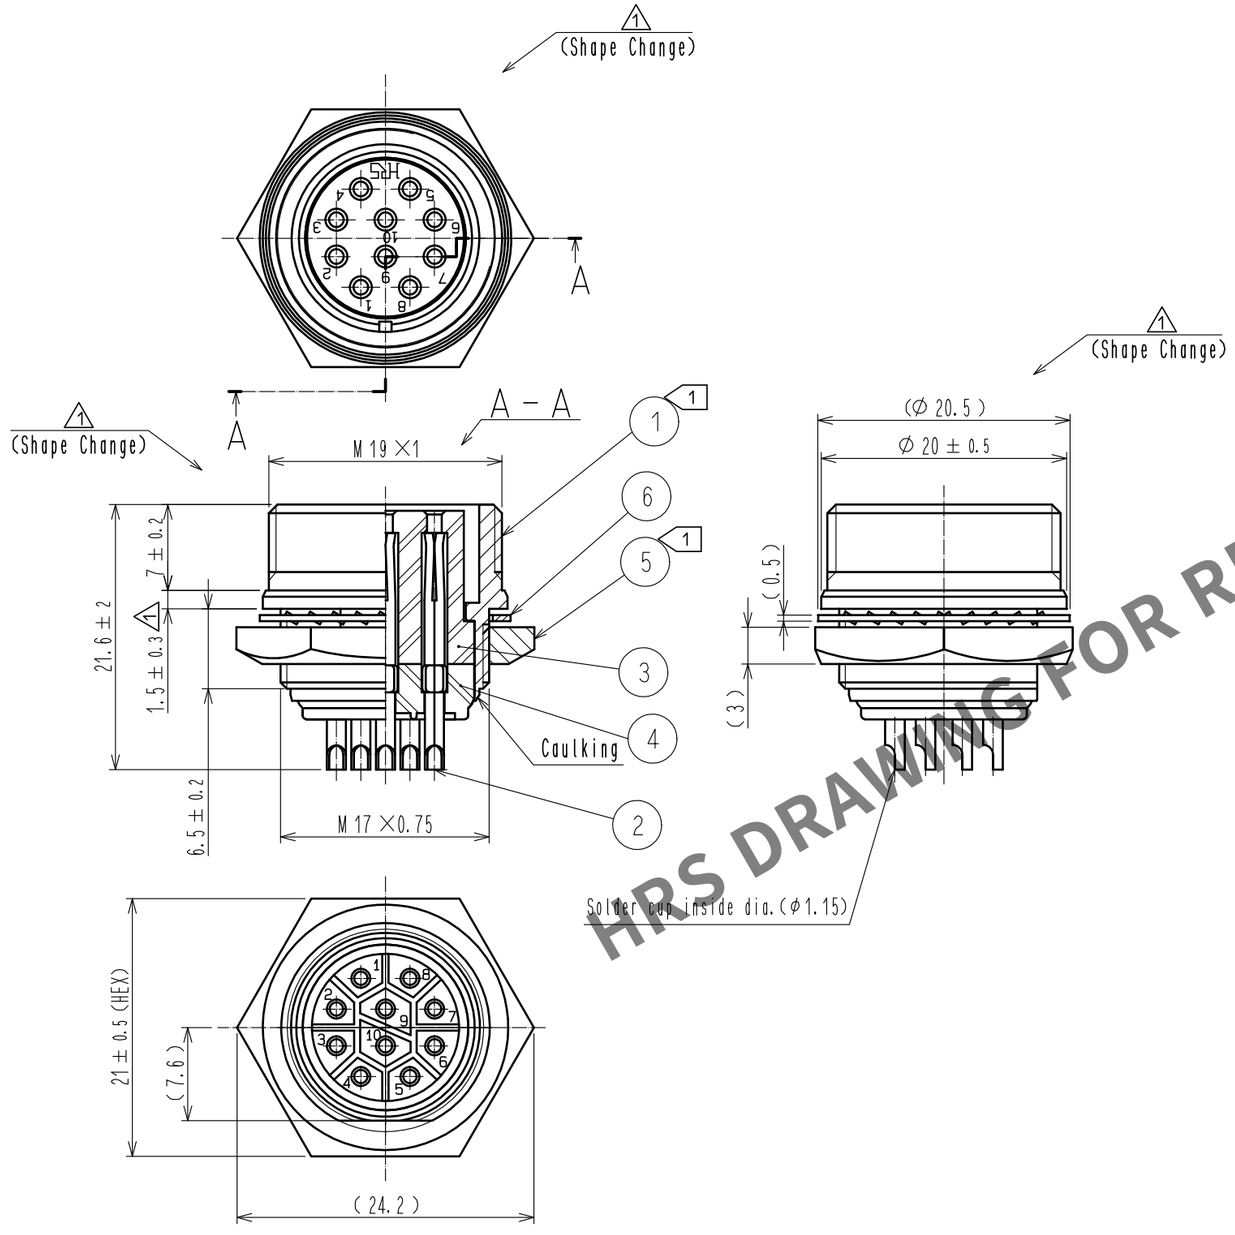

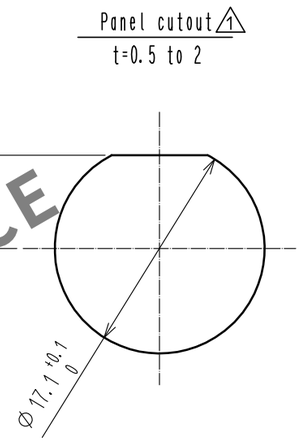

HRS DRAWING FOR REFERENCE

Note 1 The tighteninig torque of Ref. No. ⑤ : 3 to 4 N・m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	5	DIS-C-00015648	HT. ZENBA	HY. KOBAYASHI	20230626

HIROSE ELECTRIC CO., LTD.

APPROVED	TP. KOMATSU	20230328
CHECKED	HY. KOBAYASHI	20230327
DESIGNED	HT. ZENBA	20230327
DRAWN	KR. SUZUKI	20230322

DRAWING NO.	EDC-028519-81-00
PART NO.	RM15TRH-10S(81)
CODE NO.	CL0109-0869-9-81

1/1