


Feb.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

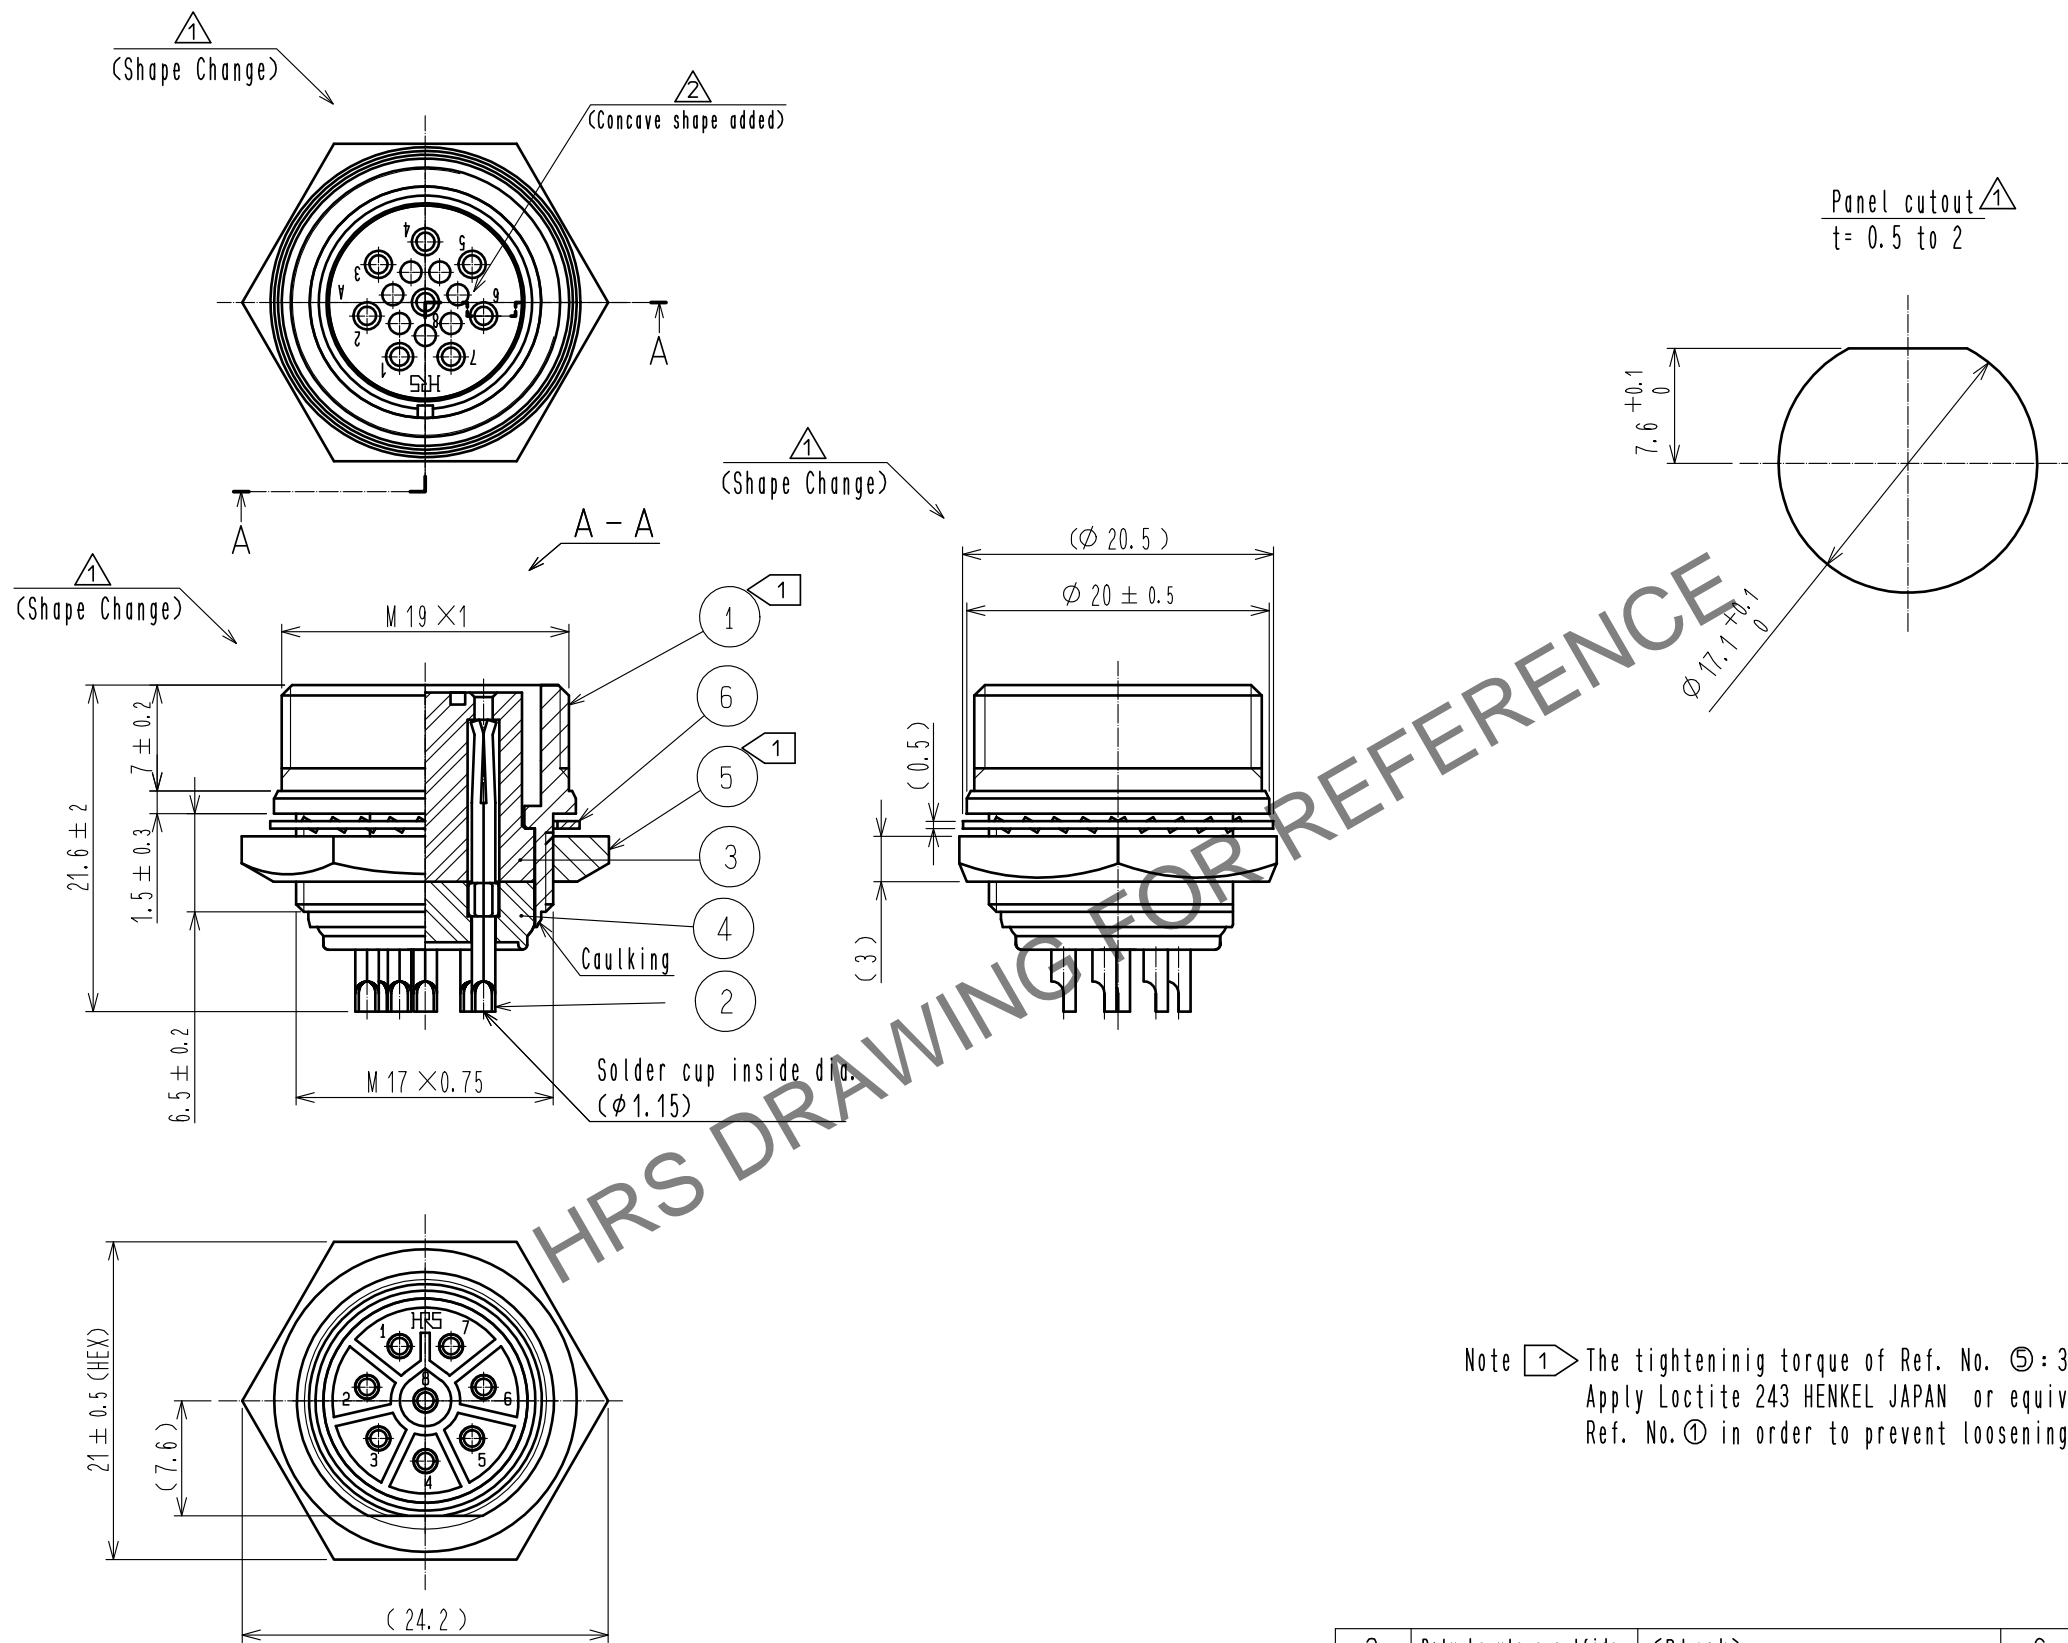

Note ① The tightening torque of Ref. No. ⑤ : 3 to 4 N·m.  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm			SCALE 2 : 1		
COUNT 1			DESCRIPTION OF REVISIONS DIS-C-00016481		
APPROVED : HY. KOBAYASHI 20230512			DESIGNED TY. SUZUKI		
CHECKED : HY. KOBAYASHI 20230512			CHECKED HY. KOBAYASHI		
DESIGNED : HT. ZENBA 20230512			DATE 20231110		
DRAWN : KR. SUZUKI 20230512			DRAWING NO. EDC-028518-81-00		
			PART NO. RM15TRH-8S(81)		
			CODE NO. CL0109-0868-6-81		