
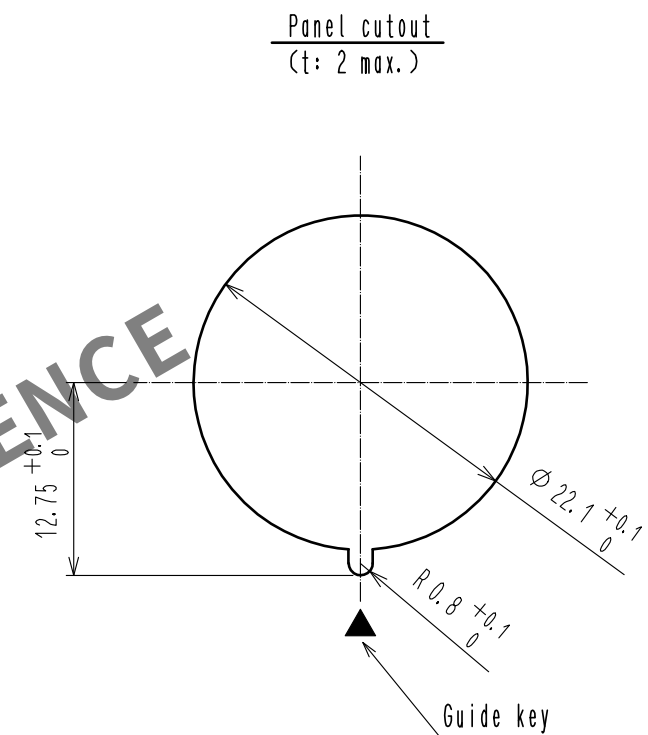


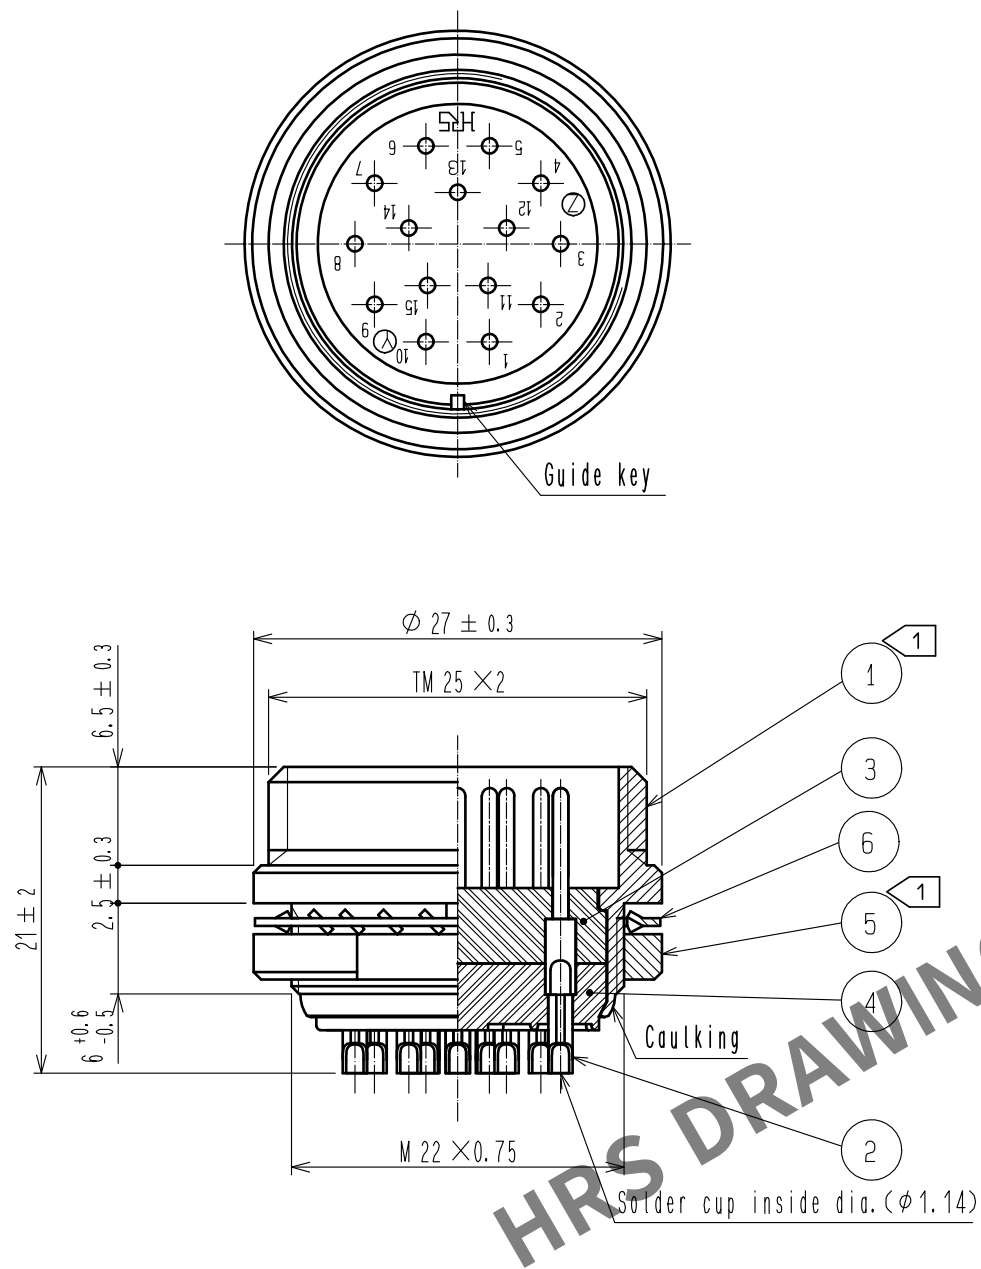

Note ① The tightening torque of Ref. No. ⑤: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M22×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Brass	Silver plating 4 μm min.	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT		DESCRIPTION OF REVISIONS
HRS		APPROVED : TP. KOMATSU	20230616	DRAWING NO. EDC-003737-81-00	
HIROSE ELECTRIC CO., LTD.		CHECKED : HY. KOBAYASHI	20230616	PART NO. RM21TR-15P(81)	
		DESIGNED : HT. ZENBA	20230616	CODE NO. CL0109-0325-0-81	
		DRAWN : KR. SUZUKI	20230614		