

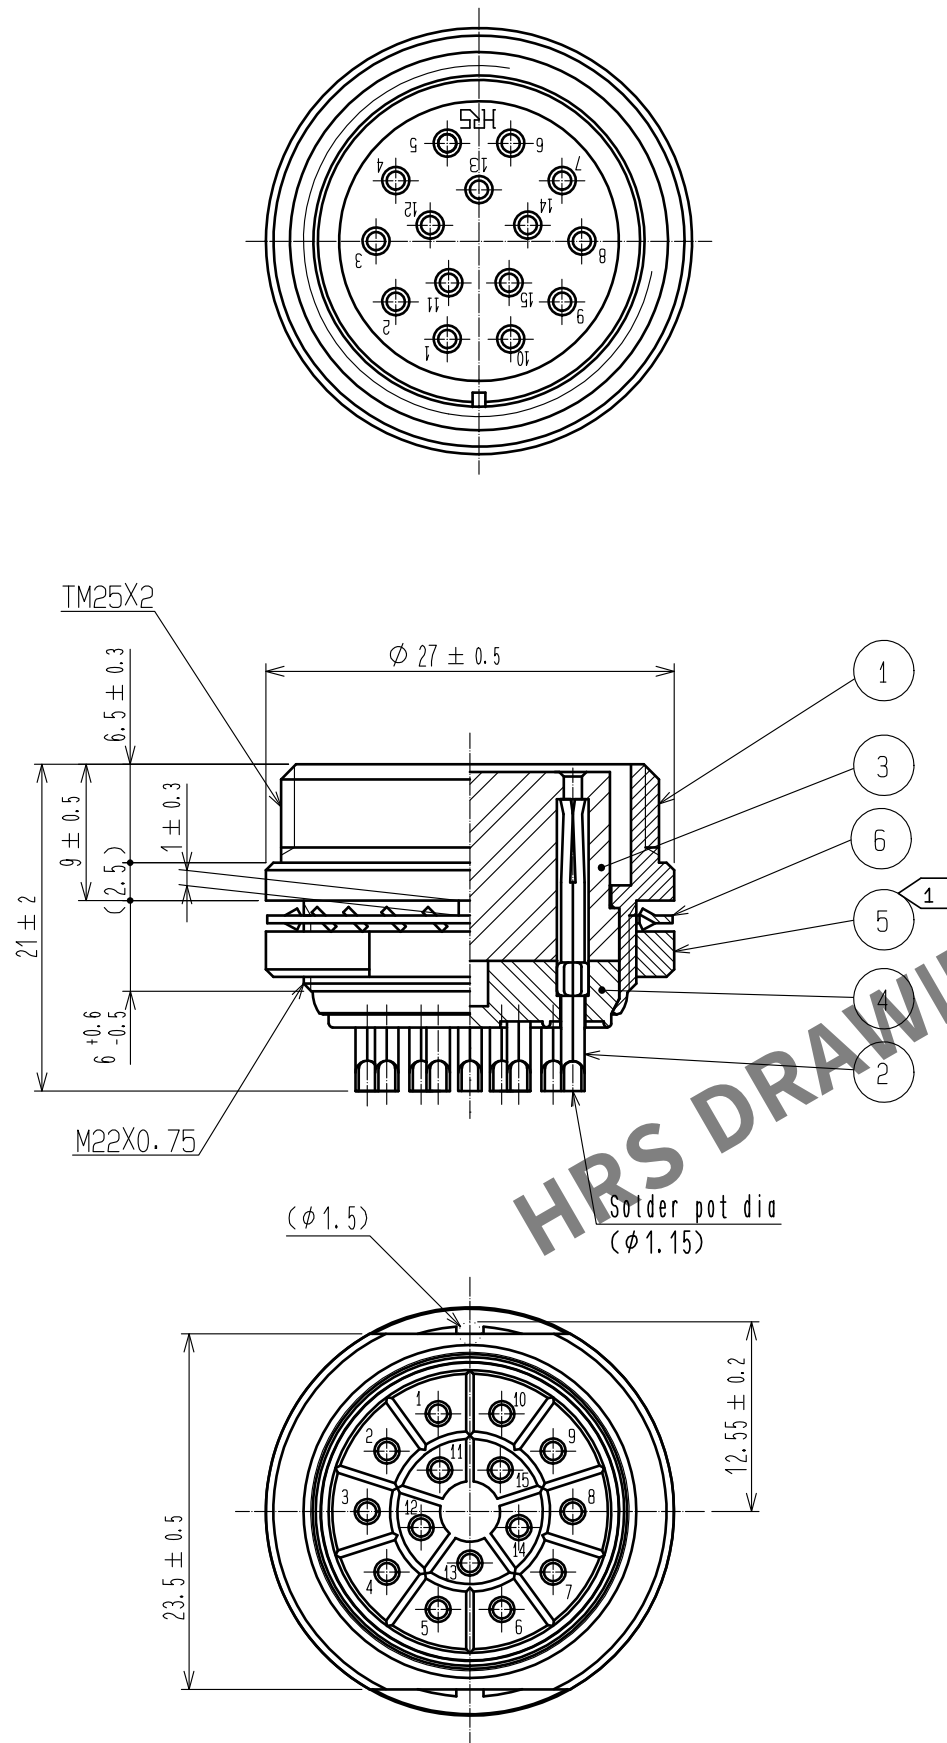


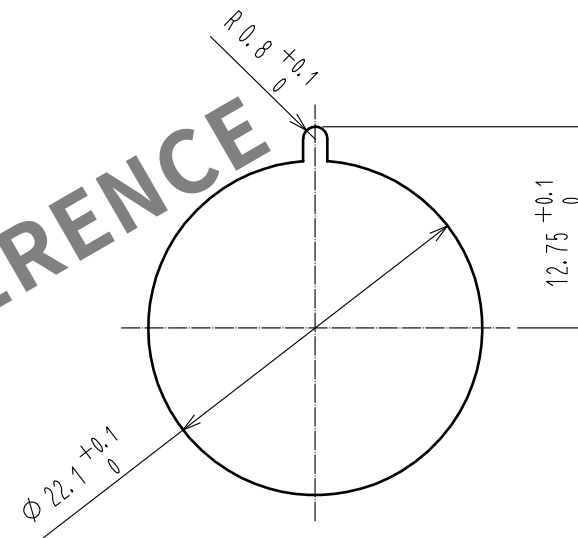

Panel cutout
(Panel thickness 2 max.)



Note 1 The recommended tighten torque of ref. No. ⑤ to be 4 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ret. No. ⑤ from loosening.

3	PPS	(BLACK) UL94V-0		6	PHOSPHOR BRONZE	NICKEL PLATING				
2	COPPER ALLOY	SILVER PLATING 5μm min.		5	BRASS	NICKEL PLATING				
1	BRASS	NICKEL PLATING		4	PPS	(BLACK) UL94V-0				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA		15.10.26		DRAWING NO.		EDC-003738-81-00		
		CHECKED : HY. KOBAYASHI		15.10.26		PART NO.		RM21TR-15S(81)		
		DESIGNED : KN. IKEHARA		15.10.26		CODE NO.		CL109-0327-6-81		
		DRAWN : KN. IKEHARA		15.10.26						