



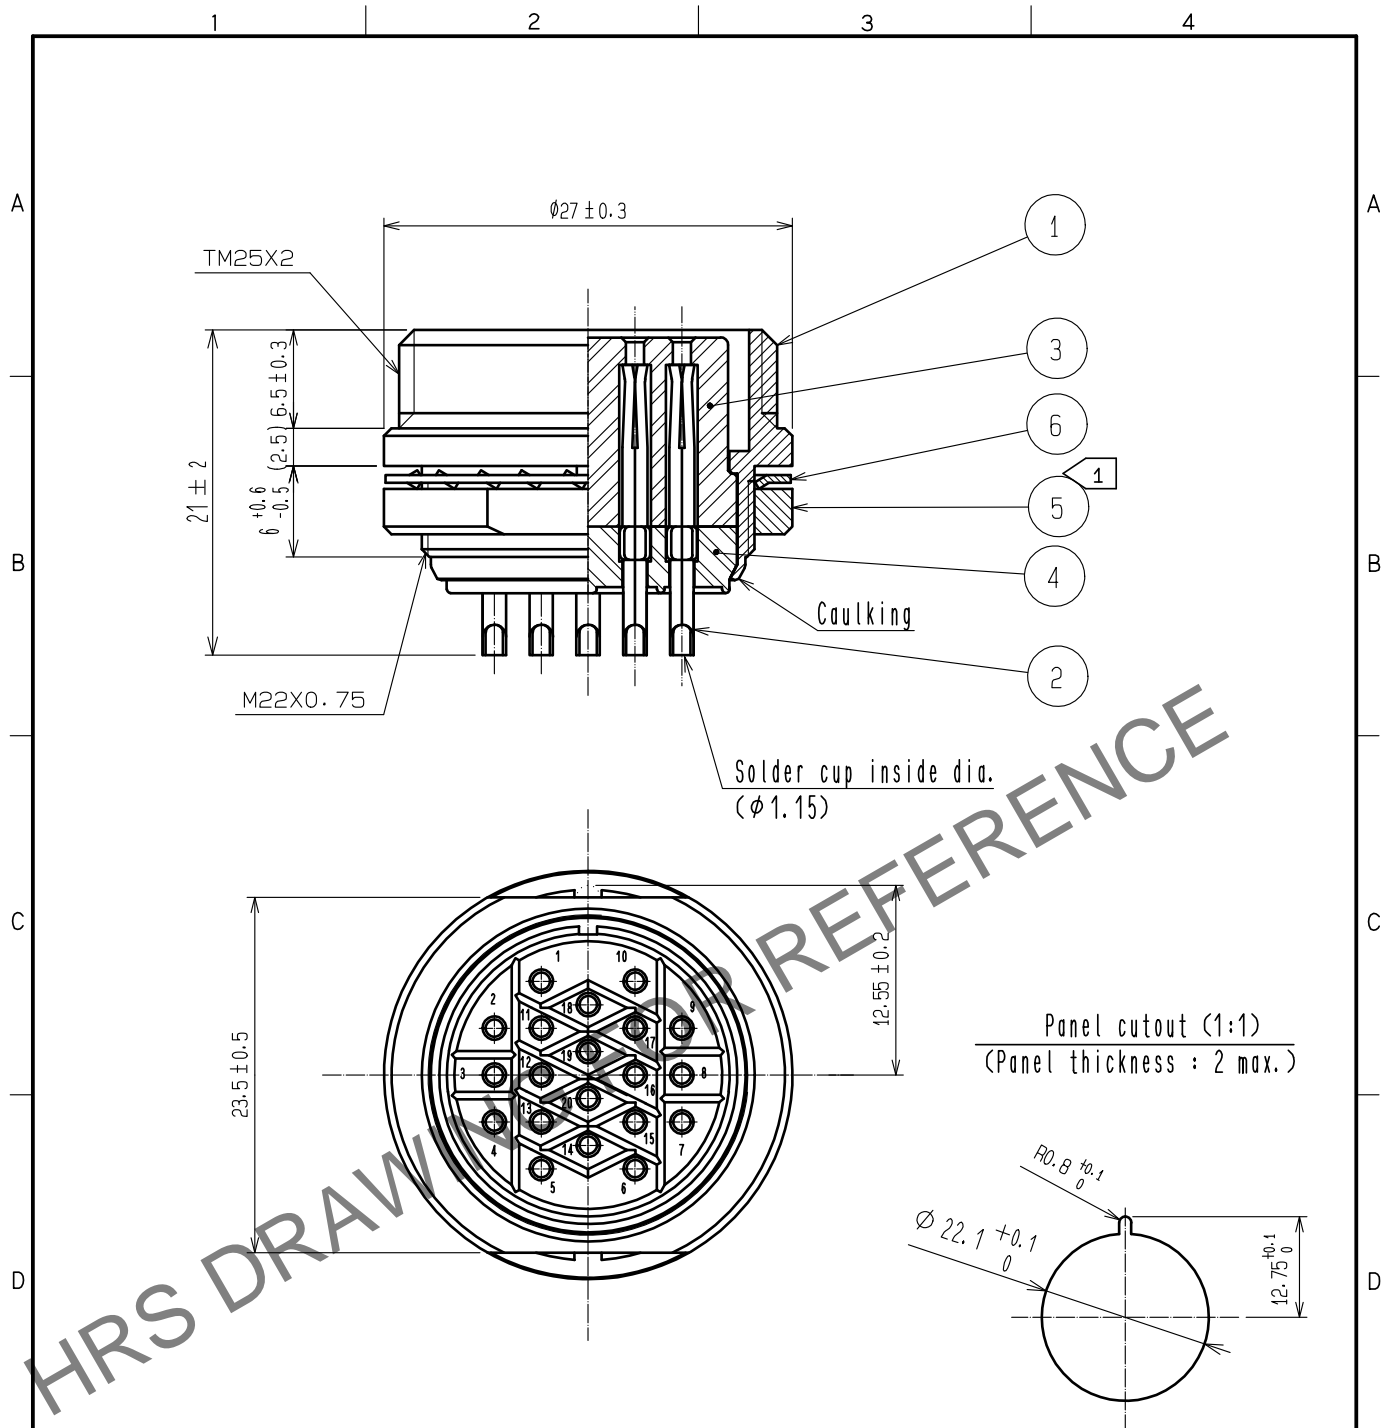

Mar.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Note ① The recommended tightening torque of ref. No. ⑤ : 4 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑤ from loosening.

3	PPS	(Black) UL94V-0	6	Phosphor bronze	Nickel plating					
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating					
1	Brass	Nickel plating	4	PPS	(Black) UL94V-0					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED :HY. KOBAYASHI		15.12.17	DRAWING NO.	EDC-003430-81-00		
				CHECKED :HY. KOBAYASHI		15.12.17	PART NO.	RM21TR-20S(81)		
				DESIGNED :KN. IKEHARA		15.12.17	CODE NO.	CL109-0328-9-81		
				DRAWN :KN. IKEHARA		15.12.17	