2.92mm ATTENUATORS


40 GHz 2 WATTS

SPECIFICATIONS:


11

12

Electrical:	
Frequency Range	DC - 40 GHz
Standard dB Values	3, 6, 10, 20, 30dB
Attenuation Accuracy: 3 & 6 dB	DC - 26.5 GHz 26.5 - 40 GHz ± 0.5 dB ± 0.8 dB
10, 20 & 30 dB	± 0.6 dB ± 1.0 dB
VSWR:	
DC - 18 GHz	1.30:1 Max.
	1.40:1 Max.
	2 Watts Avg @ 25° C
'	DERATED LINEARLY TO 0.1 WATTS @ +125°C
Impedance	50 Ohms
Mechanical:	
2.9mm Connectors	Passivated Stainless Steel
(Mate both Mechanically & Electrically with all SMA, K* & 3.5mm Series Connectors.)	
Conductors	Gold Plated Beryllium Copper

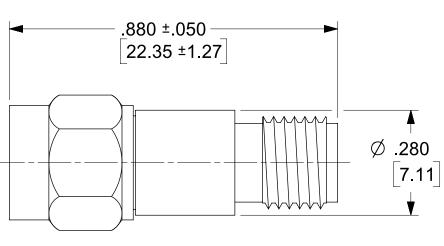


WITHOUT HEX

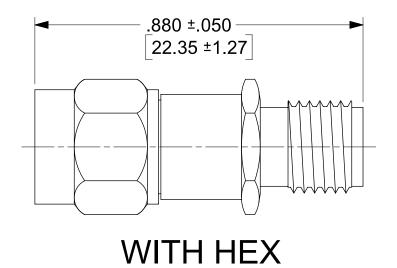

40 GHz 2 Watt 2.92mm

Molex Part Number	Configuration	With or Without Hex	dB
0732870320	Male/Female	Without	3dB
0732870321	Male/Female	With	3dB
0732870322	Male/Female	Without	6dB
0732870323	Male/Female	With	6dB
0732870324	Male/Female	Without	10dB
0732870325	Male/Female	With	10dB
0732870326	Male/Female	Without	20dB
0732870327	Male/Female	With	20dB
0732870328	Male/Female	Without	30dB
0732870329	Male/Female	With	30dB

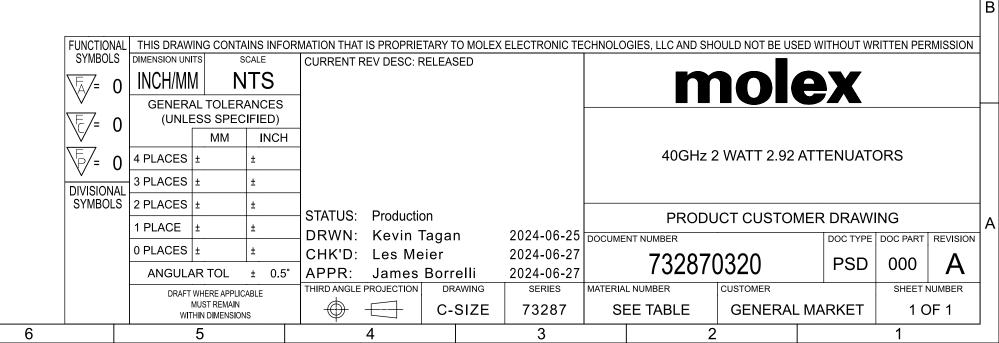

* K is a trademark of Anritsu/Wiltron Corp.