


Schottky Barrier Diode



SOD-323

Features:

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Negligible Reverse Recovery Time
- Low Reverse Capacitance
- Ultra-Small Surface Mount Package

Applications:

Schottky barrier switching

Maximum Rating @ T_A = 25°C unless otherwise specified

Parameter	Symbol	SD101AWS-7-F	Unit
Peak repetitive peak reverse voltage	V_{RRM}	60	V
Working peak	V_{RWM}		
DC reverse voltage	V_R		
RMS reverse voltage	$V_{R(RMS)}$	42	V
Forward continuous current	I_F	15	mA
Repetitive peak forward current @ t < 1.0s @ t = 10µs	I_{FRM}	50	mA
		2	A
Power dissipation	P_D	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	625	°C/W
Storage temperature	T_{stg}	-65 to +125	°C



Schottky Barrier Diode



Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse breakdown voltage	$V_{(BR)R}$	60			V	$I_R = 10\mu\text{A}$
Forward voltage	V_F			0.41 1	V	$I_F = 1\text{mA}$ $I_F = 15\text{mA}$
Reverse current	I_{RM}			0.2	μA	$V_R = 50\text{V}$
Capacitance between terminals	C_T			2	pF	$V_R = 0, f = 1\text{MHz}$
Reverse recovery time	t_{rr}			1	ns	$I_R = I_F = 5\text{mA}$ $I_{rr} = 0.1 * I_R, R_L = 100\Omega$

Typical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

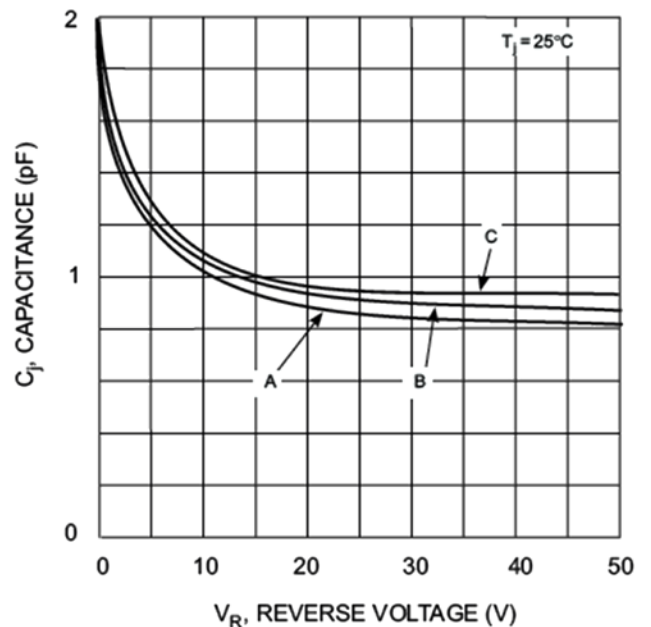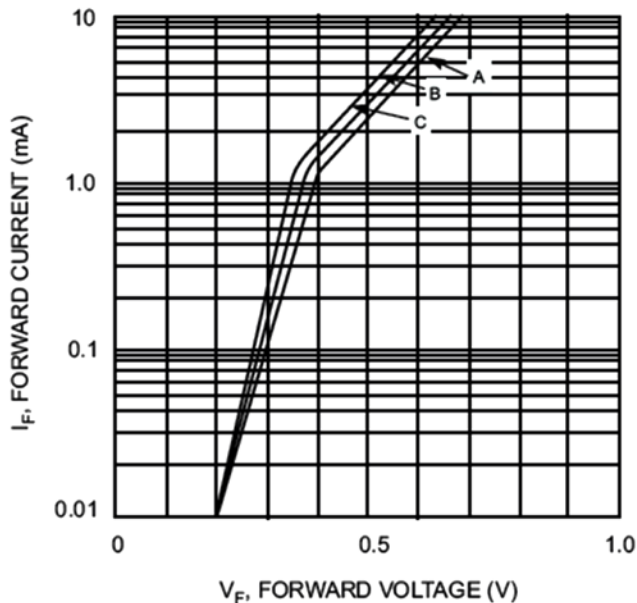


Schottky Barrier Diode




Package Outline

Plastic surface mounted package

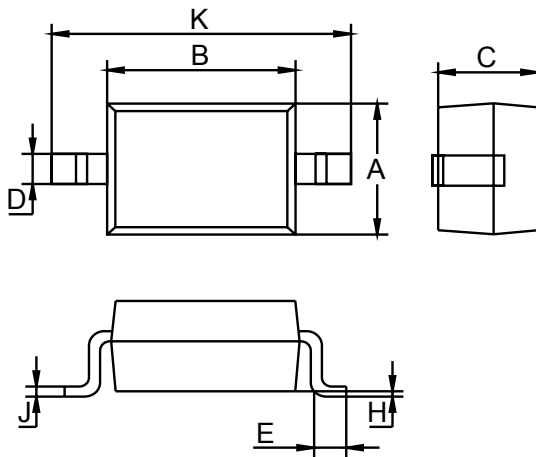

SOD-323		
Dim	MinM	ax
A	1.275	1.325
B1	.675 1	.725
C0	.9 Typical	
D	0.25 0	.35
E0	.27	0.37
H	0.02 0	.1
J0	.1 Typical	
K	2.62	.7
All Dimensions in mm		

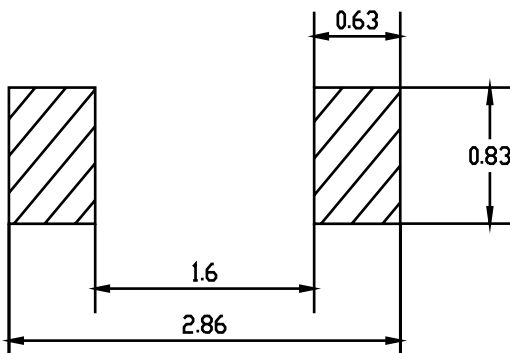

Dimensions : Millimetres

Package Information

Device	Package	Shipping
SD101AWS-7-F	SOD-323	3,000/Tape & Reel

Part Number Table

Description	Part Number
Schottky Barrier Diode	SD101AWS-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

