

E3FA/E3RA

- Large variety of standard and special types
- High power and visible red LED enabling easy alignment and long sensing distance
- Compact and robust housing for easy integration into machines
- Reliable operation in all industrial environments



Ordering Information

E3FA - Straight types [Refer to Dimensions on page 12.]

Red light









| Sensor type | Sensing distance | Connection method | Model | |
|---|-------------------------------|-------------------|--------------|--------------|
| | | | NPN output | PNP output |
| Through-beam ¹ | 20 m | pre-wired | E3FA-TN11 2M | E3FA-TP11 2M |
| | | M12 connector | E3FA-TN21 | E3FA-TP21 |
| Retro-reflective ² | 0.1 to 4 m with E39-R1S | pre-wired | E3FA-RN11 2M | E3FA-RP11 2M |
| | | M12 connector | E3FA-RN21 | E3FA-RP21 |
| Coaxial Retro-reflective ² | 0 to 500 mm with E39-R1S | pre-wired | E3FA-RN12 2M | E3FA-RP12 2M |
| | | M12 connector | E3FA-RN22 | E3FA-RP22 |
| Diffuse-reflective | 100 mm | pre-wired | E3FA-DN11 2M | E3FA-DP11 2M |
| | | M12 connector | E3FA-DN21 | E3FA-DP21 |
| | 300 mm | pre-wired | E3FA-DN12 2M | E3FA-DP12 2M |
| | | M12 connector | E3FA-DN22 | E3FA-DP22 |
| | 1 m | pre-wired | E3FA-DN13 2M | E3FA-DP13 2M |
| | | M12 connector | E3FA-DN23 | E3FA-DP23 |
| BGS (background suppression) | 100 mm | pre-wired | E3FA-LN11 2M | E3FA-LP11 2M |
| | | M12 connector | E3FA-LN21 | E3FA-LP21 |
| | 200 mm | pre-wired | E3FA-LN12 2M | E3FA-LP12 2M |
| | | M12 connector | E3FA-LN22 | E3FA-LP22 |
| Limited distance reflective | 10 to 50 mm | pre-wired | E3FA-VN11 2M | E3FA-VP11 2M |
| | | M12 connector | E3FA-VN21 | E3FA-VP21 |
| Transparent detected with P-opaquing function ² | 100 to 500 mm with E39-RP1 | pre-wired | E3FA-BN11 2M | E3FA-BP11 2M |
| | | M12 connector | E3FA-BN21 | E3FA-BP21 |
| Transparent detected with P-opaquing function ² | 0.1 to 2 m with E39-RP1 | pre-wired | E3FA-BN12 2M | E3FA-BP12 2M |
| | | M12 connector | E3FA-BN22 | E3FA-BP22 |

¹ Includes the emitter and receiver.

² The Reflector is sold separately. Select the Reflector model most suited to the application.

E3RA - Radial types *[Refer to Dimensions on page 12.]*

 Red light



| Sensor type | Sensing distance | Connection method | Model | |
|--|--|-------------------|--------------|--------------|
| | | | NPN output | PNP output |
| Through-beam ¹  |  15 m | pre-wired | E3RA-TN11 2M | E3RA-TP11 2M |
| | | M12 connector | E3RA-TN21 | E3RA-TP21 |
| Retro-reflective ²  |  0.1 to 3 m with E39-R1S | pre-wired | E3RA-RN11 2M | E3RA-RP11 2M |
| | | M12 connector | E3RA-RN21 | E3RA-RP21 |
| Diffuse reflective  |  100 mm | pre-wired | E3RA-DN11 2M | E3RA-DP11 2M |
| | | M12 connector | E3RA-DN21 | E3RA-DP21 |
| |  300 mm | pre-wired | E3RA-DN12 2M | E3RA-DP12 2M |
| | | M12 connector | E3RA-DN22 | E3RA-DP22 |
| |  700 mm | pre-wired | E3RA-DN13 2M | E3RA-DP13 2M |
| | | M12 connector | E3RA-DN23 | E3RA-DP23 |

¹ Includes the emitter and receiver.

² The Reflector is sold separately. Select the Reflector model most suited to the application.



Reflectors *[Refer to Dimensions on page 13.]*

Reflectors required for Retro-reflective Sensors: A Reflector is not provided with the Sensor. Be sure to order a Reflector separately.

| Sensor | Sensing distance | Appearance | Model | Quantity | Remarks |
|----------|------------------|---|---------|----------|-------------------------|
| E3FA-R□1 | 0.1 to 4 m |  | E39-R1S | 1 | for E3FA-R□ and E3RA-R□ |
| E3FA-R□2 | 0 to 500 mm | | | | |
| E3FA-B□1 | 100 to 500 mm |  | E39-RP1 | 1 | for E3FA-B□ |
| E3FA-B□2 | 0.1 to 2 m | | | | |



Mounting brackets *[Refer to Dimensions on page 13.]*

A Mounting Bracket is not enclosed with the Sensor. Order a Mounting Bracket separately if required.

| Sensor | Appearance | Model (Material) | Quantity | Remarks |
|-----------|---|-------------------|----------|------------------------|
| all types |  | E39-L183 (SUS304) | 1 | Mounting bracket |
| |  | E39-L182 (POM) | 1 | Flush mounting bracket |

Sensor I/O connectors

Models for Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.

| Sensor | Size | Cable | Appearance | Cable type | Model |
|---------------------|------|----------|--|------------|--------------------|
| M12 connector types | M12 | Standard | Straight  | 2 m | XS2F-M12PVC4S2M-EU |
| | | | | 5 m | XS2F-M12PVC4S5M-EU |
| | | | Angle  | 2 m | XS2F-M12PVC4A2M-EU |
| | | | | 5 m | XS2F-M12PVC4A5M-EU |

Specifications

Straight type


| Model | Sensing method | | Through-beam | Retro-reflective | Coaxial Retro-reflective | Diffuse-reflective | | |
|--------------------------------------|----------------------|---|--|---------------------------------------|-------------------------------|---|---|--|
| | NPN output | Pre-wired M12 Connector | E3FA-TN11 2M | E3FA-RN11 2M | E3FA-RN12 2M | E3FA-DN11 2M | E3FA-DN12 2M | E3FA-DN13 2M |
| Item | PNP output | Pre-wired M12 Connector | E3FA-TP11 2M | E3FA-RP11 2M | E3FA-RP12 2M | E3FA-DP11 2M | E3FA-DP12 2M | E3FA-DP13 2M |
| | | | E3FA-TP21 | E3FA-RP21 | E3FA-RP22 | E3FA-DP21 | E3FA-DP22 | E3FA-DP23 |
| Sensing distance | | | 20 m | 0.1 to 4 m (with E39-R1S) | 0 to 500 mm (with E39-R1S) | 100 mm (white paper: 300 × 300 mm) | 300 mm (white paper: 300 × 300 mm) | 1 m (white paper: 300 × 300 mm) |
| Spot diameter (typical) | | | — | — | — | 40 × 45 mm Sensing distance of 100 mm | 40 × 50 mm Sensing distance of 300 mm | 120 × 150 mm Sensing distance of 1 m |
| Standard sensing object | | | Opaque: 7 mm dia.min. | Opaque: 75 mm dia.min. | Opaque: 75 mm dia.min. | — | — | — |
| Differential travel | | | — | — | — | 20% max. | — | — |
| Directional angle | | | 2° min. | 2° min. | 2° min. | — | — | — |
| Light source (wavelength) | | | Red LED (624 nm) | | | | | |
| Power supply voltage | | | 10 to 30 VDC (include voltage ripple of 10%(p-p) max.) | | | | | |
| Current consumption | | | 40 mA max. (Emitter 25 mA max. Receiver 15 mA max.) | 25 mA max. | | | | |
| Control output | | | NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max. | | | | | |
| Operation mode | | | Light-ON/Dark-ON selectable by wiring | | | | | |
| Indicator | | | Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam | | | | | |
| Protection circuits | | | Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection | | | | | |
| Response time | | | 0.5 ms | | | | | |
| Sensitivity adjustment | | | One-turn adjuster | | | | | |
| Ambient illumination (Receiver side) | | | Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max. | | | | | |
| Ambient temperature range | | | Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation) | | | | | |
| Ambient humidity range | | | Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation) | | | | | |
| Insulation resistance | | | 20 MΩ min. at 500 VDC | | | | | |
| Dielectric strength | | | 1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case | | | | | |
| Vibration resistance | | | Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions | | | | | |
| Shock resistance | | | Destruction: 500 m/s ² 3 times each in X, Y and Z directions | | | | | |
| Degree of protection | | | IEC: IP67, DIN 40050-9: IP69K * | | | | | |
| Weight (packed state/only sensor) | Pre-wired cable (2M) | Approx. 110 g/ Approx. 50 g, respectively | Approx. 60 g/ Approx. 50 g | | | | | |
| | Connector | Approx. 30 g/ Approx. 10 g, respectively | Approx. 20 g/ Approx. 10 g | | | | | |
| Material | Case | ABS | | | | | | |
| | Lens and Display | PMMA | | | | | | |
| | Adjuster | POM | | | | | | |
| | Nut | ABS | | | | | | |
| Accessories | | | Instruction sheet M18 nuts (4 pcs) | Instruction sheet M18 nuts (2 pcs) | | | | |

* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.




| Model | Sensing method | | BGS (Background suppression) | | Limited distance reflective | Transparent detected with P-opaquiring function | |
|--------------------------------------|----------------------|----------------------------|--|---|---|---|------------------------------------|
| | NPN output | Pre-wired M12 Connector | E3FA-LN11 2M | E3FA-LN12 2M | E3FA-VN11 2M | E3FA-BN11 2M | E3FA-BN12 2M |
| Item | PNP output | Pre-wired M12 Connector | E3FA-LP11 2M | E3FA-LP12 2M | E3FA-VP11 2M | E3FA-BP11 2M | E3FA-BP12 2M |
| | | | E3FA-LP21 | E3FA-LP22 | E3FA-VP21 | E3FA-BP21 | E3FA-BP22 |
| Sensing distance | | | 100 mm (white paper: 300 × 300 mm) | 200 mm (white paper: 300 × 300 mm) | 10 to 50 mm (glass(t = 1.0 mm): 150 × 150 mm) | 100 to 500 mm (with E39-RP1) | 0.1 to 2 m (with E39-RP1) |
| Spot diameter (typical) | | | 10 × 10 mm Sensing distance of 100 mm | 10 × 15 mm Sensing distance of 200 mm | 10 × 10 mm Sensing distance of 50 mm | — | — |
| Standard sensing object | | | — | — | — | glass(t = 1.0 mm): 150 × 150 mm | glass(t = 1.0 mm): 150 × 150 mm |
| Differential travel | | | 20% max. | | — | — | — |
| Directional angle | | | — | — | — | — | — |
| Light source (wavelength) | | | Red LED (624 nm) | | | | |
| Power supply voltage | | | 10 to 30 VDC (include voltage ripple of 10%(p-p) max.) | | | | |
| Current consumption | | | 25 mA max. | | | | |
| Control output | | | NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max. | | | | |
| Operation mode | | | Light-ON/Dark-ON selectable by wiring | | | | |
| Indicator | | | Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam | | | | |
| Protection circuits | | | Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection | | | | |
| Response time | | | 0.5 ms | | | | |
| Sensitivity adjustment | | | Fixed | One-turn adjuster | | | |
| Ambient illumination (Receiver side) | | | Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max. | | | | |
| Ambient temperature range | | | Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation) | | | | |
| Ambient humidity range | | | Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation) | | | | |
| Insulation resistance | | | 20 MΩ min. at 500 VDC | | | | |
| Dielectric strength | | | 1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case | | | | |
| Vibration resistance | | | Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions | | | | |
| Shock resistance | | | Destruction: 500 m/s ² 3 times each in X, Y and Z directions | | | | |
| Degree of protection | | | IEC: IP67, DIN 40050-9: IP69K * | | | | |
| Weight (packed state/only sensor) | Pre-wired cable (2M) | | Approx. 60 g/ Approx. 50 g | | | | |
| | Connector | | Approx. 20 g/ Approx. 10 g | | | | |
| Material | Case | | ABS | | | | |
| | Lens and Display | | PMMA | | | | |
| | Adjuster | | POM | | | | |
| | Nut | | ABS | | | | |
| Accessories | | | Instruction sheet M18 nuts (2 pcs) | | | | |

* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



Radial type


| Model | Sensing method | | Through-beam | Retro-reflective | Diffuse-reflective | | |
|--------------------------------------|----------------------|----------------------------|--|---------------------------------------|---|---|--|
| | NPN output | Pre-wired M12 Connector | E3RA-TN11 2M | E3RA-RN11 2M | E3RA-DN11 2M | E3RA-DN12 2M | E3RA-DN13 2M |
| Item | PNP output | Pre-wired | E3RA-TP11 2M | E3RA-RP11 2M | E3RA-DP11 2M | E3RA-DP12 2M | E3RA-DP13 2M |
| | | M12 Connector | E3RA-TP21 | E3RA-RP21 | E3RA-DP21 | E3RA-DP22 | E3RA-DP23 |
| Sensing distance | | | 15 m | 0.1 to 3 m (with E39-R1S) | 100 mm (white paper: 300 × 300 mm) | 300 mm (white paper: 300 × 300 mm) | 700 mm (white paper: 300 × 300 mm) |
| Spot diameter (typical) | | | — | — | 35 × 40 mm Sensing distance of 100 mm | 40 × 45 mm Sensing distance of 300 mm | 90 × 120 mm Sensing distance of 700 mm |
| Standard sensing object | | | Opaque: 7 mm dia.min. | Opaque: 75 mm dia.min. | — | — | — |
| Differential travel | | | — | — | 20% max. | | |
| Directional angle | | | 2° min. | 2° min. | — | — | — |
| Light source (wavelength) | | | Red LED (624 nm) | | | | |
| Power supply voltage | | | 10 to 30 VDC (include voltage ripple of 10%(p-p) max.) | | | | |
| Current consumption | | | 40mA max. (Emitter 25 mA max. Receiver 15 mA max.) | 25 mA max. | | | |
| Control output | | | NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 2 V max.), Load power supply voltage: 30 VDC max. | | | | |
| Operation mode | | | Light-ON/Dark-ON selectable by wiring | | | | |
| Indicator | | | Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam | | | | |
| Protection circuits | | | Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection | | | | |
| Response time | | | 0.5 ms | | | | |
| Sensitivity adjustment | | | One-turn adjuster | | | | |
| Ambient illumination (Receiver side) | | | Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max. | | | | |
| Ambient temperature range | | | Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation) | | | | |
| Ambient humidity range | | | Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation) | | | | |
| Insulation resistance | | | 20 MΩ min. at 500 VDC | | | | |
| Dielectric strength | | | 1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case | | | | |
| Vibration resistance | | | Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions | | | | |
| Shock resistance | | | Destruction: 500 m/s ² 3 times each in X, Y and Z directions | | | | |
| Degree of protection | | | IEC: IP67, DIN 40050-9: IP69K * | | | | |
| Weight (packed state/only sensor) | Pre-wired cable (2M) | | Approx. 110 g/ Approx. 50 g, respectively | Approx. 60 g/ Approx. 50 g | | | |
| | Connector | | Approx. 30 g/ Approx. 10 g, respectively | Approx. 20 g/ Approx. 10 g | | | |
| Material | Case | | ABS | | | | |
| | Lens and Display | | PMMA | | | | |
| | Adjuster | | POM | | | | |
| | Nut | | ABS | | | | |
| Accessories | | | Instruction sheet M18 nuts (4 pcs) | Instruction sheet M18 nuts (2 pcs) | | | |

* IP69K Degree of Protection Specifications

IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.

The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.

The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.




Engineering Data (Typical)

Parallel Operating Range


Through-beam Models

E3FA-T□□, E3RA-T□□

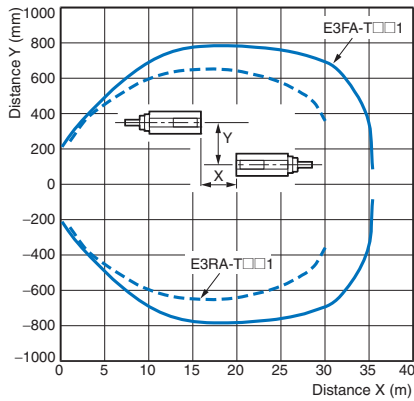


Retro-reflective Models

E3FA-R□□1, E3RA-R□□1

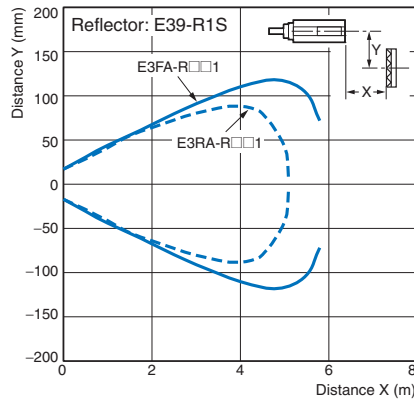


E3FA-R□□2

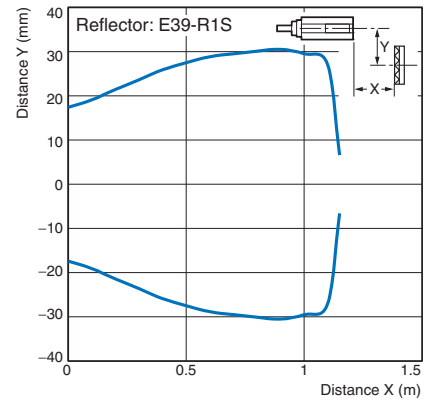


Transparent detected with P-opaque function

E3FA-B□□1

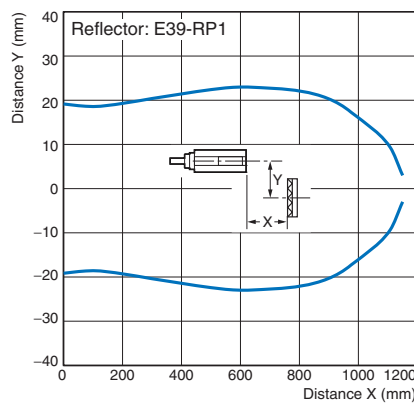

E3FA-B□□2

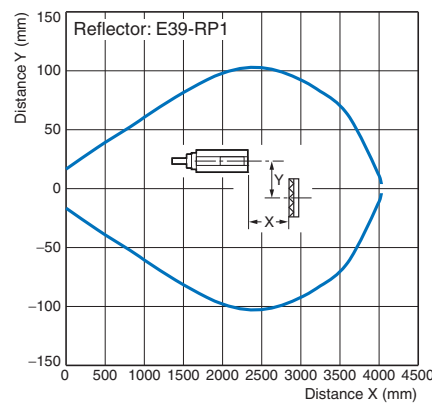


Operating Range


Diffuse-reflective Models

E3FA-D□□1, E3FA-D□□2

E3RA-D□□1, E3RA-D□□2

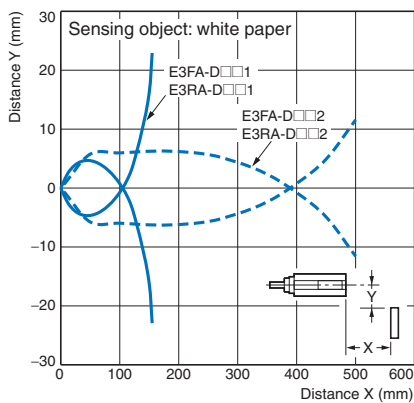


E3FA-D□□3, E3RA-D□□3

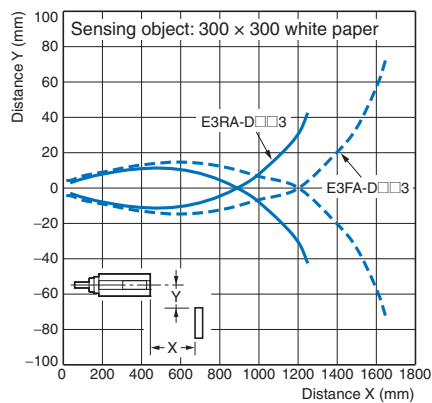


BGS Models

E3FA-L□□1

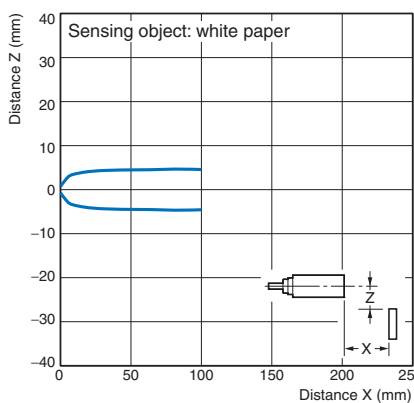


E3FA-L□□2

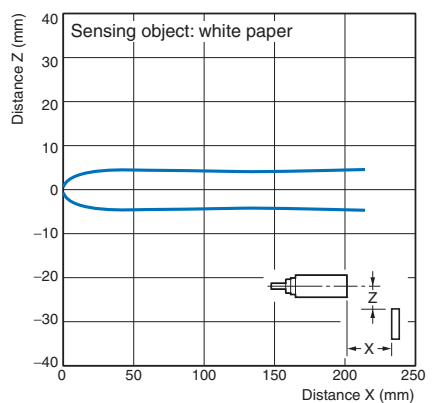

Limited distance reflective


E3FA-V□□

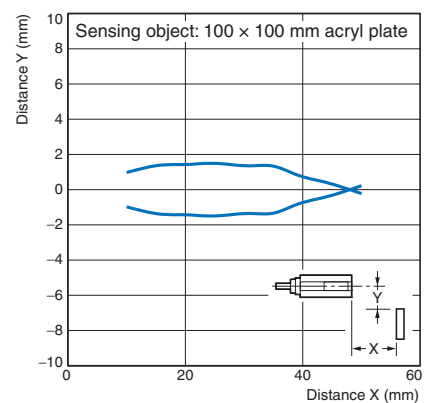

Excess Gain vs. Distance


Through-beam Models

E3FA-T□, E3RA-T□

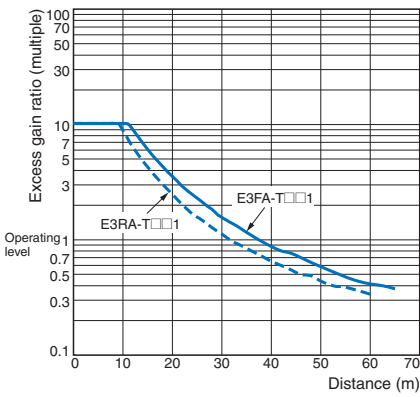


Retro-reflective Models

E3FA-R□1, E3RA-R□1

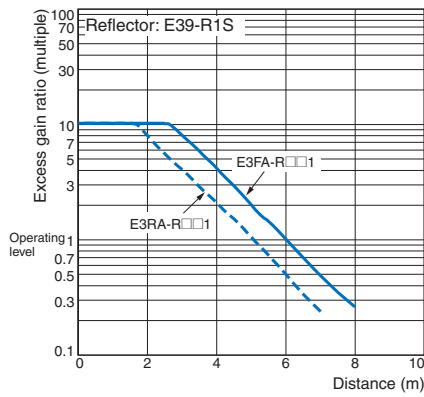


E3FA-R□2

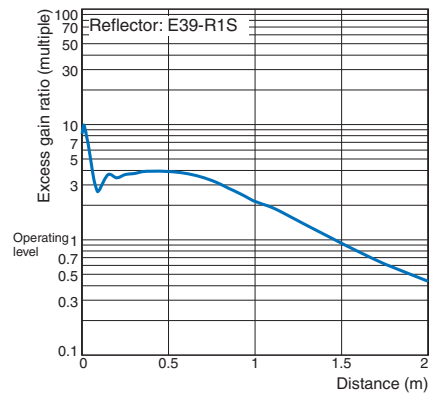


Diffuse reflective Models

E3FA-D□1, E3FA-D□2

E3RA-D□1, E3RA-D□2

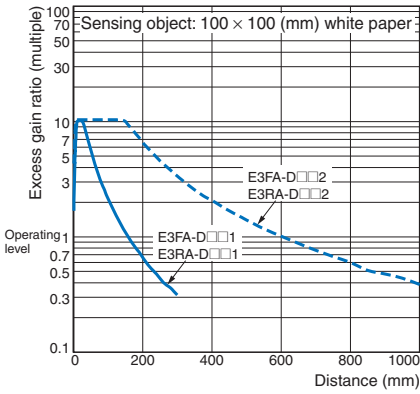


E3FA-D□3, E3RA-D□3

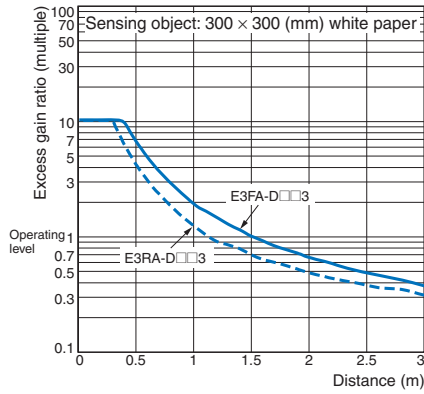


Transparent detected with P-opaquiring function

E3FA-B□1

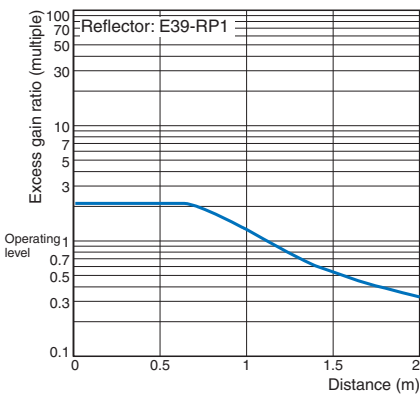


E3FA-B□2

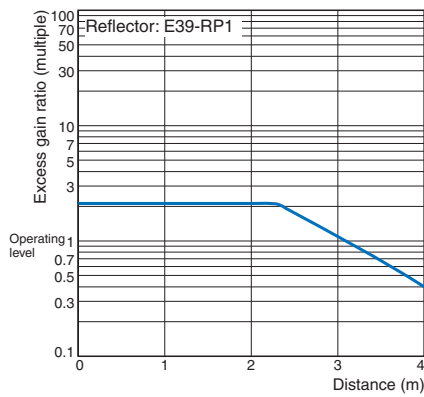

Limited distance reflective

E3FA-V□

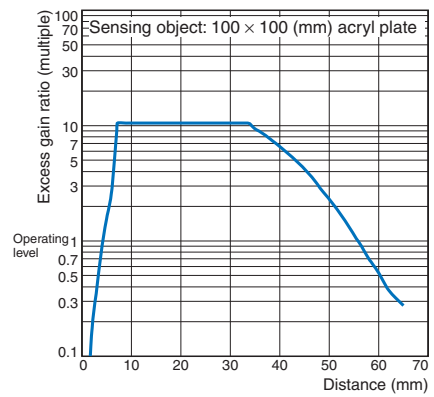


Sensing Object Size vs. Distance


Diffuse reflective Models

E3FA-D□1, E3FA-D□2

E3RA-D□1, E3RA-D□2

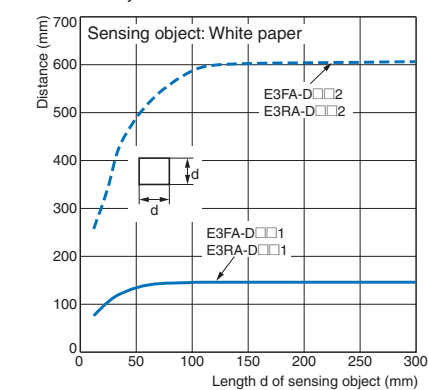


E3FA-D□3, E3RA-D□3

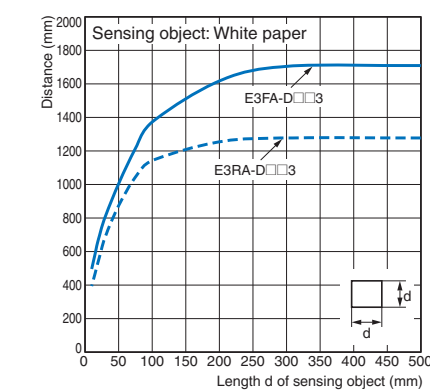


Sensing Distance vs. Sensing Object Material

BGS Models

E3FA-L□1

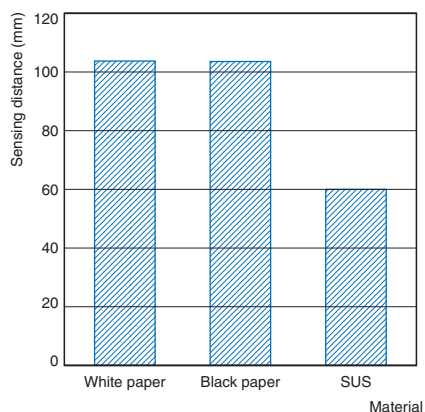


E3FA-L□2

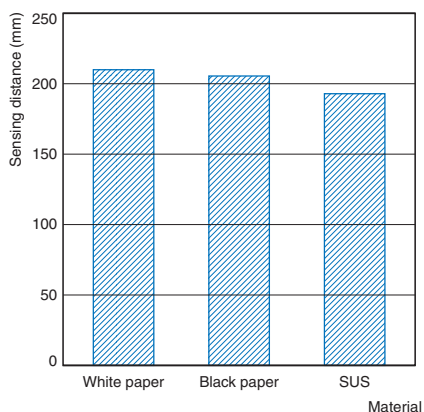


Dark Excess Gain vs. Sensing Object Characteristics

Transparent detected with P-opaquist function

E3FA-B□1

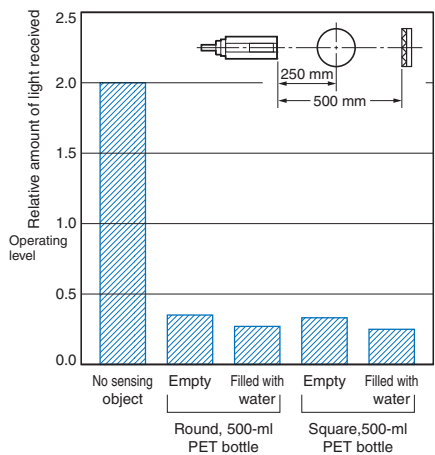

E3FA-B□2

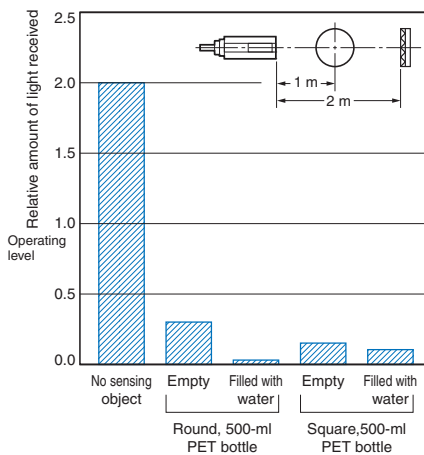

Output circuit diagram

PNP Output

| Model | Operation mode | Timing charts | Operation selector | Output circuit |
|--|----------------|---------------|--|--|
| E3FA-TP□ E3FA-RP□ E3FA-DP□ E3FA-VP□ E3FA-BP□ E3RA-TP□ E3RA-RP□ E3RA-DP□ | Light-ON | | Connect the pink wire (Pin(2)) to the brown (Pin(1)) | Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaqing function. |
| | Dark-ON | | Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2)) | |
| Through-beam Emitter | | | | |
| E3FA-LP□ | Light-ON | | Connect the pink wire (Pin(2)) to the brown (Pin(1)) | Background suppression. |
| | Dark-ON | | Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2)) | |

NPN Output

| Model | Operation mode | Timing charts | Operation selector | Output circuit |
|--|----------------|--|---|--|
| E3FA-TN□ E3FA-RN□ E3FA-DN□ E3FA-VN□ E3FA-BN□ E3RA-TN□ E3RA-RN□ E3RA-DN□ | Light-ON | Light incident: ON Light interrupted: OFF Operation indicator (orange): ON Output transistor: ON Load (e.g., relay): Operate Reset: OFF (Between brown and black leads) | Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2)) | Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaqing function. |
| | Dark-ON | Light incident: ON Light interrupted: OFF Operation indicator (orange): OFF Output transistor: ON Load (e.g., relay): Operate Reset: OFF (Between brown and black leads) | Connect the pink wire (Pin(2)) to the blue (Pin(3)) | |
| Through-beam Emitter | | | | |
| E3FA-LN□ | Light-ON | NEAR FAR Operation indicator (orange): ON OFF Output transistor: ON OFF Load (e.g., relay): Operate Reset: OFF (Between brown and black leads) | Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2)) | Background suppression. |
| | Dark-ON | NEAR FAR Operation indicator (orange): ON OFF Output transistor: ON OFF Load (e.g., relay): Operate Reset: OFF (Between brown and black leads) | Connect the pink wire (Pin(2)) to the blue (Pin(3)) | |


Connector Pin Arrangement

M12 Connector Pin Arrangement



Connectors (Sensor I/O connectors)

M12 4-wire Connectors

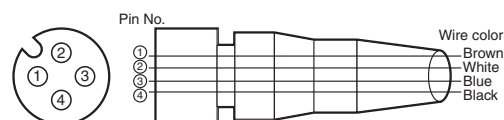

| Classification | Wire color | Connector pin No. | Application |
|----------------|------------|-------------------|------------------------|
| DC | Brown | ① | Power supply (+V) |
| | White | ② | L/on · D/on selectable |
| | Blue | ③ | Power supply (0 V) |
| | Black | ④ | Output |

Nomenclature

Straight

with an adjuster:

E3FA-T□-D

E3FA-R□

E3FA-D□

E3FA-V□

E3FA-B□

without an adjuster:

E3FA-T□-L *

E3FA-L□

Stability indicator
(Green)



Sensitivity adjuster

Operation indicator
(Orange)

Radial

with an adjuster:

E3RA-T□-D


E3RA-R□

E3RA-D□

without an adjuster:

E3RA-T□-L *

Stability indicator
(Green)

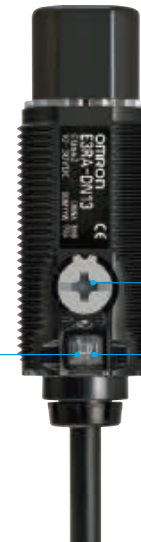

Sensitivity adjuster

Operation indicator
(Orange)

* The Emitter has two Power indicators (Green) instead of the Stability indicator (Green) and the Operation indicator (Orange).

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

WARNING

This product is not designed or rated for directly or indirectly ensuring safety of persons. Do not use it for such a purpose.



CAUTION

Never use the product with an AC power supply.
Do not use the product with voltage in excess of the rated voltage.



Do not use the product with incorrect wiring.
Otherwise, explosion, fire, malfunction may result.



Precautions for Safe Use

Be sure to follow the safety precautions below for added safety.

1. Do not use the sensor under the environment with explosive, flammable or corrosive gas.
2. Do not use the sensor under the oil or chemical environment.
3. Do not use the sensor in the water, rain or outdoors.
4. Do not use the sensor in the environment where humidity is high and condensation may occur.
5. Do not use the sensor under the environment under the other conditions in excess of rated.
6. Do not use the sensor in place that is exposed by direct sunlight.
7. Do not use the sensor in place where the sensor may receive direct vibration or shock.
8. Do not use the thinner, alcohol, or other organic solvents.
9. Never disassemble, repair nor tamper with the sensor.
10. Please process it as industrial waste.

Precautions for Correct Use

1. Laying Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in malfunction or damage due to conduit or use shielded cable.
2. Do not pull on the cable with excessive force.
3. If a commercial switching regulator is used, ground the FG (frame ground) terminal.
4. The sensor will be available 100 ms after the power supply is tuned ON. Start to use the sensor 100 ms or more after turning ON the power supply. If the load and the sensor are connected to separate power supplies, be sure to turn ON the sensor first.
5. Output pulses may be generated even when the power supply is OFF. Therefore, it is recommended to first turn OFF the power supply for the load or the load line.
6. The sensor must be mounted using the provided nuts. The proper tightening torque range is between 0.4 and 0.5 N·m.


Dimensions

Sensors

E3FA series

Pre-wired Models


- E3FA-T□11
- E3FA-R□1□
- E3FA-D□1□
- E3FA-L□1□
- E3FA-V□11
- E3FA-B□1□

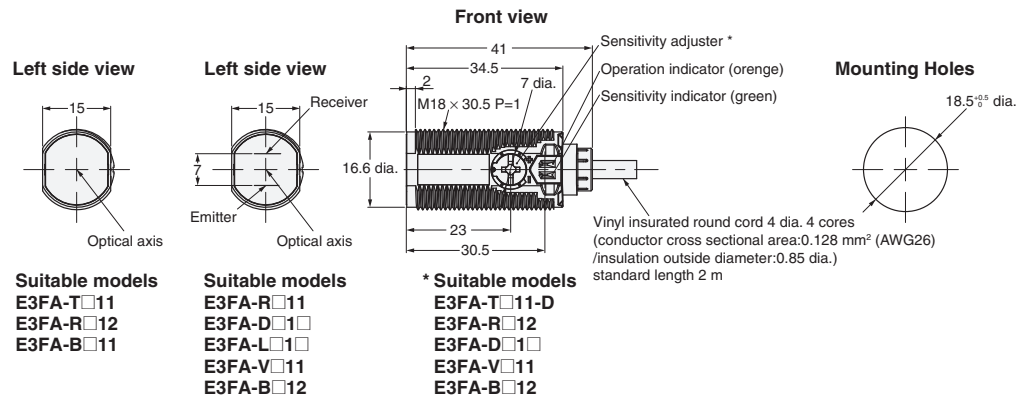

E3FA series

M12 Connector Models


- E3FA-T□21
- E3FA-R□2□
- E3FA-D□2□
- E3FA-L□2□
- E3FA-V□21
- E3FA-B□2□

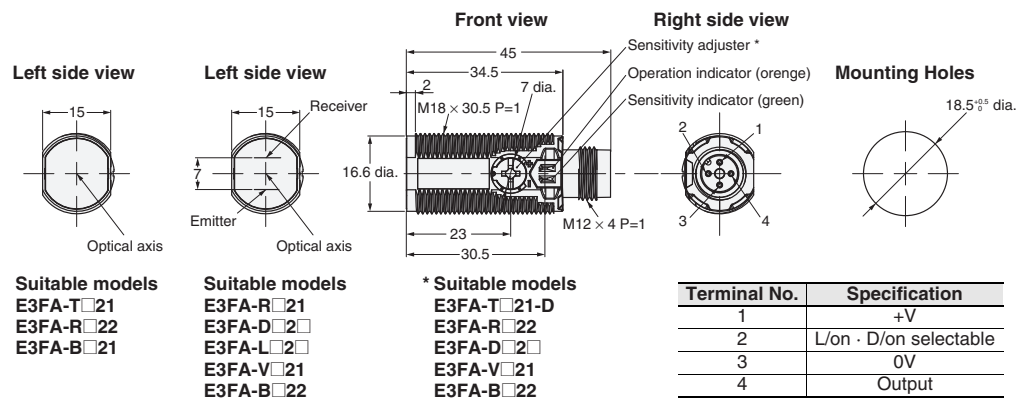

E3RA series

Pre-wired Models


- E3RA-T□11
- E3RA-R□11
- E3RA-D□1□

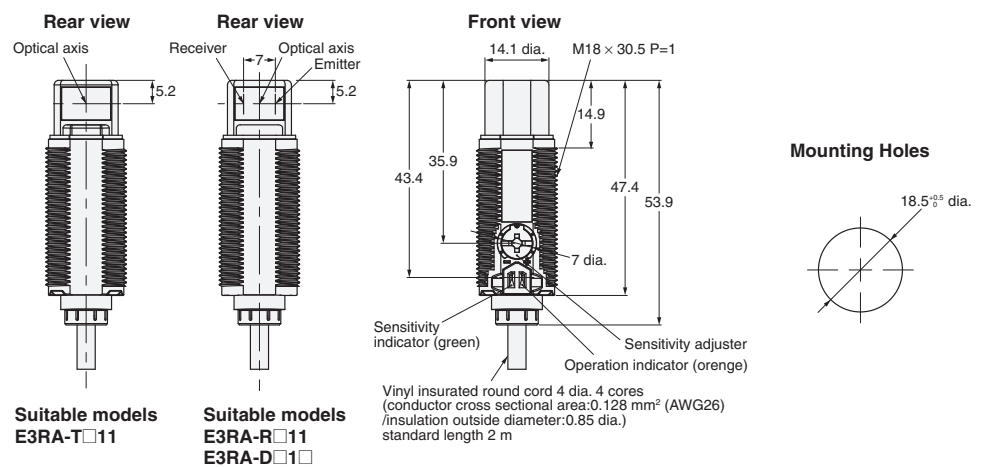


E3RA series

M12 Connector Models

- E3RA-T□21
- E3RA-R□21
- E3RA-D□2□

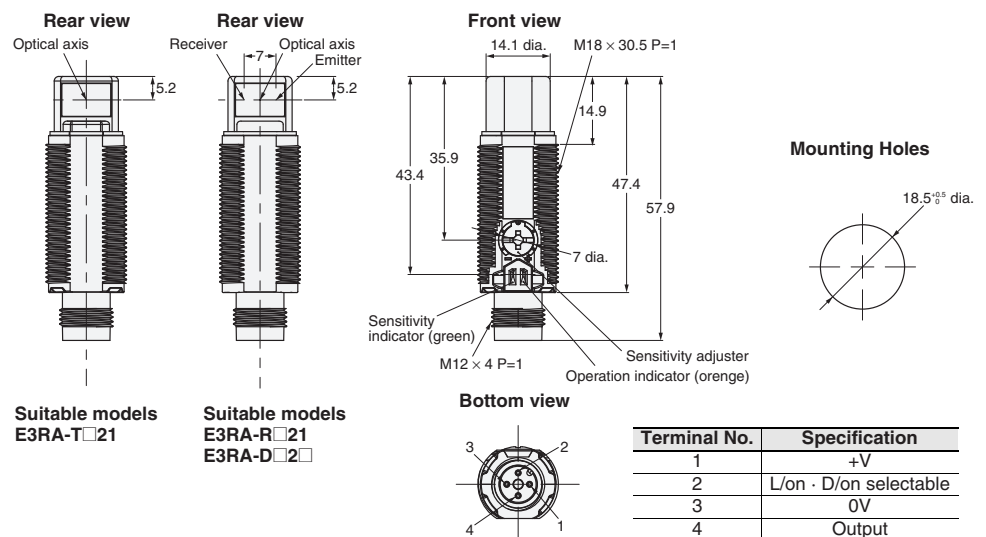


Attached nut

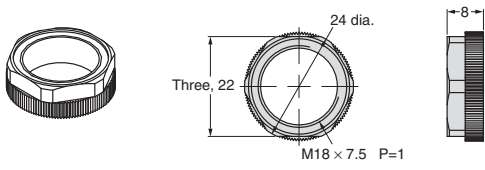


Accessories (Order Separately)

Reflectors

E39-R1S

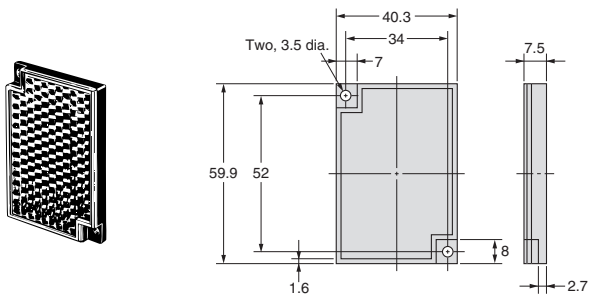


E39-RP1

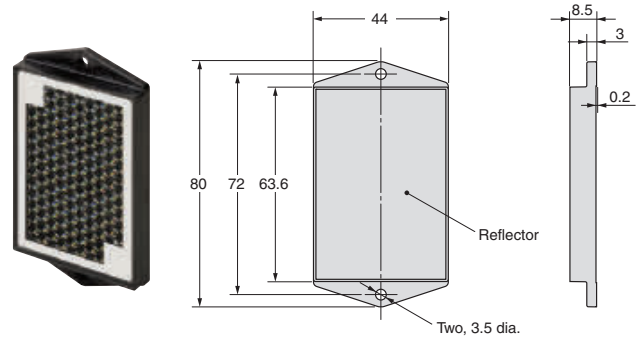


Mounting brackets

E39-L183

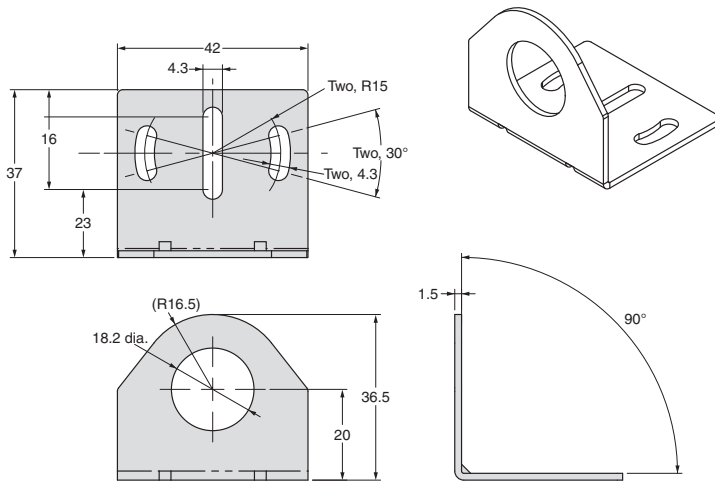

Mounting brackets

E39-L182

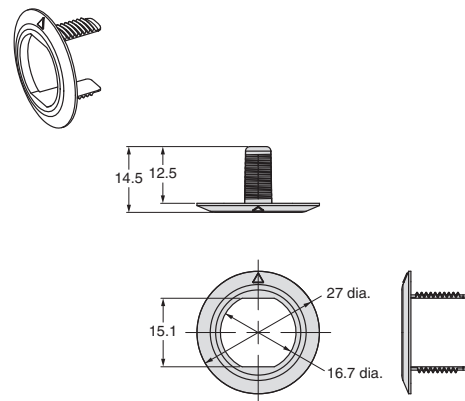

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

Cat. No. E93E-EN-01

In the interest of product improvement, specifications are subject to change without notice.

OMRON EUROPE B.V.

Wegalaan 67-69,
NL-2132 JD, Hoofddorp,
The Netherlands
Phone: +31 23 568 13 00
Fax: +31 23 568 13 88
www.industrial.omron.eu